


## **Ground Light**

## Series Type: GB-H108E-NF

#### Features 產品特點 >>

- The LED ground light is ideal for both domestic and commercial applications
- The protection grade is IP67, waterproof and dust proof, safe to use
- Stable performance with built-in constant current driver,
- Made by stainless steel and aluminum, the lamp can be protected perfectly
- It's perfect for outdoor lighting such as landscape, garden, path, yard, etc
- LED地面燈是家庭和商業應用的理想選擇
- 防護等級為IP67,防水防塵,使用安全
- 內置恆定電流驅動器,性能穩定
- 燈由不銹鋼和鋁製成,可以得到完美的保護
- 非常適合戶外照明,例如景觀,花園,道路,院子等



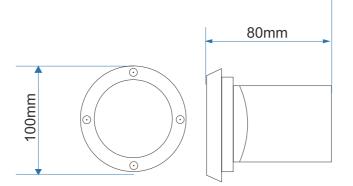

Unit: mm

### Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 光速角度	Operating Temperature 工作温度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
GB-0303-H108E-NF	85-265	3	Ø100*80	50000	3000/4000/6500	100	>80	30	-20~+45

- Light efficiency (Im/W),Power (W)Can be customized according to customer needs
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效(lm/W)、功率(W)可根據客戶需求定制
- 此型號認証由可實驗室發出之安全認証消防測試,環保物料 (RoHS),光生物安全為Exemption Group及其它測試,保証客戶使用更安心滿意

# **Ground Light**

### Series Type: GB-H108A-NF

#### Features 產品特點 >>

- The LED ground light is ideal for both domestic and commercial applications
- The protection grade is IP67, waterproof and dust proof, safe to use
- Stable performance with built-in constant current driver,
- Made by stainless steel and aluminum, the lamp can be protected perfectly
- It's perfect for outdoor lighting such as landscape, garden, path, yard, etc




- ▶ 防護等級為IP67,防水防塵,使用安全
- 內置恆定電流驅動器,性能穩定
- 燈由不銹鋼和鋁製成,可以得到完美的保護
- 非常適合戶外照明,例如景觀,花園,道路,院子等





21/22



### Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 光速角度	Operating Temperature 工作温度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
GB-0303-H108A-NF	85-265	3	Ø120*148	50000	3000/4000/6500	100	>80	30	-20~+45

- Light efficiency (lm/W),Power (W)Can be customized according to customer needs
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W) 可根據客戶需求定制
- 此型號認証由可實驗室發出之安全認証消防測試,環保物料 (RoHS),光生物安全為Exemption Group及其它測試,保証客戶使用更安心滿意

Room B3, 18/F Bonsun Industrial Building, 364-366 Sha Tsui Road, Tsuen Wan,HongKong

Phone: 852-39745593

Fax: 852-35440462

info@ilighting.com.hk

N0:7G-11-2-1