

# T5 DC LED Glass Tube




Lighting Source


1. Uniform light emission
2. High luminous output 155lm/w & low power consumption
3. SPM Design - Power circuit protection to cut off individual LEDs when mal-funtioned
4. 360 degree beam angle



Wiring diagram:

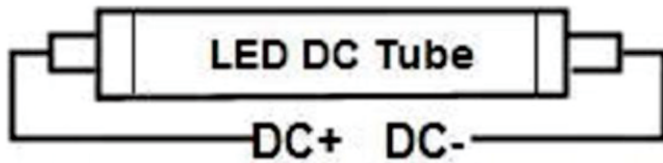

Model:LT-R51216-GP158A

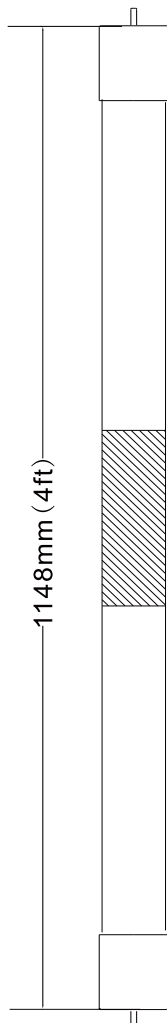

## Standard (DC Tube)

Standard size(mm)	Ø16*1148 mm
Material	Glass
Power (W)	16W (1.2 m)
Voltage(V)	DC30-42V
Beam Angle	360 degree
Luminous Efficacy	150 lm/W
Total Lumen	1.2m (2400lm)
Color Temp	3000K / 4000K / 6000K
CRI	>80
Life Span (Hrs)	up to 40,000 hours