


T8 Single Waterproof Battens

T8單隻防水支架

Series Type: IPB-GF-N-S

Features 產品特點 >>

- The lamp body design has the functions of dustproof,moisture-proof and waterproof
- Good toughness and strong impact resistance
- With high transmittance and even luminance
- With high thermal conductivity and good heat dissipation
- High elastic rubber ring seal between lamp body and mask, stainless steel clasp,
- 燈體設計具有防塵, 防潮, 防水功能
- 韌性好, 抗衝擊性強
- 透光率高, 亮度均勻
- 導熱係數高, 散熱好
- 燈體與面罩之間採用高彈性橡膠圈密封, 不銹鋼表扣

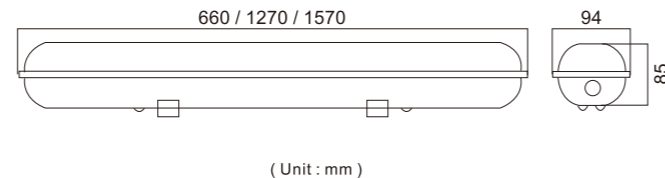

Specification 產品規格 >>

Model 型號	Size 尺寸 (mm)	Number Of Tube 燈管數量 (pcs)	Material 材料	IP Grade IP等級	Weight 重量 (kg)	Carton Size 外箱尺寸 (mm)	PCS / CTN 每箱數量 (pcs)
IPB-GF0608-N-S	660*85*94	1pcs*0.6m(2ft)	ABS+PC	IP 65	0.9	685*270*288	12
IPB-GF1208-N-S	1270*85*94	1pcs*1.2m(4ft)	ABS+PC	IP 65	1.7	1295*270*220	9
IPB-GF1508-N-S	1570*85*94	1pcs*1.5m(5ft)	ABS+PC	IP 65	2.2	1595*205*220	6

- The product is a separate bracket, which can be equipped with LED tube as required
- Lamp light effect (lm/W), power (W), color rendering index (CRI), length, can be customized according to customer needs
- 產品為單獨支架, 可按需求配備LED燈管
- 燈管光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度, 可根據客戶需求定制


T8 Double Waterproof Battens

T8雙支防水支架

Series Type: IPB-GF-N-D

Features 產品特點 >>

- The lamp body design has the functions of dustproof,moisture-proof and waterproof
- Good toughness and strong impact resistance
- With high transmittance and even luminance
- With high thermal conductivity and good heat dissipation
- High elastic rubber ring seal between lamp body and mask, stainless steel clasp,
- 燈體設計具有防塵, 防潮, 防水功能
- 韌性好, 抗衝擊性強
- 透光率高, 亮度均勻
- 導熱係數高, 散熱好
- 燈體與面罩之間採用高彈性橡膠圈密封, 不銹鋼表扣

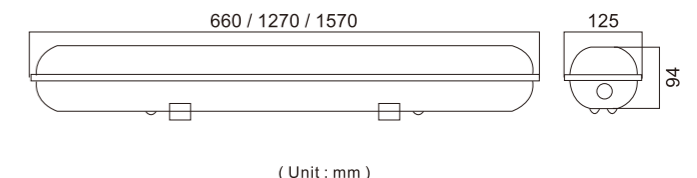

Specification 產品規格 >>

Model 型號	Size 尺寸 (mm)	Number Of Tube 燈管數量 (pcs)	Material 材料	IP Grade IP等級	Weight 重量 (kg)	Carton Size 外箱尺寸 (mm)	PCS / CTN 每箱數量 (pcs)
IPB-GF0612-N-D	660*125*94	2pcs*0.6m(2ft)	ABS+PC	IP 65	1.2	685*390*220	9
IPB-GF1212-N-D	1270*125*94	2pcs*1.2m(4ft)	ABS+PC	IP 65	2.3	1295*265*220	6
IPB-GF1512-N-D	1570*125*94	2pcs*1.5m(5ft)	ABS+PC	IP 65	3	1595*285*220	6

- The product is a separate bracket, which can be equipped with LED tube as required
- Lamp light effect (lm/W), power (W), color rendering index (CRI), length, can be customized according to customer needs
- 產品為單獨支架, 可按需求配備LED燈管
- 燈管光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度, 可根據客戶需求定制