Manual Preset Power Consumption AC T8 Tube

Series Type: DP-SW

Features 產品特點 >>

- Uniform light emission
- With 4 position dip switch selector
- Dimming range from 100% to 50% (100%, 85%, 75%, 50%)
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned

- 發光均勻
- 帶4比特dip開關選擇器
- 調光範圍從100%到50%(100%,85%,75%,50%)
- SPM設計即電源電路保護,在故障時可立即切斷單個LED电路

S1 S2 S3 S4	Power
OFF OFF OFF OFF	100%
OFF OFF ON OFF	85%
OFF ON OFF OFF	75%
ON OFF OFF OFF	50%

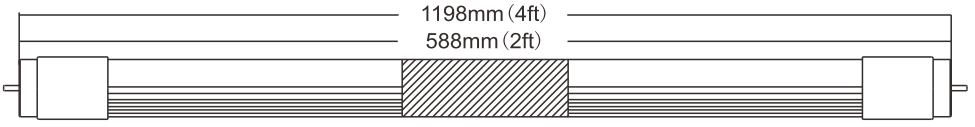

Cross-sectional



Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	PCS/CTN 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(pcs)
LT-I0609-DP128A-SW	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-DP128A-SW	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality

- 光效(lm/W)、功率(W)、顯色指數(CRI),可根據客戶需求定制
- 此型號標準之功率因素(PF)>0.9,總諧波指數THD<15%,可按客戶需要生產低總諧波指數< 10%
- 此型號認証由可實驗室發出之安全認証消防測試,環保物料(RoHS),光生物安全為Exemption Group及其它測試,保証客戶使用更安心滿意

Room B3, 18/F Bonsun Industrial Building, 364-366 Sha Tsui Road, Tsuen Wan,HongKong Phone: 852-39745593 Fax: 852-35440462 info@ilighting.com.hk