

LED Bulb

Model : BL-P-H


Features:

1. Uniform light emission
2. High luminous output 80 lm/W & low power consumption
3. No Flicker, no eye, no ultraviolet and infrared.
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. No mercury and other harmful substances, all color changes: rich color, can display vivid and delicate patterns and effects.



Model:BL-P-H

Standard

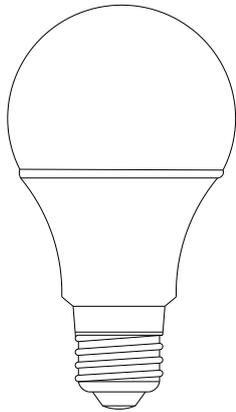

Material	PBT+PC
Standard Size(mm)	Ø50*95mm Ø55*105mm Ø60*108mm Ø65*121mm Ø70*125mm
Power (W)	3W/5W/7W/9W/12W
Voltage (V)	AC85~265V
Color Temperature	2700K-6500K
Beam Angle	180 degree
Luminous Efficacy	80lm/w
CRI	>80Ra
Power Factor	> 0.5
Life Time	30,000(H)
EMC	EN 55015:2006+A1:2007+A2:2009 EN 61547:2009 EN 61000-3-2:2006+A1:2009+A2:2009 EN 61000-3-3:2008
LVD	IEC 62560:2011