


# Light Control Time Control Corn Light

Series Type: CL-M-8

## Features 產品特點 >>

- Stable light source, uniform light, no video flicker
- Aluminum substrate light bar heat conduction, good circuit heat conduction, fast heat dissipation
- Safe drive, provide stable power for the light source
- Use international general lamp holder, anti-oxidation and anti-rust treatment

- 光源穩定, 光線均勻, 無視頻閃
- 鋁基板燈條導熱, 線路導熱良好、散熱快
- 安全驅動, 為光源提供穩定的電源
- 採用國際通用燈頭, 抗氧化防銹處理

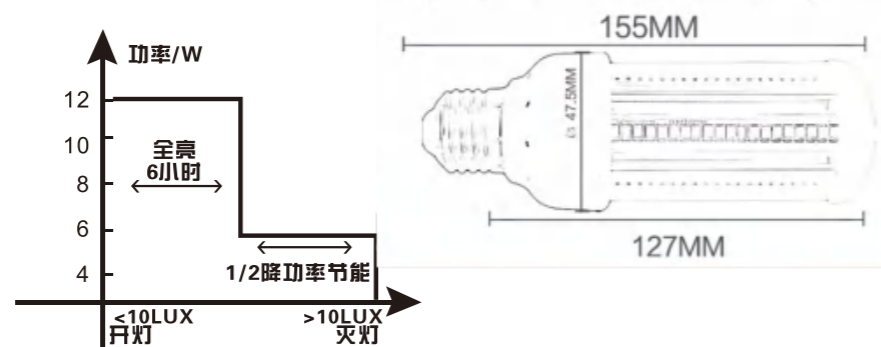

Unit : mm

## Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lighting Mode 亮燈模式	Luminous Flux 光通量	Color Rendering 顯色度
	(V)	(W)	(mm)	(Hrs)	(K)	(m)	(Lm)	(CRI)
CL-M-8	185-265	8	44	30000	3000/4000/6000	Light control + time control	≥1100	80

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意


# Light Control Time Control Corn Light

Series Type: CL-M-12

## Features 產品特點 >>

- Stable light source, uniform light, no video flicker
- Aluminum substrate light bar heat conduction, good circuit heat conduction, fast heat dissipation
- Safe drive, provide stable power for the light source
- Use international general lamp holder, anti-oxidation and anti-rust treatment

- 光源穩定, 光線均勻, 無視頻閃
- 鋁基板燈條導熱, 線路導熱良好、散熱快
- 安全驅動, 為光源提供穩定的電源
- 採用國際通用燈頭, 抗氧化防銹處理

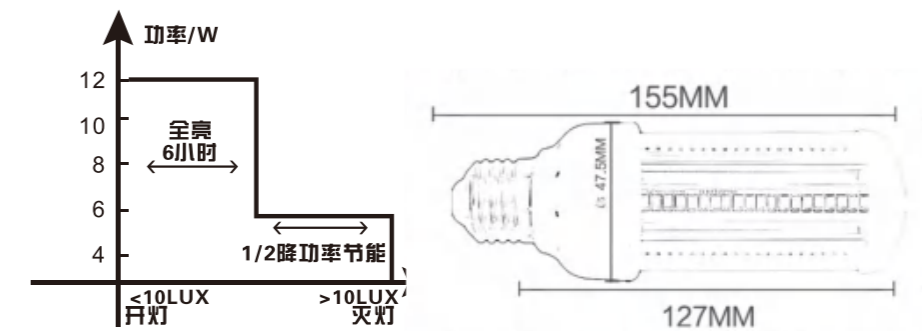

Unit : mm

## Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lighting Mode 亮燈模式	Luminous Flux 光通量	Color Rendering 顯色度
	(V)	(W)	(mm)	(Hrs)	(K)	(m)	(Lm)	(CRI)
CL-M-12	185-265	12	75	30000	3000/4000/6000	Light control + time control	≥1400	80

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意