

LED T8 DC Tube & DALI Dimming Driver

Lighting Source



**Model : LT-R06 / LT-R12/LT-R15 +
DC-LT20-DA/DC-LT40-DA**

Features:

1. Uniform light emission
2. High luminous output (100 lm/W-150lm/W)& low power consumption
3. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
4. T8 tube body to achieve the best lighting effect.
5. Dimming interface: DALI
6. Flicker free




Model:LT-R06 / LT-R12/LT-R15



Model:DC-LT20-DA/DC-LT40-DA

Standard

Tube Dimension	∅ 26.5mm*588/1198/1498mm
Voltage (V)	DC30~42V
Lamp Holder	G13
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100-150 lm/w
Power Factor	> 0.90
THD	< 15%

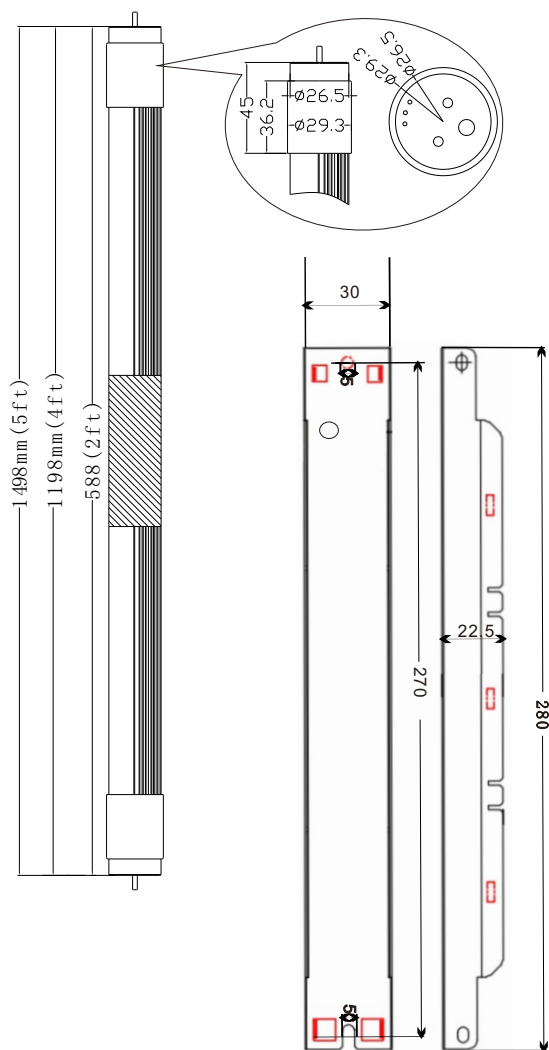

Power (W)	Model: LT-R06	9W / 100lm/W / Total 900lm 9W / 120lm/W / Total 1080lm 9W / 140lm/W / Total 1260lm 9W / 150lm/W / Total 1350lm
	Model: LT-R12	18W / 100lm/W / Total 1800lm 18W / 120lm/W / Total 2160lm 18W / 140lm/W / Total 2520lm 18W / 150lm/W / Total 2700lm
	Model: LT-R15	22W / 100lm/W / Total 2000lm 22W / 120lm/W / Total 2640lm 22W / 140lm/W / Total 3080lm 22W / 150lm/W / Total 3300lm
Cover Material	Aluminium , PC Cover	
Color Temperature	2700K/3000K/4000K/6000K	
Life Time	50,000(H)	