

## **T8 British Double Battens**

T8英式雙支架

Series Type: DBA-D-EN

### Features 產品特點 >>

- The shell adopts arc surface streamline design, beautiful appearance, novel and unique;
- Using high-quality cold-rolled steel plate, electrostatic spraying treatment, durable:
- The lamp holder adopts a cut-in and rotating design, with tight contact, safe and reliable;
- Applicable places: homes, schools, offices, conference rooms, factories, etc.
- 外殼採用弧面流線設計,造型美觀,新穎獨特;
- 採用優質冷軋鋼板,靜電噴塗處理,經久耐用;
- 燈座採用切入旋轉式設計,緊緩型接觸,安全可靠;
- 適用場所:家庭、學校、辦公室、會議室、工廠等。



## Specification 產品規格 >>

| Model<br>型號 | Size<br>尺寸 | Number Of Tube<br>燈管數量 | Material<br>材料    | IP Grade<br>IP等級 | Weight<br>重量 | Carton Size<br>外箱尺寸 | PCS / CTN<br>每箱數量 |
|-------------|------------|------------------------|-------------------|------------------|--------------|---------------------|-------------------|
|             | (mm)       | (pcs)                  |                   |                  | (kg)         | (mm)                | (pcs)             |
| DBA-D06-EN  | 614*85*48  | 2pcs*0.6m(2ft)         | Cold-rolled steel | IP 20            | 0. 66        | 64*20*20            | 8                 |
| DBA-D12-EN  | 1224*85*50 | 2pcs*1.2m(4ft)         | Cold-rolled steel | IP 20            | 1. 3         | 124*20*20           | 8                 |
| DBA-D15-EN  | 1524*85*48 | 2pcs*1.5m(5ft)         | Cold-rolled steel | IP 20            | 1. 53        | 154*20*20           | 8                 |

- The product is a separate bracket, which can be equipped with LED tube as required
- Lamp light effect (Im/W), power (W), color rendering index (CRI), length, can be customized according to customer needs
- 產品為单独支架,可按需求配備LED燈管
- 燈管光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度,可根據客戶需求定制


# **T5 British Single Battens**

T5英式單支架

Series Type: DBA-S-EN-T5

#### Features 產品特點 >>

- The shell adopts arc surface streamline design, beautiful appearance, novel and unique;
- Using high-quality cold-rolled steel plate, electrostatic spraying treatment, durable:
- The lamp holder adopts a cut-in and rotating design, with tight contact, safe and reliable;
- Applicable places: homes, schools, offices, conference rooms, factories, etc.
- 外殼採用弧面流線設計,造型美觀,新穎獨特;
- 採用優質冷軋鋼板,靜電噴塗處理,經久耐用;
- ▶ 燈座採用切入旋轉式設計,緊緩型接觸,安全可靠;
- 適用場所:家庭、學校、辦公室、會議室、工廠等。

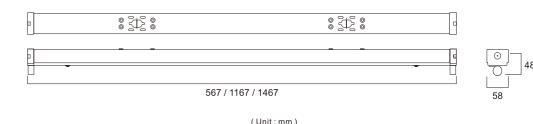

### Specification 產品規格 >>

| Model<br>型號   | Size<br>尺寸 | Number Of Tube<br>燈管數量 | Material<br>材料    | IP Grade<br>IP等級 | Weight<br>重量 | Carton Size<br>外箱尺寸 | PCS / CTN<br>每箱數量 |
|---------------|------------|------------------------|-------------------|------------------|--------------|---------------------|-------------------|
|               | (mm)       | (pcs)                  |                   |                  | (kg)         | (mm)                | (pcs)             |
| DBA-S06-EN-T5 | 567*58*48  | 1pcs*0.6m(2ft)         | Cold-rolled steel | IP 20            | 0. 62        | 60*20*20            | 8                 |
| DBA-S12-EN-T5 | 1167*58*48 | 1pcs*1.2m(4ft)         | Cold-rolled steel | IP 20            | 1. 26        | 120*20*20           | 8                 |
| DBA-S15-EN-T5 | 1467*58*48 | 1pcs*1.5m(5ft)         | Cold-rolled steel | IP 20            | 1. 5         | 150*20*20           | 8                 |

- The product is a separate bracket, which can be equipped with LED tube as required
- Lamp light effect (lm/W), power (W), color rendering index (CRI), length, can be customized according to customer needs
- 產品為单独支架,可按需求配備LED燈管
- 燈管光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度,可根據客戶需求定制

