



CATALOG

LED Lighting Series

8. Street Light & Ground

Green | Low Carbon | Energy Saving





製造和營銷綠色低碳節能照明產品
 Manufacturing And Marketing Green Low Carbon
 And Energy Saving Lighting Products

EASTLIKE LED COMPANY 東 欖 照 明 公 司

EASTLIKE LED Co., Ltd • emerges as a lighting designer manufacturer and supplier established in Hong Kong and Mainland China .
 The company devotes herself in the development, manufacturing and marketing of green, low-carbon and energy-saving lighting products. we are proud to provide a wide range of LED products

東欖LED照明公司•您的照明設計師。
 我們作為製造商和供應服務於香港和中國大陸。公司致力於開發，製造和行銷綠色，
 低碳和節能照明產品。
 我們竭誠為您服務，為您提供種類繁多的LED產品。




目录

Content

1. Street Light



2. Wall Lamp

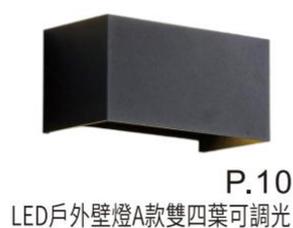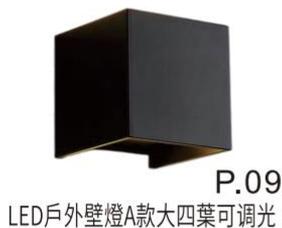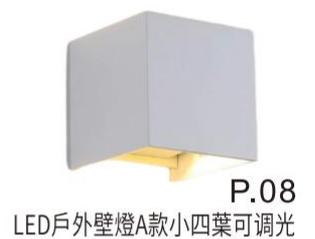



P.13
LED戶外壁燈B款豎長方形(L)



P.14
LED戶外壁燈E款梯形



P.15
LED戶外寶劍款路燈頭



P.16
LED戶外壁燈H款(8頭)



P.17
LED戶外壁燈H款(12頭)

3.floor Lamps & Pillar Lamps



P.18
LED戶外嵌入式地埋燈



P.19
LED戶外嵌入式地埋燈



P.20
LED戶外嵌入式地埋燈



P.21
LED戶外嵌入式地埋燈



P.22
LED地面燈



P.23
LED戶外柱燈





P.24
LED戶外柱燈



P.25
異型蜂巢燈

LED Outdoor Sword Road Lamp

Series Type: ESLOS05

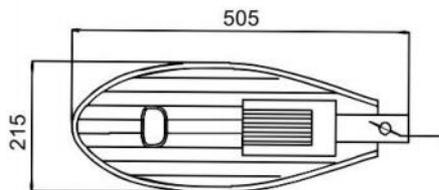

Unit : mm

Features 產品特點

- ★ Material: transparent tempered glass
 - ★ The famous Bridgelux cob LED (110lm / W) is adopted
 - ★ Instant start to save a lot of energy
 - ★ High luminous efficiency, perfect alternative to traditional street lamps
 - ★ Beautiful appearance, power saving and durable
 - ★ Certificate: CE RoHS
- ★ 材質:透明鋼化玻璃
 - ★ 採用著名的Bridgelux COB LED (110lm/w)
 - ★ 即時啟動,節省大量能源
 - ★ 高光效,完美替代傳統路燈
 - ★ 外形美觀,省電又耐用
 - ★ 證書:CE ROHS

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 光速角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
ESL-A-H	85-265	50	505*215*95	50,000	3000/4000/6500	5500	70	120	-25~45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED Outdoor Sword Road Lamp

Series Type: ESLOS07

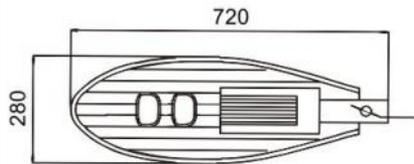

Unit : mm

Features 產品特點

- ★ Material: transparent tempered glass
 - ★ The famous Bridgelux cob LED (110lm / W) is adopted
 - ★ Instant start to save a lot of energy
 - ★ High luminous efficiency, perfect alternative to traditional street lamps
 - ★ Beautiful appearance, power saving and durable
 - ★ Certificate: CE RoHS
- ★ 材質: 透明鋼化玻璃
 - ★ 採用著名的Bridgelux COB LED (110lm/w)
 - ★ 即時啟動, 節省大量能源
 - ★ 高光效, 完美替代傳統路燈
 - ★ 外形美觀, 省電又耐用
 - ★ 證書: CE ROHS

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 光速角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
ESL-A70-H	85-265	100	720*280*90	50,000	3000/4000/6500	11000	70	120	-20~45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED Outdoor Sword Road Lamp

Series Type: ESLOS09

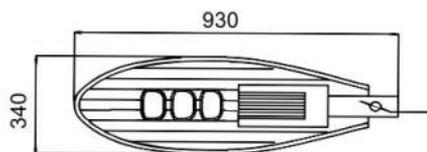

Unit : mm

Features 產品特點

- ★ Material: transparent tempered glass
 - ★ The famous Bridgelux cob LED (110lm / W) is adopted
 - ★ Instant start to save a lot of energy
 - ★ High luminous efficiency, perfect alternative to traditional street lamps
 - ★ Beautiful appearance, power saving and durable
 - ★ Certificate: CE RoHS
- ★ 材質:透明鋼化玻璃
 - ★ 採用著名的Bridgelux COB LED (110lm/w)
 - ★ 即時啟動,節省大量能源
 - ★ 高光效,完美替代傳統路燈
 - ★ 外形美觀,省電又耐用
 - ★ 證書:CE ROHS

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 光速角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
ESL-A150-H	85-265	150	930*340*95	50,000	3000/4000/6500	16500	70	120	-20~45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED Outdoor Golden Bean Street Lamp

Series Type: ESLOA05

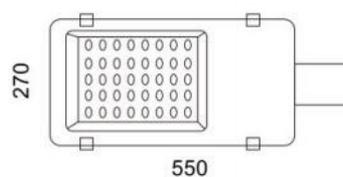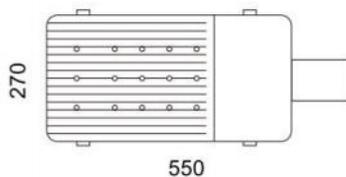

Unit : mm

Features 產品特點

- ★ Humanized timing control (3 hours 100% Watt, 2 hours 50% Watt, 3 hours 20% Watt, rainy days 2-3 days, this mode can be customized according to customers)
- ★ Maximum wattage 18v80w (high efficiency imported single crystal);
- ★ Ternary lithium battery (11.1v / 48ah)
- ★ Installation height: 6m; Pole distance: 25-30m
- ★ It is suitable for road lighting in streets, squares, parks, schools, farms, villas, gardens and other places

- ★ 人性化的定時控制(3小時100%瓦特,2小時50%瓦特,3小時20%瓦特,雨天2-3天,此模式可根據客戶定制)
- ★ 最大瓦數18V80W(高效進口單晶);三元鋰電池(11.1V/48AH)
- ★ 安裝高度:6m;桿距:25-30M
- ★ 適用於街道,廣場,公園,學校,農場,別墅,花園等場所的道路照明

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 光速角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
ESL-A30-F	85-305	50	550*270*70	50,000	3000/4000/6500	7000	70	120	-20~45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

Oval Surface Mounted Waterproof Lamp

Series Type: ECBWL1C

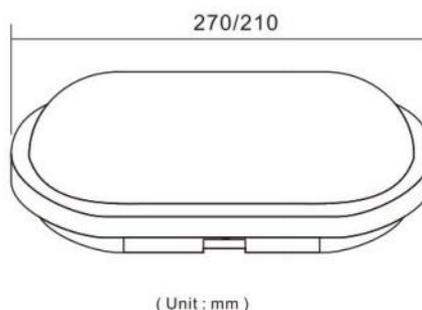

Features 產品特點

- ★ Rainproof and insect proof
- ★ Integrated design
- ★ IP65 waterproof function

- ★ 防雨防蟲
- ★ 一體化設計
- ★ IP65防水功能

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 發光角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
EWL-1022-E	85-265	22	270*140*60	30,000	3000/4000/6500	80	80	120	-20~45
EWL-0815-E	85-265	15	210*100*60	30,000	3000/4000/6500	80	80	100	-20~45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

Round Surface Mounted Waterproof Lamp

Series Type: ECBWL80

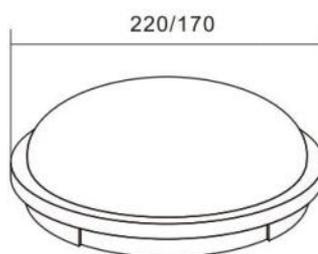

(Unit : mm)

Features 產品特點

- ★ Rainproof and insect proof
- ★ Integrated design
- ★ IP65 waterproof function

- ★ 防雨防蟲
- ★ 一體化設計
- ★ IP65防水功能

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 發光角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
EWL-0815-C	85-265	15	170*60	30,000	3000/4000/6500	80	80	120	-20~45
EWL-0822-C	85-265	22	220*60	30,000	3000/4000/6500	80	80	120	-20~45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED outdoor wall lamp Model A, small four-leaf design

Series Type: WL-A1010

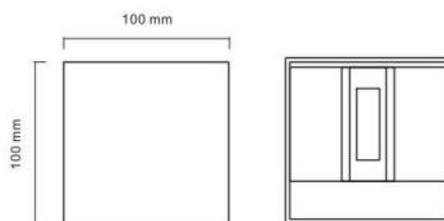

Features 產品特點

- ★ Adopt the die casting aluminum lamp body, waterproof anti-rust, strong solid, with long time
- ★ Double acrylic lampshade, the light is more uniform, soft not dazzling
- ★ High color rendering, high luminous uniform, pervious to light, the light is downy
- ★ Waterproof rating: IP65
- ★ 採用壓鑄鋁燈體, 防水防銹, 堅固耐用, 使用時間長
- ★ 雙層亞克力燈罩, 光線更均勻柔和不刺眼
- ★ 高顯色性, 高發光均勻度, 透光, 光線柔和
- ★ 防水等級: IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-A1010(black)	185-240	5	20,000	3000/4000/6500	90	80	65	100*100*100
WL-A1010(white)	185-240	5	20,000	3000/4000/6500	90	80	65	100*100*100

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED outdoor wall lamp, Type A, small four-leaf, dimmable

Series Type: WL-A1010-D

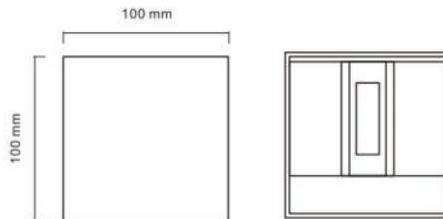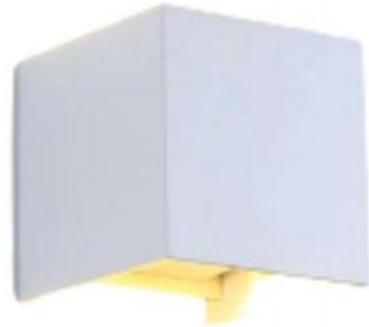

Features 產品特點

- ★ The lamp body is made of die-cast aluminum, which is waterproof, rust-resistant, sturdy, and durable, ensuring a long service life
- ★ Double-layer acrylic lampshade, ensuring a more uniform and soft light without glare
- ★ High color rendering, high luminance uniformity, good light transmittance, and soft light
- ★ Adjustable light emission angle
- ★ Waterproof grade: IP65

- ★ 采用压铸铝灯体, 防水防锈, 坚固结实, 使用寿命长
- ★ 双层亚克力灯罩, 光线更加均匀, 柔和不刺眼
- ★ 高显色性, 高发光均匀度, 透光性好, 光线柔和
- ★ 發光角度可調
- ★ 防水等级: IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-A1010-D(black)	185-240	7/12	20,000	3000/4000/6500	90	80	65	100*100*100
WL-A1010-D(white)	185-240	7/12	20,000	3000/4000/6500	90	80	65	100*100*100

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED outdoor wall lamp, Type A, large four-leaf, dimmable

Series Type: WL-A1010-D

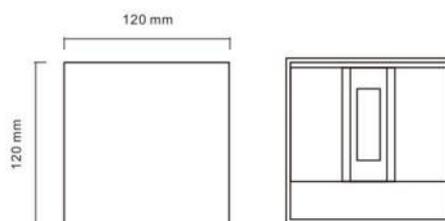

Features 產品特點

- ★ The lamp body is made of die-cast aluminum, which is waterproof, rust-resistant, sturdy, and durable, ensuring a long service life
- ★ Double-layer acrylic lampshade, ensuring a more uniform and soft light without glare
- ★ High color rendering, high luminance uniformity, good light transmittance, and soft light
- ★ Adjustable light emission angle
- ★ Waterproof grade: IP65
- ★ 采用压铸铝灯体, 防水防锈, 坚固结实, 使用寿命长
- ★ 双层亚克力灯罩, 光线更加均匀, 柔和不刺眼
- ★ 高显色性, 高发光均匀度, 透光性好, 光线柔和
- ★ 發光角度可調
- ★ 防水等级: IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-A1212-D(black)	185-240	20	20,000	3000/4000/6500	90	80	65	120*120*120
WL-A1212-D(white)	185-240	20	20,000	3000/4000/6500	90	80	65	120*120*120

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED outdoor wall lamp, Model A, dual four-leaf, dimmable

Series Type: WL-A2020-D

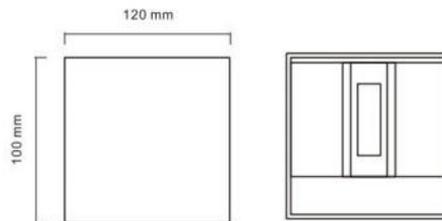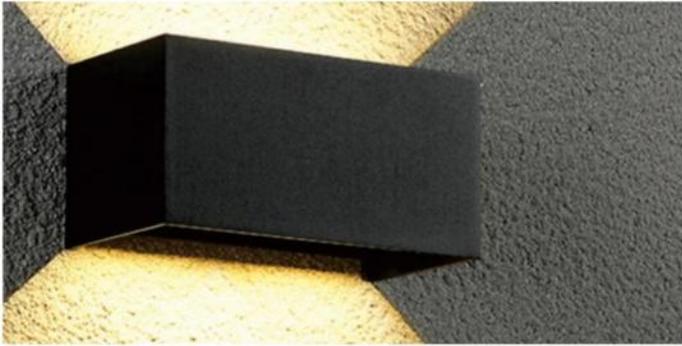

Features 產品特點

- ★ The lamp body is made of die-cast aluminum, which is waterproof, rust-resistant, sturdy, and durable, ensuring a long service life
- ★ Double-layer acrylic lampshade, ensuring a more uniform and soft light without glare
- ★ High color rendering, high luminance uniformity, good light transmittance, and soft light
- ★ Adjustable light emission angle
- ★ Waterproof grade: IP65

- ★ 采用压铸铝灯体, 防水防锈, 坚固结实, 使用寿命长
- ★ 双层亚克力灯罩, 光线更加均匀, 柔和不刺眼
- ★ 高显色性, 高发光均匀度, 透光性好, 光线柔和
- ★ 發光角度可調
- ★ 防水等级: IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-A2010-D(black)	185-240	24	20,000	3000/4000/6500	90	80	65	100*200*100
WL-A2010-D(white)	185-240	24	20,000	3000/4000/6500	90	80	65	100*200*100

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED outdoor wall lamp, Model O, semi-circular

Series Type: WL-O135

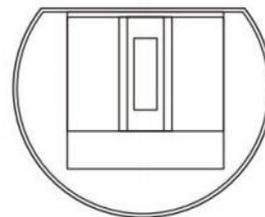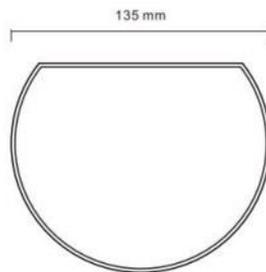

Features 產品特點

- ★ Adopt the die casting aluminum lamp body, waterproof anti-rust, strong solid, with long time
- ★ Double acrylic lampshade, the light is more uniform, soft not dazzling
- ★ High color rendering, high luminous uniform, pervious to light, the light is downy
- ★ Waterproof rating: IP65

- ★ 採用壓鑄鋁燈體，防水防銹，堅固耐用，使用時間長
- ★ 雙層亞克力燈罩，光線更均勻柔和不刺眼
- ★ 高顯色性，高發光均勻度，透光，光線柔和
- ★ 防水等級：IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-O135-12W(black)	185-240	12	20,000	3000/4000/6500	90	80	65	135*100
WL-O135-12W(white)	185-240	12	20,000	3000/4000/6500	90	80	65	135*100

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Vertical rectangular LED outdoor wall light, Model B (S)

Series Type: WL-B0916

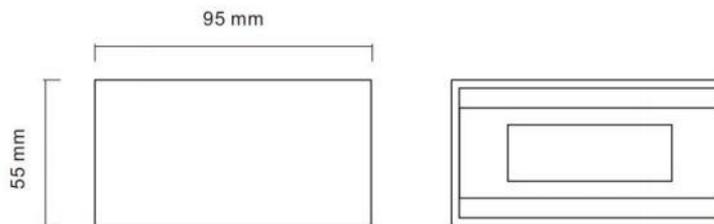

Features 產品特點

- ★ Adopt the die casting aluminum lamp body, waterproof anti-rust, strong solid, with long time
- ★ Double acrylic lampshade, the light is more uniform, soft not dazzling
- ★ High color rendering, high luminous uniform, pervious to light, the light is downy
- ★ Waterproof rating: IP65
- ★ 採用壓鑄鋁燈體, 防水防銹, 堅固耐用, 使用時間長
- ★ 雙層亞克力燈罩, 光線更均勻柔和不刺眼
- ★ 高顯色性, 高發光均勻度, 透光, 光線柔和
- ★ 防水等級: IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-B0916-10W(black)	185-240	10	20,000	3000/4000/6500	90	80	65	55*95*165
WL-B0916-10W(white)	185-240	10	20,000	3000/4000/6500	90	80	65	55*95*165

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

Vertical rectangular LED outdoor wall light, Model B (L)

Series Type: WL-B1020

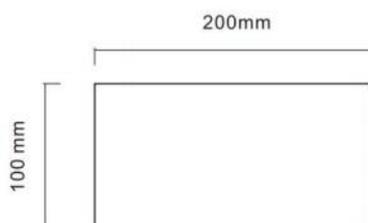

Features 產品特點

- ★ Adopt the die casting aluminum lamp body, waterproof anti-rust, strong solid, with long time
- ★ Double acrylic lampshade, the light is more uniform, soft not dazzling
- ★ High color rendering, high luminous uniform, pervious to light, the light is downy
- ★ Waterproof rating: IP65

- ★ 採用壓鑄鋁燈體, 防水防銹, 堅固耐用, 使用時間長
- ★ 雙層亞克力燈罩, 光線更均勻柔和不刺眼
- ★ 高顯色性, 高發光均勻度, 透光, 光線柔和
- ★ 防水等級: IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-B1020-14W(black)	185-240	14	20,000	3000/4000/6500	90	80	65	100*100*200
WL-B1020-14W(white)	185-240	14	20,000	3000/4000/6500	90	80	65	100*100*200

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED outdoor wall lamp, Model E, trapezoidal shape

Series Type: WL-E0820

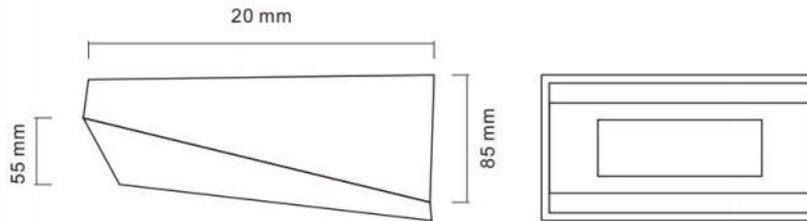

Features 產品特點

- ★ Adopt the die casting aluminum lamp body, waterproof anti-rust, strong solid, with long time
- ★ Double acrylic lampshade, the light is more uniform, soft not dazzling
- ★ High color rendering, high luminous uniform, pervious to light, the light is downy
- ★ Waterproof rating: IP65
- ★ 採用壓鑄鋁燈體, 防水防銹, 堅固耐用, 使用時間長
- ★ 雙層亞克力燈罩, 光線更均勻柔和不刺眼
- ★ 高顯色性, 高發光均勻度, 透光, 光線柔和
- ★ 防水等級: IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-E0820-10W(black)	185-240	10	20,000	3000/4000/6500	90	80	65	90*85*200

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED outdoor wall lamp, Model H (6 lights)

Series Type: WL-B1020



Features 產品特點

- ★ Adopt the die casting aluminum lamp body, waterproof anti-rust, strong solid, with long time
- ★ Double acrylic lampshade, the light is more uniform, soft not dazzling
- ★ High color rendering, high luminous uniform, pervious to light, the light is downy
- ★ Waterproof rating: IP65
- ★ 採用壓鑄鋁燈體, 防水防銹, 堅固耐用, 使用時間長
- ★ 雙層亞克力燈罩, 光線更均勻柔和不刺眼
- ★ 高顯色性, 高發光均勻度, 透光, 光線柔和
- ★ 防水等級: IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-B1020-14W(black)	185-240	14	20,000	3000/4000/6500	90	80	65	100*100*200
WL-B1020-14W(white)	185-240	14	20,000	3000/4000/6500	90	80	65	100*100*200

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED outdoor wall lamp, Model H (8 lights)

Series Type: WL-H-L8



Features 產品特點

- ★ Adopt the die casting aluminum lamp body, waterproof anti-rust, strong solid, with long time
- ★ Double acrylic lampshade, the light is more uniform, soft not dazzling
- ★ High color rendering, high luminous uniform, pervious to light, the light is downy
- ★ Waterproof rating: IP65

- ★ 採用壓鑄鋁燈體，防水防銹，堅固耐用，使用時間長
- ★ 雙層亞克力燈罩，光線更均勻柔和不刺眼
- ★ 高顯色性，高發光均勻度，透光，光線柔和
- ★ 防水等級：IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-H2209-L8(black)	185-240	8	20,000	3000/4000/6500	90	80	65	50*220*90
WL-H2209-L8(white)	185-240	8	20,000	3000/4000/6500	90	80	65	50*220*90

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

LED outdoor wall lamp, Model H (12 lights)

Series Type: WL-H-L12

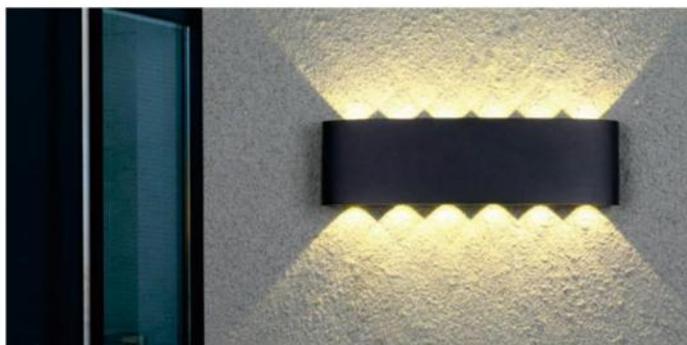

Features 產品特點

- ★ Adopt the die casting aluminum lamp body, waterproof anti-rust, strong solid, with long time
- ★ Double acrylic lampshade, the light is more uniform, soft not dazzling
- ★ High color rendering, high luminous uniform, pervious to light, the light is downy
- ★ Waterproof rating: IP65

- ★ 採用壓鑄鋁燈體, 防水防銹, 堅固耐用, 使用時間長
- ★ 雙層亞克力燈罩, 光線更均勻柔和不刺眼
- ★ 高顯色性, 高發光均勻度, 透光, 光線柔和
- ★ 防水等級: IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
WL-H3209-L12(black)	185-240	12	20,000	3000/4000/6500	90	80	65	50*320*90
WL-H3209-L12(white)	185-240	12	20,000	3000/4000/6500	90	80	65	50*320*90

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED Outdoor Embedded Buried Lamp

Series Type: ECBE045

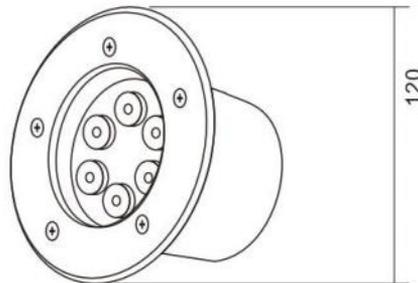

(Unit : mm)

Features 產品特點

- ★ The aluminum lamp body is integrally formed, with strong rigidity, fast heat dissipation, and corrosion resistance.
- ★ 304 stainless steel cover, wear-resistant, corrosion-resistant, and strong rigidity.
- ★ Transparent tempered glass lampshade, non yellowing, strong light transmission, wear resistance and anti-aging.
- ★ High brightness LED beads, high light efficiency, low heat generation, long lifespan, and low energy consumption.
- ★ IP65 waterproof, waterproof glue filling process+glass lampshade.
- ★ 鋁材燈體一體成型，剛性強、散熱快、耐腐蝕。
- ★ 304不銹鋼面蓋，耐磨損、抗腐蝕、剛性強。
- ★ 透明鋼化玻璃燈罩，不發黃、透光強、耐磨損、抗老化。
- ★ 高亮度LED燈珠，光效高、發熱少、壽命長、能耗低。
- ★ IP65防水，防水灌膠工藝+玻璃燈罩。

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 發光角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
EGB-0506	85-265	6	120*90	5000	3000/4000	80	80	90	-20~45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

LED Outdoor Embedded Buried Lamp

Series Type: ECBE060

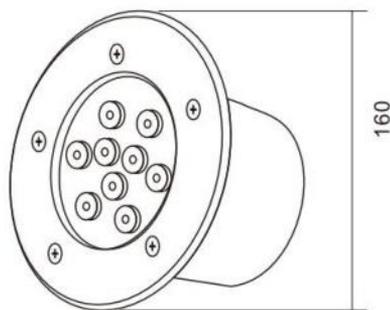

(Unit : mm)

Features 產品特點

- ★ The aluminum lamp body is integrally formed, with strong rigidity, fast heat dissipation, and corrosion resistance.
- ★ 304 stainless steel cover, wear-resistant, corrosion-resistant, and strong rigidity.
- ★ Transparent tempered glass lampshade, non yellowing, strong light transmission, wear resistance and anti-aging.
- ★ High brightness LED beads, high light efficiency, low heat generation, long lifespan, and low energy consumption.
- ★ IP65 waterproof, waterproof glue filling process+glass lampshade.
- ★ 鋁材燈體一體成型, 剛性強、散熱快、耐腐蝕。
- ★ 304不銹鋼面蓋, 耐磨損、抗腐蝕、剛性強。
- ★ 透明鋼化玻璃燈罩, 不發黃、透光強、耐磨損、抗老化。
- ★ 高亮度LED燈珠, 光效高、發熱少、壽命長、能耗低。
- ★ IP65防水, 防水灌膠工藝+玻璃燈罩。

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 發光角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
EGB-0609	85-265	9	160*90	5000	3000/4000	80	80	90	-20~45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED Outdoor Embedded Buried Lamp

Series Type: ECBE070

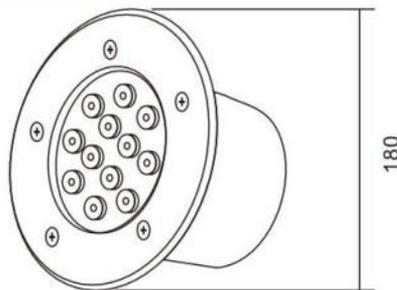

(Unit : mm)

Features 產品特點

- ★ The aluminum lamp body is integrally formed, with strong rigidity, fast heat dissipation, and corrosion resistance.
- ★ 304 stainless steel cover, wear-resistant, corrosion-resistant, and strong rigidity.
- ★ Transparent tempered glass lampshade, non yellowing, strong light transmission, wear resistance and anti-aging.
- ★ High brightness LED beads, high light efficiency, low heat generation, long lifespan, and low energy consumption.
- ★ IP65 waterproof, waterproof glue filling process+glass lampshade.
- ★ 鋁材燈體一體成型，剛性強、散熱快、耐腐蝕。
- ★ 304不銹鋼面蓋，耐磨損、抗腐蝕、剛性強。
- ★ 透明鋼化玻璃燈罩，不發黃、透光強、耐磨損、抗老化。
- ★ 高亮度LED燈珠，光效高、發熱少、壽命長、能耗低。
- ★ IP65防水，防水灌膠工藝+玻璃燈罩。

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 發光角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
EGB-0712	85-265	12	180*90	5000	3000/4000	80	80	90	-20~45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED Outdoor Embedded Buried Lamp

Series Type: ECBE080

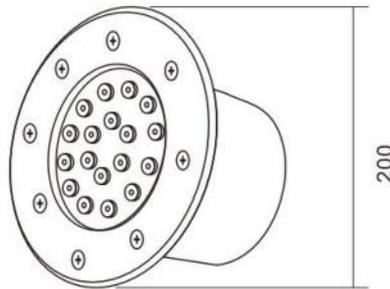

(Unit : mm)

Features 產品特點

- ★ The aluminum lamp body is integrally formed, with strong rigidity, fast heat dissipation, and corrosion resistance.
- ★ 304 stainless steel cover, wear-resistant, corrosion-resistant, and strong rigidity.
- ★ Transparent tempered glass lampshade, non yellowing, strong light transmission, wear resistance and anti-aging.
- ★ High brightness LED beads, high light efficiency, low heat generation, long lifespan, and low energy consumption.
- ★ IP65 waterproof, waterproof glue filling process+glass lampshade.

- ★ 鋁材燈體一體成型，剛性強、散熱快、耐腐蝕。
- ★ 304不銹鋼面蓋，耐磨損、抗腐蝕、剛性強。
- ★ 透明鋼化玻璃燈罩，不發黃、透光強、耐磨損、抗老化。
- ★ 高亮度LED燈珠，光效高、發熱少、壽命長、能耗低。
- ★ IP65防水，防水灌膠工藝+玻璃燈罩。

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 發光角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(°C)
EGB-0818	85-265	18	200*90	5000	3000/4000	80	80	90	-20~45

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

LED Ground Light

Series Type: GB-ST-G

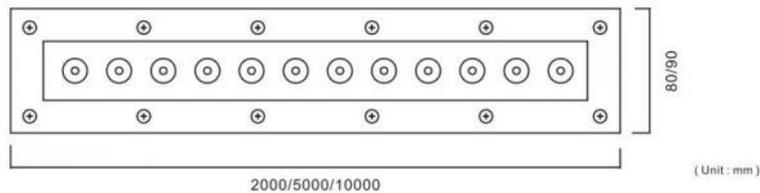

Features 產品特點

- ★ High color rendering light source.
 - ★ No visible flicker.
 - ★ Stable power.
 - ★ Soft light.
 - ★ Waterproof rating: IP65
- ★ 高顯色光源。
 - ★ 無可見閃爍。
 - ★ 穩定的電力。
 - ★ 柔和的光線。
 - ★ 防水等級: IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
GB-ST200-G	12/24	3	20,000	3000/4000/6500	45	90	65	2000*800*500
GB-ST200-G	12/24	3	20,000	RGB七彩漸層	45	90	65	2000*800*500
GB-ST200-G	12/24	5	20,000	3000/4000/6500	45	90	65	2000*800*500
GB-ST200-G	12/24	5	20,000	RGB七彩漸層	45	90	65	2000*800*500
GB-ST500-G	12/24	12	20,000	3000/4000/6500	45	90	65	5000*900*900
GB-ST500-G	12/24	12	20,000	RGB七彩漸層	45	90	65	5000*900*900
GB-ST1000-G	12/24	18	20,000	3000/4000/6500	45	90	65	10000*900*900
GB-ST1000-G	12/24	18	20,000	RGB七彩漸層	45	90	65	10000*900*900
GB-ST1000-G	12/24	24	20,000	3000/4000/6500	45	90	65	10000*900*900
GB-ST1000-G	12/24	24	20,000	RGB七彩漸層	45	90	65	10000*900*900
GB-ST1000-G	12/24	36	20,000	3000/4000/6500	45	90	65	10000*900*900
GB-ST1000-G	12/24	36	20,000	RGB七彩漸層	45	90	65	10000*900*900

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED outdoor pillar lights

Series Type: GL-OL-SL

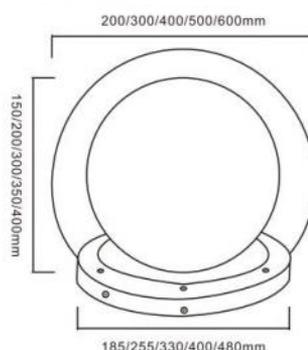

Features 產品特點

- ★ High color rendering light source.
- ★ No visible flicker.
- ★ Stable power.
- ★ Soft light.
- ★ Waterproof rating: IP65

- ★ 高顯色光源。
- ★ 無可見閃爍。
- ★ 穩定的電力。
- ★ 柔和的光線。
- ★ 防水等級: IP65

Specification 產品規格

Model 型號	Voltage 電壓 (V)	Wattage 功率 (W)	Lamp Life 光度壽命 (Hrs)	Colour Temp 色溫 (K)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Waterproof rating 防水等級 (IP)	Size 尺寸 (mm)
GL-OL200-SL	185-240	5W/E27	20,000	3000/4000/6500	100	80	65	外徑200/內徑150/底座185
GL-OL300-SL	185-240	5W/E27	20,000	3000/4000/6500	100	80	65	外徑300/內徑200/底座255
GL-OL400-SL	185-240	5W/E27	20,000	3000/4000/6500	100	80	65	外徑400/內徑300/底座330
GL-OL500-SL	185-240	5W/E27	20,000	3000/4000/6500	100	80	65	外徑500/內徑350/底座400
GL-OL600-A	185-240	5W/E27	20,000	3000/4000/6500	100	80	65	外徑600/內徑400/底座480

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

LED outdoor pillar lights

Series Type:GL-OL-A

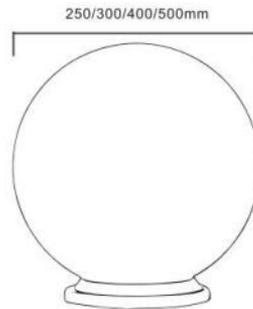

Features 產品特點

- ★ High color rendering light source.
- ★ No visible flicker.
- ★ Stable power.
- ★ Soft light.
- ★ Waterproof rating: IP65

- ★ 高顯色光源。
- ★ 無可見閃爍。
- ★ 穩定的電力。
- ★ 柔和的光線。
- ★ 防水等級:IP65

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
GL-OL250-A	185-240	5W/E27	20,000	3000/4000/6500	100	80	65	Φ250
GL-OL300-A	185-240	5W/E27	20,000	3000/4000/6500	100	80	65	Φ300
GL-OL400-A	185-240	5W/E27	20,000	3000/4000/6500	100	80	65	Φ400
GL-OL500-A	185-240	5W/E27	20,000	3000/4000/6500	100	80	65	Φ500

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

Irregular honeycomb lights

Series Type: IPIL-SLP-H



Features 產品特點

- ★ High color rendering light source.
- ★ No visible flicker.
- ★ Stable power.
- ★ Soft light.

- ★ 高顯色光源。
- ★ 無可見閃爍。
- ★ 穩定的電力。
- ★ 柔和的光線。

Specification 產品規格

Model 型號	Voltage 電壓	Wattage 功率	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Waterproof rating 防水等級	Size 尺寸
	(V)	(W)	(Hrs)	(K)	(Lm/W)	(CRI)	(IP)	(mm)
IPIL-SLP-HC01	185-240	48	20,000	3000/4000/6500	80	80	20	814*940
IPIL-SLP-HC02	185-240	88	20,000	3000/4000/6500	80	80	20	814*940
IPIL-SLP-HC03-A	185-240	125	20,000	3000/4000/6500	80	80	20	2442*940
IPIL-SLP-HC03-B	185-240	120	20,000	3000/4000/6500	80	80	20	1628*1646
IPIL-SLP-HC04-A	185-240	168	20,000	3000/4000/6500	80	80	20	3256*940
IPIL-SLP-HC04-B	185-240	152	20,000	3000/4000/6500	80	80	20	2350*1628
IPIL-SLP-HC05-A	185-240	184	20,000	3000/4000/6500	80	80	20	2442*1645
IPIL-SLP-HC05-B	185-240	192	20,000	3000/4000/6500	80	80	20	2442*1645
IPIL-SLP-HC06	185-240	248	20,000	3000/4000/6500	80	80	20	2442*2350
IPIL-SLP-HC07-A	185-240	248	20,000	3000/4000/6500	80	80	20	3256*1645
IPIL-SLP-HC07-B	185-240	240	20,000	3000/4000/6500	80	80	20	2442*2350
IPIL-SLP-HC08	185-240	280	20,000	3000/4000/6500	80	80	20	2442*2350
IPIL-SLP-HC09	185-240	312	20,000	3000/4000/6500	80	80	20	4070*1645
IPIL-SLP-HC11	185-240	368	20,000	3000/4000/6500	80	80	20	3256*2350
IPIL-SLP-HC14	185-240	456	20,000	3000/4000/6500	80	80	20	4070*2350

東 攏 照 明 公 司
EASTLIKE LED COMPANY



Office Address: Room B3, 18/F Bonsun Industrial Building,
364-366 Sha Tsui Road, Tsuen Wan, HongKong

Phone: 852-3107 7500

Fax: 852-3544 0462

Whatsapp: 852-5977 2627

Email: info@eastlike.com