

LDF (30W-200W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY



Ultra thin curved smooth surface lamp body streamlined design, no water accumulation, no dust accumulation
超薄弧形光滑面灯体流线型设计,不积水,不积灰

Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)
品牌驱动,高转换效率、高功率因素、高防雷等特点 (1-10V,DALI2.0)

Optical PC lens, IK08 anti-collision rating, UV resistance, transmittance of 94%
光学PC透镜, IK08防撞等级, 抗UV, 透光率94%



Horizontal positioning instrument is easy to install
水平定位仪便于安装

Suitable for express road, branch road, auxiliary road, factory, park and other places
适用于快速路、支路、辅路、厂区、公园等场所

Product specs 产品参数

| Model 产品型号 | IL-LDF30 | IL-LDF50 | IL-LDF100 | IL-LDF150 | IL-LDF200 |
|-------------------|---------------------------------|------------|------------|------------|------------|
| Dimension尺寸(mm) | 429*110*45 | 465*180*52 | 529*220*54 | 601*240*58 | 691*276*58 |
| Power功率 | 30W | 50W | 100W | 150W | 200W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | |
| LED Brand 芯片品牌 | Lumileds /CREE | | | | |
| CRI显指 | Ra>70/80/90 | | | | |
| Efficiency光效 | 150LM/W±10% | | | | |
| Total Flux(lm)光通量 | 4500lm | 7500lm | 15000lm | 22500lm | 30000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | |
| Beam Angle发光角度 | TYPE 2 | | | | |
| IP Grade防护等级 | IP66 | | | | |

Distribution Curve Flux 配光曲线

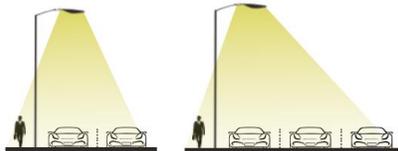

Application scenarios 应用场景



LDH (50W-200W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源,高亮度、低光衰、寿命长

Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)
品牌驱动,高转换效率、高功率因素、高防雷等特点 (1-10V,DALI2.0)

Optical PC lens, IK08 anti-collision rating, UV resistance, transmittance of 94%
光学PC透镜, IK08防撞等级, 抗UV, 透光率94%



ADC12 die-cast aluminum,surface UVspray resistance,salt spray 500 hours
ADC12压铸铝,表面抗UV喷涂,盐雾500小时

Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc
高速公路,高架路,市区街道,天桥,人行道,广场,学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDH50 | IL-LDH80 | IL-LDH100 | IL-LDH150 | IL-LDH200 |
|-------------------|---------------------------------|------------|------------|------------|------------|
| Dimension尺寸(mm) | 472*178*67 | 545*200*55 | 572*240*65 | 642*258*65 | 675*298*65 |
| Power功率 | 50W | 80W | 100W | 150W | 200W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | |
| CRI显指 | Ra>70/80 | | | | |
| Efficiency光效 | 130LM/W±10% | | | | |
| Total Flux(lm)光通量 | 6500lm | 10400lm | 13000lm | 19500lm | 26000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | |
| Beam Angle发光角度 | TYPE3/TYPER4/TYPER5 | | | | |
| IP Grade防护等级 | IP66 | | | | |

Distribution curve flux 配光曲线

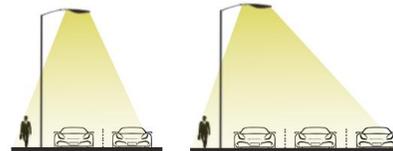

Application scenarios 应用场景



LDM (50W-200W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
 进口Lumileds光源, 高亮度、低光衰、寿命长
 Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)
 品牌驱动, 高转换效率、高功率因素、高防雷等特点 (1-10V,DALI2.0)
 Buckle type installation, tool free disassembly
 卡扣式安装,免工具拆卸
 ADC12 die-cast aluminum,surface UVsray resistance,salt spray 500 hours
 ADC12压铸铝, 表面抗UV喷涂, 盐雾500小时
 Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc
 高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDM50 | IL-LDM100 | IL-LDM150 | IL-LDM200 | IL-LDM240 |
|-------------------|---------------------------------|------------|------------|------------|------------|
| Dimension尺寸(mm) | 520*210*70 | 560*260*70 | 660*260*70 | 720*260*70 | 720*260*70 |
| Power功率 | 50W | 100W | 150W | 200W | 240W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | |
| CRI显指 | Ra>70/80 | | | | |
| Efficiency光效 | 135LM/W±10% | | | | |
| Total Flux(lm)光通量 | 6750lm | 13500lm | 20250lm | 27000lm | 32400lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | |
| Beam Angle发光角度 | T3 | | | | |
| IP Grade防护等级 | IP66 | | | | |

Distribution Curve Flux 配光曲线

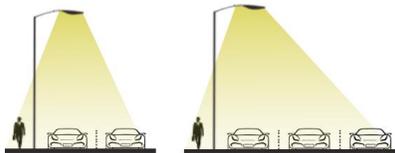

Application scenarios 应用场景



LDL (50W-200W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
 进口Lumileds光源, 高亮度、低光衰、寿命长
 Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)
 品牌驱动, 高转换效率、高功率因素、高防雷等特点 (1-10V,DALI2.0)
 Optical PC lens+4mm tempered glass, IK08 anti-collision rating, UV resistance, 94% transmittance
 光学PC透镜, 外加4mm钢化玻璃, IK08防撞等级, 抗UV, 透光率94%
 ADC12 die-cast aluminum,surface UVsray resistance,salt spray 500 hours
 ADC12压铸铝, 表面抗UV喷涂, 盐雾500小时
 Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc
 高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDL50 | IL-LDL100 | IL-LDL150 | IL-LDL200 |
|-------------------|---------------------------------|-------------|-------------|-------------|
| Dimension尺寸(mm) | 555*200*105 | 615*233*100 | 675*260*100 | 726*310*113 |
| Power功率 | 50W | 100W | 150W | 200W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | |
| LED Brand 芯片品牌 | Lumileds | | | |
| CRI显指 | Ra>70/80 | | | |
| Efficiency光效 | 135LM/W±10% | | | |
| Total Flux(lm)光通量 | 6750lm | 13500lm | 20250lm | 27000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | |
| Beam Angle发光角度 | T2/T3 | | | |
| IP Grade防护等级 | IP66 | | | |

Distribution curve flux 配光曲线

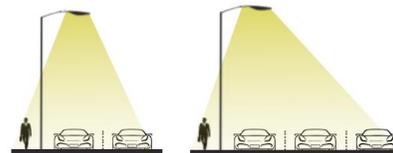

Application scenarios 应用场景



LDA (50W-200W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
 进口Lumileds光源, 高亮度、低光衰、寿命长
 Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)
 品牌驱动, 高转换效率、高功率因素、高防雷等特点 (1-10V,DALI2.0)
 Optical PC lens, IK08 anti-collision grade, UV resistant, transmittance up to 94%, professional optical allocation: T2/T3/T4
 光学PC透镜+钢化玻璃, IK08防撞等级, 耐紫外线, 透光率达94%, 专业光学分配:T2/T3/T4
 ADC12 die-cast aluminum,surface UVspray resistance,salt spray 500 hours
 ADC12压铸铝, 表面抗UV喷涂, 盐雾500小时
 Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc
 高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDA50 | IL-LDA100 | IL-LDA150 | IL-LDA200 |
|-------------------|---------------------------------|-----------------|-----------------|-----------------|
| Dimension尺寸(mm) | 483.2*230*114.4 | 548.2*230*114.4 | 598.2*257*117.1 | 654.6*320*121.9 |
| Power功率 | 50W | 100W | 150W | 200W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | |
| LED Brand 芯片品牌 | Lumileds | | | |
| CRI显指 | Ra>70/80 | | | |
| Efficiency光效 | 140LM/W±10% | | | |
| Total Flux(lm)光通量 | 7000lm | 14000lm | 21000lm | 28000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | |
| Beam Angle发光角度 | T2/T3/T4 | | | |
| IP Grade防护等级 | IP66 | | | |

Distribution Curve Flux 配光曲线

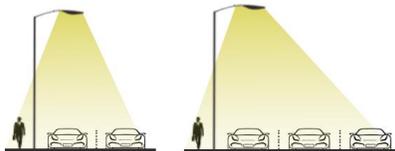

Application scenarios 应用场景



LDG (50W-200W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
 进口Lumileds光源, 高亮度、低光衰、寿命长
 Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)
 品牌驱动, 高转换效率、高功率因素、高防雷等特点 (1-10V,DALI2.0)
 Optical PC lens, IK08 anti-collision rating, UV resistance, 94% transmittance
 光学PC透镜, IK08防撞等级, 抗UV, 透光率94%
 ADC12 die-cast aluminum,surface UVspray resistance,salt spray 500 hours
 ADC12压铸铝, 表面抗UV喷涂, 盐雾500小时
 Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc
 高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDG50 | IL-LDG100 | IL-LDG150 | IL-LDG200 |
|-------------------|-------------------------------|---------------|-----------------|-------------|
| Dimension尺寸(mm) | 407.6*230*105.8 | 508.5*230*105 | 600.5*257*108.5 | 719*303*121 |
| Power功率 | 50W | 100W | 150W | 200W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | |
| LED Brand 芯片品牌 | Lumileds | | | |
| CRI显指 | Ra>70/80 | | | |
| Efficiency光效 | 140LM/W±10% | | | |
| Total Flux(lm)光通量 | 7000lm | 14000lm | 21000lm | 28000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | |
| LED Driver 驱动电源 | MEAN WELL /MOSO/ Inventronics | | | |
| Beam Angle发光角度 | T2/T3/T4 | | | |
| IP Grade防护等级 | IP66 | | | |

Distribution curve flux 配光曲线

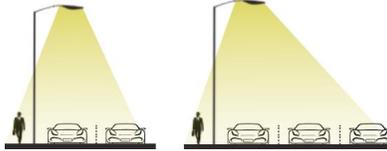

Application scenarios 应用场景



LDT (30W-300W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)
品牌驱动, 高转换效率、高功率因素、高防雷等特点 (1-10V,DALI2.0)
Optical PC lens, IK08 anti-collision grade, UV resistant, transmittance up to 94%, professional optical allocation: T2/T3/T4
光学PC透镜+钢化玻璃, IK08防碰撞等级, 耐紫外线, 透光率达94%, 专业光学分配:T2/T3/T4
Top-open, tool free maintenance structure
上开盖, 免工具维护结构
Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc
高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDT50 | IL-LDT100 | IL-LDT180 | IL-LDT240 | IL-LDT300 |
|-------------------|---------------------------------|---------------|---------------|---------------|-------------|
| Dimension尺寸(mm) | 588x210x110 | 600x258x110 | 700x258x110 | 705x308x110 | 788x335x115 |
| Power功率 | 30W/50W | 80W/100W | 150W/180W | 200W/240W | 300W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | |
| CRI显指 | Ra > 70/80 | | | | |
| Efficiency光效 | 170LM/W ± 10% | | | | |
| Total Flux(lm)光通量 | 5100/8500lm | 13600/17000lm | 25500/30600lm | 27200/40800lm | 51000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | |
| Beam Angle发光角度 | 60°/90°/120°/T2M/T3M/T4M | | | | |
| IP Grade防护等级 | IP66 | | | | |

Distribution Curve Flux 配光曲线

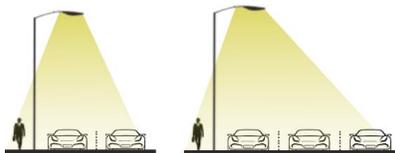

Application scenarios 应用场景



LDB (50W-240W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY





ADC12 die-cast aluminum, surface UV spray resistance, salt spray 500 hours
ADC12压铸铝, 表面抗UV喷涂, 盐雾500小时
Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)
品牌驱动, 高转换效率、高功率因素、高防雷等特点 (1-10V,DALI2.0)
Optical PC lens, IK08 anti-collision grade, UV resistant, transmittance up to 94%
光学PC透镜, IK08防碰撞等级, 耐紫外线, 透光率达94%
Smooth flowing back shape, easy to clean and maintain
背部光面流线形外形, 易清洁维护
Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc
高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDB50 | IL-LDB80 | IL-LDB100 | IL-LDB150 | IL-LDB200 | IL-LDB240 |
|-------------------|---------------------------------|-------------|-------------|-------------|-------------|-------------|
| Dimension尺寸(mm) | 493*174*108 | 562*200*108 | 607*240*108 | 680*260*108 | 766*300*108 | 766*300*108 |
| Power功率 | 50W | 80W | 100W | 150W | 200W | 240W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | | |
| CRI显指 | Ra > 70/80 | | | | | |
| Efficiency光效 | 180LM/W ± 10% | | | | | |
| Total Flux(lm)光通量 | 9000lm | 14400lm | 18000lm | 27000lm | 36000lm | 43200lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | | |
| Beam Angle发光角度 | T2S/T2M/T3M | | | | | |
| IP Grade防护等级 | IP66 | | | | | |

Distribution curve flux 配光曲线

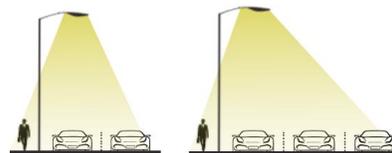

Application scenarios 应用场景



LDU (30W-300W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)
品牌驱动, 高转换效率、高功率因素、高防雷等特点 (1-10V, DALI2.0)
Optical PC lens, IK08 anti-collision grade, UV resistant, transmittance up to 94%, professional optical allocation: T2/T3/T4
光学PC透镜+钢化玻璃, IK08防碰撞等级, 耐紫外线, 透光率达94%, 专业光学分配:T2/T3/T4
ADC12 die-cast aluminum, surface UV spray resistance, salt spray 500 hours
ADC12压铸铝, 表面抗UV喷涂, 盐雾500小时
Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc
高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDU30 | IL-LDU50 | IL-LDU100 | IL-LDU150 | IL-LDU200 | IL-LDU300 |
|-------------------|-------------------------------------|--------------|--------------|--------------|--------------|--------------|
| Dimension尺寸(mm) | 510*175*98.5 | 560*196*98.5 | 610*245*98.5 | 661*245*98.5 | 712*300*98.5 | 714.3*340*97 |
| Power功率 | 30W | 50W | 100W | 150W | 200W | 300W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | | |
| CRI显指 | Ra > 70/80 | | | | | |
| Efficiency光效 | 130LM/W ± 10% | | | | | |
| Total Flux(lm)光通量 | 3900lm | 6500lm | 13000lm | 19500lm | 26000lm | 39000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | | |
| Beam Angle发光角度 | 30°/60°/90°/TYPE2/TYPE3/TYPE4/TYPE5 | | | | | |
| IP Grade防护等级 | IP66 | | | | | |

Distribution Curve Flux 配光曲线

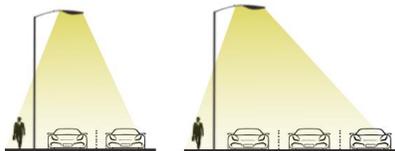

Application scenarios 应用场景



LDD (50W-150W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Separation of leds and driver cavity
光源电源腔体分离
Buckle type installation, tool free disassembly
卡扣式安装, 免工具拆卸
Anti-glare lens with large luminous surface
超大发光面防眩透镜
Outdoor road lighting for streets, rural roads, sidewalks, urban roads, parks, squares, scenic spots, industrial parks, etc
适用于街道、乡村道路、人行道、城镇道路、公园、广场、景区、工业园、生活区等户外道路照明

Product specs 产品参数

| Model 产品型号 | IL-LDD50 | IL-LDD100 | IL-LDD150 |
|-------------------|---------------------------------|-------------|-------------|
| Dimension尺寸(mm) | 425*200*121 | 540*256*125 | 598*256*125 |
| Power功率 | 50W | 100W | 150W |
| Voltage输入电压 | AC100-277V 50/60Hz | | |
| LED Brand 芯片品牌 | Lumileds | | |
| CRI显指 | Ra > 70/80 | | |
| Efficiency光效 | 140LM/W ± 10% | | |
| Total Flux(lm)光通量 | 7000lm | 14000lm | 21000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | |
| Beam Angle发光角度 | TYPE 2/TYPE3/TYPE5 | | |
| IP Grade防护等级 | IP66 | | |

Distribution curve flux 配光曲线

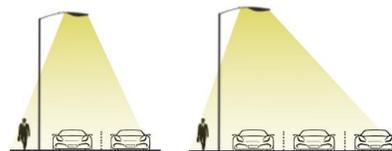

Application scenarios 应用场景



LDK (50W-200W)

路灯
专业美式照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY



Smooth flowing back shape, easy to clean and maintain

背部光面流线外形, 易清洁维护

Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)

品牌驱动, 高转换效率、高功率因素、高防雷等特点 (1-10V, DALI2.0)

ADC12 die-cast aluminum, surface UV spray resistance, salt spray 500 hours

ADC12压铸铝, 表面抗UV喷涂, 盐雾500小时

Optical PC lens, IK08 anti-collision grade, UV resistant, transmittance up to 94%, professional optical allocation: T2/T3

光学PC透镜+钢化玻璃, IK08防碰撞等级, 耐紫外线, 透光率达94%, 专业光学分配:T2/T3



Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc

高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDK50 | IL-LDK100 | IL-LDK150 | IL-LDK200 | IL-LDK240 |
|-------------------|---------------------------------|-------------|-------------|-------------|-------------|
| Dimension尺寸(mm) | 558*200*115 | 612*233*115 | 675*260*115 | 775*320*115 | 775*320*115 |
| Power功率 | 50W | 100W | 150W | 200W | 240W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | |
| CRI显指 | Ra>70/80 | | | | |
| Efficiency光效 | 130LM/W±10% | | | | |
| Total Flux(lm)光通量 | 6500lm | 13000lm | 19500lm | 26000lm | 31200lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | |
| Beam Angle发光角度 | T2/T3 | | | | |
| IP Grade防护等级 | IP66 | | | | |

Distribution Curve Flux 配光曲线

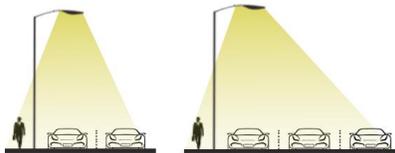

Application scenarios 应用场景



LDC (30W-150W)

路灯
专业市政照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan

进口Lumileds光源, 高亮度、低光衰、寿命长

Brand driven, high conversion efficiency, high power factor, lightning protection and other characteristics (1-10V, DALI2.0)

品牌驱动, 高转换效率、高功率因素、高防雷等特点

All aluminum A1070 aluminum stamping process, high thermal conductivity, compact and solid structure

全铝A1070铝冲压工艺, 高导热性能, 结构紧凑扎实

Optical PC lens IK08 anti-collision grade, UV resistant, transmittance of 94%, professional optical distribution: 75° * 140°

光学PC透镜IK08防碰撞等级, 耐紫外线, 透光率达94%, 专业光学分配:75°*140°

Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc

高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDC30 | IL-LDC40 | IL-LDC60 | IL-LDC90 | IL-LDC120 | IL-LDC150 |
|-------------------|---------------------------------|----------------|----------------|----------------|----------------|----------------|
| Dimension尺寸(mm) | 365.8*135*84.4 | 365.8*135*89.3 | 431.3*160*89.3 | 431.3*160*89.3 | 431.3*160*89.3 | 431.3*160*89.3 |
| Power功率 | 30W | 40W | 60W | 90W | 120W | 150W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | | |
| CRI显指 | Ra>70/80 | | | | | |
| Efficiency光效 | 110LM/W±10% | | | | | |
| Total Flux(lm)光通量 | 3300lm | 4400lm | 6600lm | 9900lm | 13200lm | 16500lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | | |
| Beam Angle发光角度 | 75°140° | | | | | |
| IP Grade防护等级 | IP66 | | | | | |

Distribution curve flux 配光曲线



Application scenarios 应用场景



LDE (100W-300W)

鞋盒灯
专业美式照明

PARKING LIGHT

CE RoHS 5YEAR WARRANTY



Adopting high-power LED patch (3030&5050) light source, the power supply can be matched with any brand
采用大功率LED贴片 (3030&5050) 光源, 电源可匹配任何品牌

The top or side of the lamp post is connected, with a positive or negative 180 degree angle

灯杆顶部或侧面接入, 正负180度角

ADC12 die-casting, high thermal conductivity, fully guarantees the 50000 hour service life of LED shoe box lights

ADC12压铸, 高热导率, 充分保证了LED鞋盒灯50000小时的使用寿命

PC protective lens, highly corrosion-resistant and UV resistant, suitable for coastal areas

PC防护透镜, 高防腐蚀和抗紫外线, 适用于沿海地区



Lighting in public areas such as streets, parking lots, parks, courtyards, squares, roads, and buildings

街道、停车场、公园、庭院、广场、道路、建筑等公共区域照明

Product specs 产品参数

| Model 产品型号 | IL-LDE100 | IL-LDE150 | IL-LDE200 | IL-LDE240 | IL-LDE300 |
|-------------------|---------------------------------|----------------|----------------|----------------|----------------|
| Dimension尺寸(mm) | 519.3*210*80.7 | 564.8*250*80.7 | 589.3*280*80.7 | 674.3*300*84.9 | 674.3*300*84.9 |
| Power功率 | 100W | 150W | 200W | 240W | 300W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | |
| CRI显指 | Ra>70/80 | | | | |
| Efficiency光效 | 160LM/W±10% | | | | |
| Total Flux(lm)光通量 | 16000lm | 24000lm | 32000lm | 38400lm | 48000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | |
| Beam Angle发光角度 | T2/T3/T5 | | | | |
| IP Grade防护等级 | IP66 | | | | |

Distribution Curve Flux 配光曲线

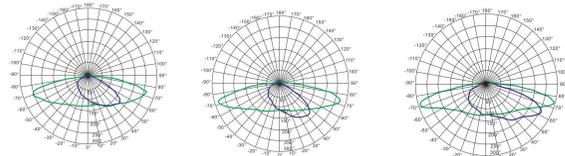

Application scenarios 应用场景



LDX (100W-300W)

鞋盒灯
专业美式照明

PARKING LIGHT

CE RoHS 5YEAR WARRANTY



Adopting high-power LED patch (3030&5050) light source, the power supply can be matched with any brand
采用大功率LED贴片 (3030&5050) 光源, 电源可匹配任何品牌

The top or side of the lamp post is connected, with a positive or negative 180 degree angle

灯杆顶部或侧面接入, 正负180度角

ADC12 die-casting, high thermal conductivity, fully guarantees the 50000 hour service life of LED shoe box lights

ADC12压铸, 高热导率, 充分保证了LED鞋盒灯50000小时的使用寿命

PC protective lens, highly corrosion-resistant and UV resistant, suitable for coastal areas

PC防护透镜, 高防腐蚀和抗紫外线, 适用于沿海地区



Lighting in public areas such as streets, parking lots, parks, courtyards, squares, roads, and buildings

街道、停车场、公园、庭院、广场、道路、建筑等公共区域照明

Product specs 产品参数

| Model 产品型号 | IL-LDX100 | IL-LDX150 | IL-LDX200 | IL-LDX240 | IL-LDX300 |
|-------------------|---------------------------------|------------|------------|------------|------------|
| Dimension尺寸(mm) | 543*317*75 | 543*317*75 | 663*317*75 | 663*317*75 | 785*317*84 |
| Power功率 | 100W | 150W | 200W | 240W | 300W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | |
| CRI显指 | Ra>70/80 | | | | |
| Efficiency光效 | 150LM/W±10% | | | | |
| Total Flux(lm)光通量 | 15000lm | 22500lm | 30000lm | 36000lm | 45000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | |
| Beam Angle发光角度 | T3/T4/T5 | | | | |
| IP Grade防护等级 | IP66 | | | | |

Distribution curve flux 配光曲线

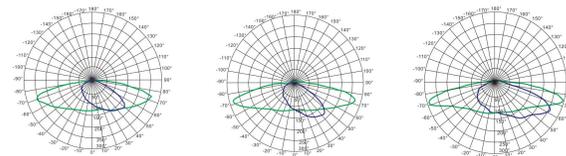

Application scenarios 应用场景



LDQ (50W-300W)

道路灯
专业市政照明

STREET LIGHT

CE RoHS 5YEAR
WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan

进口Lumileds光源, 高亮度、低光衰、寿命长

Multi angle adjustment of lighting fixtures, suitable for various lighting environments

灯具多角度调节, 适用于多种照明环境

Modular pluggable design, easy tool maintenance

模块化可拔插设计, 简易工具维护

Independent electrical chamber design, waterproof up to IP66

独立的电器腔体设计, 防水可达IP66


Widely applicable to any outdoor lighting place such as roads, squares, scenic spots, sports fields, parking lots, etc

广泛适用于道路、广场、景区、球场、停车场等户外任何照明场所

Product specs 产品参数

| Model 产品型号 | IL-LDQ50 | IL-LDQ100 | IL-LDQ150 | IL-LDQ200 | IL-LDQ250 | IL-LDQ300 |
|-------------------|---------------------------------|------------|------------|------------|------------|------------|
| Dimension尺寸(mm) | 439*330*75 | 522*330*75 | 605*330*75 | 688*330*75 | 771*330*75 | 854*330*75 |
| Power功率 | 50W | 100W | 150W | 200W | 250W | 300W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | | |
| CRI显指 | Ra>70/80 | | | | | |
| Efficiency光效 | 130-160LM/W±10% | | | | | |
| Total Flux(lm)光通量 | 6500lm | 13000lm | 19500lm | 26000lm | 32500lm | 39000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | | |
| Beam Angle发光角度 | 75°*150° | | | | | |
| IP Grade防护等级 | IP66 | | | | | |

Distribution Curve Flux 配光曲线



Application scenarios 应用场景



LDJ (50W-300W)

道路灯
专业市政照明

STREET LIGHT

CE RoHS 5YEAR
WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan

进口Lumileds光源, 高亮度、低光衰、寿命长

Efficient heat dissipation design, electrostatic spraying, strong corrosion resistance, durable and long-lasting,

高效散热结构, 静电喷涂, 抗腐蚀能力强, 持久耐用

Modular lens, easy maintenance and low cost

模块化透镜, 维护方便成本低

Modular and pluggable design, easy tool maintenance, convenient installation, disassembly, and replacement

模块化可拔插设计, 简易工具维护方便安装、拆卸、更换


Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc

高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDJ50 | IL-LDJ100 | IL-LDJ150 | IL-LDJ200 | IL-LDJ250 | IL-LDJ300 |
|-------------------|---------------------------------|-------------|-------------|-------------|-------------|-------------|
| Dimension尺寸(mm) | 440*330*100 | 520*330*100 | 600*330*100 | 680*330*100 | 770*330*100 | 850*330*100 |
| Power功率 | 50W | 100W | 150W | 200W | 250W | 300W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | | |
| CRI显指 | Ra>70/80 | | | | | |
| Efficiency光效 | 130-160LM/W±10% | | | | | |
| Total Flux(lm)光通量 | 6500lm | 13000lm | 19500lm | 26000lm | 32500lm | 39000lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | | |
| Beam Angle发光角度 | 75°*150° | | | | | |
| IP Grade防护等级 | IP66 | | | | | |

Distribution curve flux 配光曲线



Application scenarios 应用场景



LDS (50W-350W)

道路灯
专业市政照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
6063 aluminum profile stretch forming, high thermal conductivity, longer service life
6063铝型材拉伸成型, 高导热性能, 使用寿命更加长久
Optical PC lens, IK08 anti-collision grade, transmittance of 94%, professional optical light distribution: 70° * 140°
光学PC透镜, IK08防撞等级, 抗UV, 透光率94%, 专业光学配光: 70°*140°
Independent electrical chamber design, waterproof up to IP66
独立的电器腔体设计, 防水可达IP66
Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc
高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDS50 | IL-LDS100 | IL-LDS150 | IL-LDS200 | IL-LDS250 | IL-LDS230 | IL-LDS350 |
|-------------------|---------------------------------|------------|------------|------------|------------|------------|------------|
| Dimension尺寸(mm) | 376*300*85 | 454*300*85 | 532*300*85 | 610*300*85 | 688*300*85 | 766*300*85 | 844*300*85 |
| Power功率 | 50W | 100W | 150W | 200W | 250W | 300W | 350W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | | | |
| CRI显指 | Ra>70/80 | | | | | | |
| Efficiency光效 | 130LM/W±10% | | | | | | |
| Total Flux(lm)光通量 | 6500lm | 13000lm | 19500lm | 26000lm | 32500lm | 39000lm | 45500lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | | | |
| Beam Angle发光角度 | 75°*140° | | | | | | |
| IP Grade防护等级 | IP66 | | | | | | |

Distribution Curve Flux 配光曲线



Application scenarios 应用场景



LDZ (50W-350W)

道路灯
专业市政照明

STREET LIGHT

CE RoHS 5YEAR WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Efficient heat dissipation design, electrostatic spraying, strong corrosion resistance, durable and long-lasting,
高效散热结构, 静电喷涂, 抗腐蚀能力强, 持久耐用,
Buckle type installation, tool free disassembly
卡扣式安装, 免工具拆卸
Modular and pluggable design, easy tool maintenance, convenient installation, disassembly, and replacement
模组化可拔插设计, 简易工具维护方便安装、拆卸、更换
Outdoor lighting for highways, elevated roads, urban streets, overpasses, sidewalks, squares, schools, etc
高速公路, 高架路, 市区街道, 天桥, 人行道, 广场, 学校等户外照明

Product specs 产品参数

| Model 产品型号 | IL-LDZ50 | IL-LDZ100 | IL-LDZ150 | IL-LDZ200 | IL-LDZ250 | IL-LDZ300 | IL-LDZ350 |
|-------------------|---------------------------------|-------------|-------------|-------------|-------------|-------------|--------------|
| Dimension尺寸(mm) | 548*325*110 | 626*325*110 | 704*325*110 | 782*325*110 | 860*325*110 | 938*325*110 | 1015*325*110 |
| Power功率 | 50W | 100W | 150W | 200W | 250W | 300W | 350W |
| Voltage输入电压 | AC100-277V 50/60Hz | | | | | | |
| LED Brand 芯片品牌 | Lumileds | | | | | | |
| CRI显指 | Ra>70/80 | | | | | | |
| Efficiency光效 | 130LM/W±10% | | | | | | |
| Total Flux(lm)光通量 | 6500lm | 13000lm | 19500lm | 26000lm | 32500lm | 39000lm | 45500lm |
| CCT色温 | 3000K/4000K/5000K/5700K/6500K | | | | | | |
| LED Driver 驱动电源 | MEAN WELL / MOSO / Inventronics | | | | | | |
| Beam Angle发光角度 | 75°*140° | | | | | | |
| IP Grade防护等级 | IP66 | | | | | | |

Distribution curve flux 配光曲线



Application scenarios 应用场景

