

# T8 Waterproof Double Battens


T8防水雙支架

Series Type: IPBA-1240-M128ETI-M

## Features 產品特點 >>

- The lamp body design has the functions of dustproof, moisture-proof and waterproof
- Good toughness and strong impact resistance
- With high transmittance and even luminance
- With high thermal conductivity and good heat dissipation
- The lamp body and lampshade are made of polycarbonate (PC), with a locking design, which is easy to disassemble. PC or stainless steel buckles can be used.

- 燈體設計具有防塵, 防潮, 防水功能
- 韌性好, 抗衝擊性強
- 透光率高, 亮度均勻
- 導熱係數高, 散熱好
- 燈體及燈罩是採用聚碳酸料 (PC) 製造, 鎖扣式設計, 拆卸方便, 可選用PC或不鏽鋼搭扣



(Unit : mm)

## Specification 產品規格 >>

Model 型號	Size 尺寸 (mm)	Number Of Tube 燈管數量 (pcs)	Material 材料	IP Grade IP等級	Carton Size 外箱尺寸 (mm)	PCS / CTN 每箱數量
IPBA-1240-M128ETI-M	1265*125*95	2pcs*1.2m(2ft)	PC	IP 65	1285*140*100	4

- The product is a separate bracket, which can be equipped with LED tube as required
- Lamp light effect (lm/W), power (W), color rendering index (CRI), length, can be customized according to customer needs

- 產品為單獨支架, 可按需求配備LED燈管
- 燈管光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度, 可根據客戶需求定制

# Integrated Three Proof Lamp


一體化三防燈

Series Type: IPB-1236-PWM118

## Features 產品特點 >>

- The whole lamp body is made of high-quality pc, anti-falling, explosion-proof, high light transmission, toughness and not easy to yellow
- The two ends of the lamp are sealed with waterproof glue, and the outlet end adopts a screw knob, and the waterproof grade is Ip65
- Double row high lumen copper bracket lamp beads, soft light CRI 80
- Using constant current and wide voltage drive power, more stable light emission and longer life span

- 全燈體採用優質pc, 防摔防爆高透光, 韌性好不易發黃
- 燈兩端採用防水膠密封, 出線端採用螺絲旋鈕, 防水等級IP65
- 雙排高流明銅支架燈珠, 光線柔和顯指80
- 採用恒流寬壓驅動電源, 發光更穩定, 壽命更持久

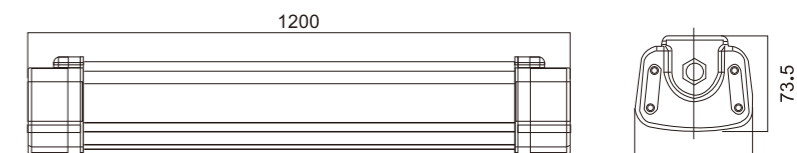

(Unit : mm)

## Specification 產品規格 >>

Model 型號	Voltage 電壓 (V)	Power 功率 (W)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Color Temperature 色溫 (K)	Life Time 壽命 (H)	Beam Angle 光束角 (°)	Operating Temperature 工作溫度 (°C)	IP Grade IP等級	Size 尺寸 (mm)
IPB-1236-PWM118	85~265	36	110	>80	2700-6500	50000	120	-20~45	IP 65	1200*74*60

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Size Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%. According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度, 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意