

LED Flood Light

Model : FL-A100-I118E

Features:


- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A100-I118E

Standard

Standard Size(mm)	366*183*75mm
Voltage (V)	AC85~265V
Beam Angle	90 degree
CRI	>80Ra
Luminous Efficacy	110 lm/w
Power Factor	> 0.90
Power (W)	100W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 67

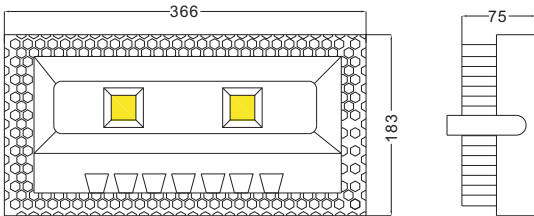

LED Flood Light

Model : FL-A100-I118B

Features:


- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A100-I118B

Standard

Standard Size(mm)	366*183*75mm
Voltage (V)	AC85~265V
Beam Angle	90 degree
CRI	>80Ra
Luminous Efficacy	110 lm/w
Power Factor	> 0.90
Power (W)	100W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 67

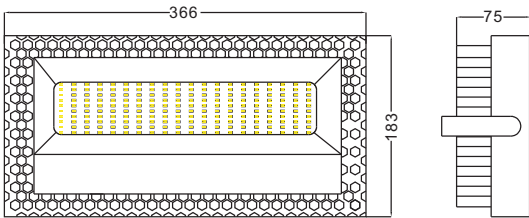

LED Flood Light


Model : FL-A35-C128B

Features:

- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A35-I128B

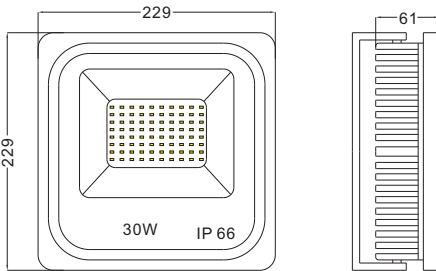

Standard

Standard Size(mm)	229*229*61mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	120 lm/w
Power Factor	> 0.90
Power (W)	35W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 66

500W RGB LED Projection Lamp



Model : FL-P500W-S1-RGB-D512

Features:

- 1.High Lumen America CREE Chip
- 2.RGB Multiple color for different environment lighting.
3. Waterproof Driver, Passed CE ROHS EMC
- 4.The thickest Shell , good Heatsink
- 5.Easy to install and remove





Model :FL-P500W-S1-RGB-D512



DMX512 Encoder

Standard

Standard Size(mm)	Ø479.3*320*390.7mm
Voltage (V)	AC85~265V(50-60 Hz)
Beam Angle	5 degree
CRI	>80Ra
Luminous Efficacy	80 lm/w
Color	RGB
Power Factor	> 0.90
Power (W)	500W/RGB
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Control interface	DMX512
IP Grade	IP67
Life Time	50,000(H)

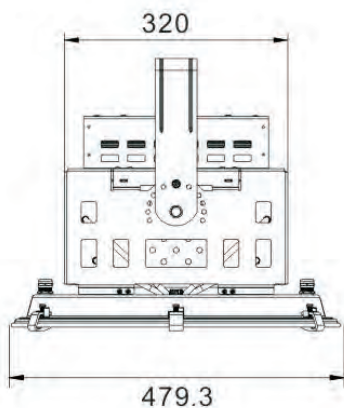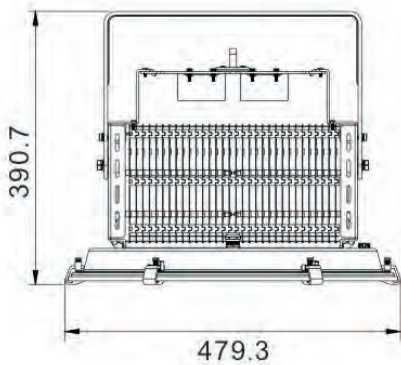

LED Flood Light



Model : FL-A20-H128E

Features:

- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A20-H128E



Standard

Standard Size(mm)	237*200*100mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	120 lm/w
Power Factor	> 0.90
Power (W)	20W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 67

LED Flood Light



Model : FL-A30-H108E

Features:

- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A30-H108E



Standard

Standard Size(mm)	237*200*100mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	30W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 67

LED Flood Light


Model : FL-A50-H108E

Features:

- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A50-H108E

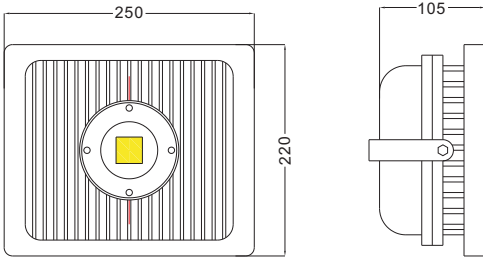

Standard

Standard Size(mm)	250*220*105mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	50W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 67

LED Flood Light


Model : FL-A50-H118E

Features:

- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A50-H118E

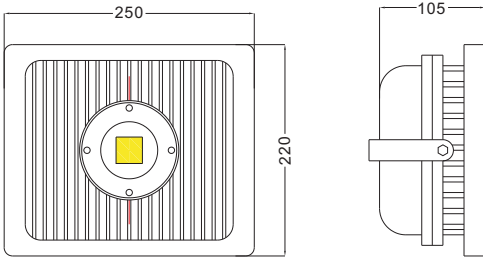

Standard

Standard Size(mm)	250*220*105mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	110 lm/w
Power Factor	> 0.90
Power (W)	50W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

LED Flood Light

Model : FL-A100-H118E

Features:



- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A100-H118E

Standard

Standard Size(mm)	450*310*200mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	110 lm/w
Power Factor	> 0.90
Power (W)	100W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

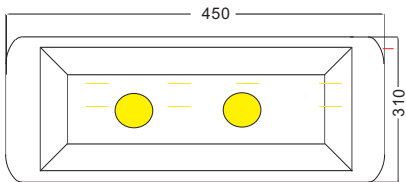

LED Flood Light

Model: FL-A150-H128E

Features


1. High power LED chips
2. Ideal for indoor and outdoor lighting
3. Voltage range: AC85~265V, CE ROHS EMC
4. Compact size
5. Easy to install



Model : FL-A150-H128E

Standard

Standard Size(mm)	430*310*200mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	120 lm/w
Power Factor	> 0.90
Power (W)	150W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

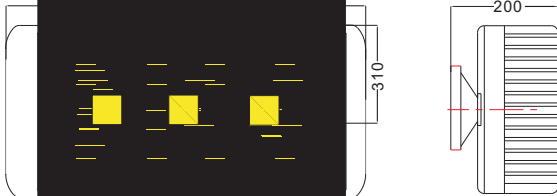

LED Flood Light


Model : FL-A200-H108E

Features:

- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A200-H108E

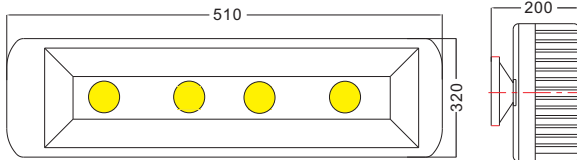

Standard

Standard Size(mm)	510*320*200mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	200W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

LED Flood Light

Model : FL-A250-H108E

Features:


- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A250-H108E

Standard

Standard Size(mm)	650*320*200mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	250W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

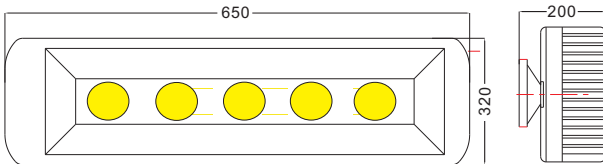

LED Flood Light


Model : FL-A300-H108E

Features:

- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A300-H108E

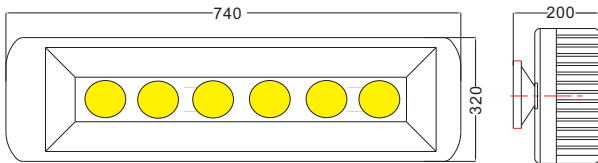

Standard

Standard Size(mm)	740*320*200mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	300W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

LED Flood Light


Model : FL-A100-K108E

Features:

- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove



Model : FL-A100-K108E

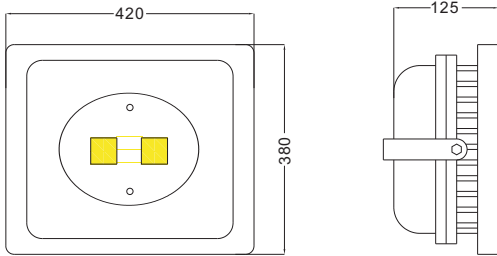

Standard

Standard Size(mm)	420*380*125mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	100W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

LED Flood Light

Model: FL-A150-L108E

Features


1. High power LED chips
2. Ideal for indoor and outdoor lighting
3. Voltage range: AC85~265V, CE ROHS EMC
4. Compact size
5. Easy to install



Model : FL-A150-L108E

Standard

Standard Size(mm)	430*310*200mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	150W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

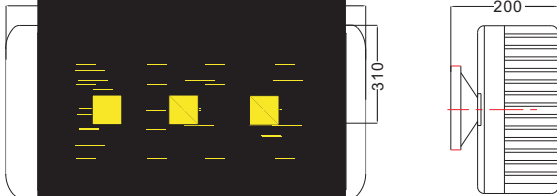


LED Flood Light



Model : FL-A280-L108E

Features:


- 1.High Lumen Chip
- 2.It can be used for indoor and outdoor lighting
- 3.Waterproof Driver, Passed CE ROHS EMC
- 4.Good Heatsink
- 5.Easy to install and remove

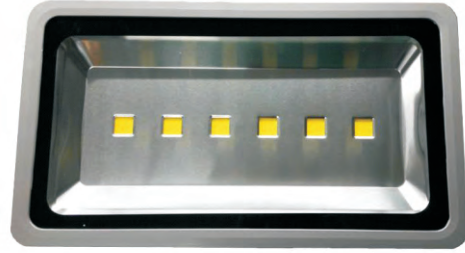

Model : FL-A280-L108E

Standard

Standard Size(mm)	590*335*200mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	280W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

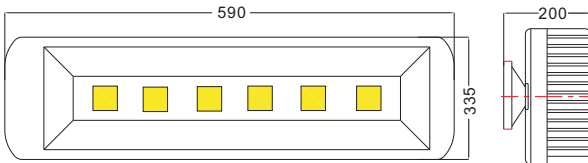

Model: FL-A400-L108E

Features

- 1. High brightness
- 2. Ideal for outdoor lighting
- 3. Voltage range: AC85V~265V, CE ROHS EMC
- 4. Compact size
- 5. Easy installation



Model : FL-A400-L108E

Standard

Standard Size(mm)	525*325*190mm
Voltage (V)	AC85~265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	400W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

