

HBD (60W-250W)

工矿灯
专业工业照明

HIGH BAY LIGHT

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
 进口Lumileds光源, 高亮度、低光衰、寿命长
 Stretch aluminum+pure copper high thermal conductivity process, professional structural design, stable performance
 拉伸铝+纯铜高导热工艺, 弧形散热结构, 性能更加出色稳定
 Milk white anti glare PC cover, high transparency transparent PC cover, optional
 奶白防眩PC罩, 高透光透明PC罩可选
 Compatible with various installation methods such as lifting, U-shaped brackets, hooks, and suspension rods
 兼容吊装、U型支架、挂钩、吊杆等多种安装方式
 High altitude lighting for steel structure factories, logistics centers, exhibition halls, sports halls, toll stations, etc
 钢结构厂房、物流中心、展览馆、体育馆、收费站、车站机场等高空照明场所

Product specs 产品参数

Model 产品型号	IL-HBD60	IL-HBD100	IL-HBD150	IL-HBD200	IL-HBD250
Dimension尺寸(mm)	Φ350*H252	Φ350*H272	Φ350*H302	Φ350*H352	Φ350*H402
Power功率	60W	100W	150	200W	250W
Voltage输入电压	AC100-277V 50/60Hz				
LED Brand 芯片品牌	Lumileds				
CRI显指	Ra>70/80				
Efficiency光效	130LM/W±10%				
Total Flux(lm)光通量	7800lm	13000lm	19500lm	26000lm	32500lm
CCT色温	3000K/4000K/5000K/5700K/6500K				
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics				
Beam Angle发光角度	45°/60°/90°/120°				
IP Grade防护等级	IP54				

Optical pattern diagram 光型图

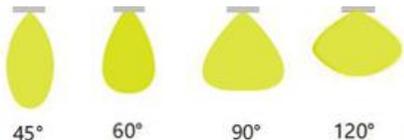

Application scenarios 应用场景



HBF (60W-400W)

工矿灯
专业工业照明

HIGH BAY LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
 进口Lumileds光源, 高亮度、低光衰、寿命长
 All aluminum alloy+pure copper thermal conductivity, 3D three-dimensional heat dissipation, stable performance
 拉伸铝+纯铜高导热工艺, 3D立体散热结构, 性能稳定更耐用
 Surface anode/electrophoresis treatment, strong corrosion resistance
 表面阳极/电泳处理, 耐腐蚀性强
 Series design, multiple installation methods such as lifting, convenient hook type, and suspension rod
 系列化设计, 吊装、便捷挂钩式、吊杆等多种安装方式
 High altitude lighting for steel structure factories, logistics centers, exhibition halls, sports halls, toll stations, etc
 钢结构厂房、物流中心、展览馆、体育馆、收费站、车站机场等高空照明场所

Product specs 产品参数

Model 产品型号	IL-HBF60	IL-HBF120	IL-HBF150	IL-HBF200	IL-HBF250	IL-HBF300	IL-HBF400
Dimension尺寸(mm)	Φ435*H372	Φ435*H410	Φ435*H450	Φ435*H468	Φ435*H445	Φ435*H485	Φ435*H545
Power功率	60W/80W	100W/120W	150W	200W	250W	300W	400W
Voltage输入电压	AC100-277V 50/60Hz						
LED Brand 芯片品牌	Lumileds						
CRI显指	Ra>70/80						
Efficiency光效	130LM/W±10%						
Total Flux(lm)光通量	7800/10400lm	12000/15600lm	19500lm	26000lm	32500lm	39000lm	52000lm
CCT色温	3000K/4000K/5000K/5700K/6500K						
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics						
Beam Angle角度	45°/60°/90°/120°(默认)						
IP Grade防护等级	IP54						

Optical pattern diagram 光型图

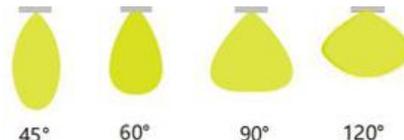

Application scenarios 应用场景



HBJ (100W-500W)

工矿灯
专业工业照明

STADIUM LIGHT




Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
ADC12 aluminum alloy lamp body, surface powder coating treatment, corrosion-resistant
ADC12压铸铝壳体, 表面喷粉处理, 耐腐蚀
Optical PC lens, IK08 anti-collision rating, UV resistance, 94% transmittance, professional optics optional
光学PC透镜, IK08防撞等级, 抗UV, 透光率94%, 专业光学配光: 60°、90°、120°
Serialized product design, supporting hoisting, polemounting and bracket mounting
系列化产品设计, 支持吊装, 杆装, 支架安装方式
High altitude lighting for steel structure factories, logistics centers, exhibition halls, sports halls, toll stations, etc
钢结构厂房、物流中心、展览馆、体育馆、收费站、车站机场等高空照明场所

Product specs 产品参数

Model 产品型号	IL-HBJ100	IL-HBJ150	IL-HBJ200	IL-HBJ240	IL-HBJ300	IL-HBJ500
Dimension尺寸(mm)	235*162	255*162	300*177	365*177	385*193	490*241
Power功率	100W	150W	200W	240W	300W	500W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	150LM/W±10%					
Total Flux(lm)光通量	15000lm	22500lm	30000lm	36000lm	45000lm	75000lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle发光角度	60°/90°/120°					
IP Grade防护等级	IP65					

Optical pattern diagram 光型图



Application scenarios 应用场景



HBR (300W-600W)

工矿灯
专业工业照明

STADIUM LIGHT




Specially designed for high-temperature working environments, with separate power supply and lamp body
专为高空照明场所而设计, 采用电源与灯体分离, 最大程度保护产品寿命
Integrated die casting design, high thermal conductivity AD12 aluminum material
一体式整体压铸设计, 高导热AD12铝材质
Surface anode/electrophoresis treatment, strong corrosion resistance
透镜+玻璃光学设计, 可选:30°、60°、90°、120°、T2/T3/T4
Serialized product design, supporting hoisting, polemounting and bracket mounting
系列化产品设计, 支持吊装, 杆装, 支架安装方式
High altitude lighting for steel structure factories, logistics centers, exhibition halls, sports halls, toll stations, etc
钢结构厂房、物流中心、展览馆、体育馆、收费站、车站机场等高空照明场所

Product specs 产品参数

Model 产品型号	IL-HBR300	IL-HBR400	IL-HBR500	IL-HBR600
Dimension尺寸(mm)	Φ400*H205	Φ420*H245	Φ480*H258	Φ480*H258
Power功率	300W	400W	500W	600W
Voltage输入电压	AC100-277V 50/60Hz			
LED Brand 芯片品牌	Lumileds			
CRI显指	Ra>70/80/90			
Efficiency光效	150LM/W±10%			
Total Flux(lm)光通量	45000lm	60000lm	75000lm	90000lm
CCT色温	3000K/4000K/5000K/5700K/6500K			
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics			
Beam Angle发光角度	15°/30°/60°/90°/偏光45°/T2/T3/T4			
IP Grade防护等级	IP65			

Optical pattern diagram 光型图

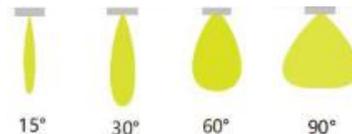

Application scenarios 应用场景



HBH (100W-300W)

工矿灯
专业工业照明

HIGH BAY LIGHT

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
 进口Lumileds光源, 高亮度、低光衰、寿命长
 Die cast aluminum heat dissipation shell, convection through upper and lower ventilation openings, fast heat dissipation
 压铸铝散热壳体, 上下通风口对流, 快速散热
 Optical PC lens, IK08, UV resistant, with a transmittance of 94%, professional optical light distribution: 60°, 90°, 120°
 光学PC透镜, IK08防撞等级, 抗UV, 透光率94%, 专业光学配光: 60°、90°、120°
 Serialized product design, supporting hoisting, polemounting and bracket mounting
 系列化产品设计, 支持吊装, 杆装, 支架安装方式
 Lighting for warehouses, workshops, supermarkets, underground parking lots, logistics centers, indoor sports halls, etc
 仓库, 车间, 超市, 地下停车场, 物流中心, 室内体育馆等照明场所

Product specs 产品参数

Model 产品型号	IL-HBH100	IL-HBH150	IL-HBH200	IL-HBH240	IL-HBH300
Dimension尺寸(mm)	Φ250*174	Φ290*174	Φ330*174	Φ360*175	Φ360*175
Power功率	100W	150W	200W	240W	300W
Voltage输入电压	AC100-277V 50/60Hz				
LED Brand 芯片品牌	Lumileds				
CRI显指	Ra>70/80				
Efficiency光效	150LM/W±10%				
Total Flux(lm)光通量	15000lm	22500lm	30000lm	36000lm	45000lm
CCT色温	3000K/4000K/5000K/5700K/6500K				
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics				
Beam Angle发光角度	60°/90°/120°				
IP Grade防护等级	IP65				

Optical pattern diagram 光型图



Application scenarios 应用场景



HBF (100W-240W)

工矿灯
专业工业照明

HIGH BAY LIGHT

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
 进口Lumileds光源, 高亮度、低光衰、寿命长
 Integrated die casting design, high thermal conductivity AD12 aluminum material
 一体式整体压铸设计, 高导热AD12铝材质
 Optical PC lens, IK08 anti-collision rating, UV resistance, 94% transmittance, 90 degree emission angle
 光学PC透镜, IK08防撞等级, 抗UV, 透光率94%, 90度发光角度
 Serialized product design, supporting hoisting, polemounting and bracket mounting
 系列化产品设计, 支持吊装, 杆装, 支架安装方式
 Lighting for warehouses, workshops, supermarkets, underground parking lots, logistics centers, indoor sports halls, etc
 仓库, 车间, 超市, 地下停车场, 物流中心, 室内体育馆等照明场所

Product specs 产品参数

Model 产品型号	IL-HBF100	IL-HBF120	IL-HBF150	IL-HBF180	IL-HBF200	IL-HBF240
Dimension尺寸(mm)	Φ380*96	Φ380*96	Φ420*105	Φ420*105	Φ450*107	Φ450*107
Power功率	100W	120W	150W	180W	200W	240W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	130LM/W±10%					
Total Flux(lm)光通量	13000lm	15600lm	19500lm	23400lm	26000lm	31200lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle发光角度	90°					
IP Grade防护等级	IP65					

Optical pattern diagram 光型图



Application scenarios 应用场景



HBA (100W-350W)

工矿灯
专业工业照明

HIGH BAY LIGHT

CE RoHS 5YEAR WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan

进口Lumileds光源, 高亮度、低光衰、寿命长

Die cast aluminum heat dissipation shell, convection through upper and lower ventilation openings, fast heat dissipation

压铸铝散热壳体, 上下通风口对流, 快速散热

Optical PC lens, IK08, UV resistant, with a transmittance of 94%, professional optical light distribution: 60°, 90°, 120°

光学PC透镜, IK08防撞等级, 抗UV, 透光率94%, 专业光学配光: 60°、90°、120°

Serialized product design, supporting hoisting, polemounting and bracket mounting

系列化产品设计, 支持吊装, 杆装, 支架安装方式

Lighting for warehouses, workshops, supermarkets, underground parking lots, logistics centers, indoor sports halls, etc
仓库, 车间, 超市, 地下停车场, 物流中心, 室内体育馆等照明场所


Product specs 产品参数

Model 产品型号	IL-HBA100	IL-HBA150	IL-HBA200	IL-HBA250	IL-HBA300	IL-HBA350
Dimension尺寸(mm)	Φ280*175.5	Φ340*179.5	Φ400*189	Φ400*205	Φ400*213	Φ400*213
Power功率	100W	150W	200W	240W	300W	350W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	120-140LM/W±10%					
Total Flux(lm)光通量	14000lm	21000lm	28000lm	33600lm	56000lm	49000lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle发光角度	60°/90°/120°					
IP Grade防护等级	IP65					

Optical pattern diagram 光型图



60° 90° 120°



Application scenarios 应用场景



HBG (100W-300W)

工矿灯
专业工业照明

HIGH BAY LIGHT

CE RoHS 5YEAR WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan

进口Lumileds光源, 高亮度、低光衰、寿命长

Die cast aluminum heat dissipation shell, convection through upper and lower ventilation openings, fast heat dissipation

压铸铝散热壳体, 上下通风口对流, 快速散热

Optical PC lens, IK08, UV resistant, with a transmittance of 94%, professional optical light distribution: 60°, 90°, 120°

光学PC透镜, IK08防撞等级, 抗UV, 透光率94%, 专业光学配光: 60°、90°、120°

Serialized product design, supporting hoisting, polemounting and bracket mounting

系列化产品设计, 支持吊装, 杆装, 支架安装方式

Lighting for warehouses, workshops, supermarkets, underground parking lots, logistics centers, indoor sports halls, etc
仓库, 车间, 超市, 地下停车场, 物流中心, 室内体育馆等照明场所


Product specs 产品参数

Model 产品型号	IL-HBG100	IL-HBG150	IL-HBG200	IL-HBG250	IL-HBG300
Dimension尺寸(mm)	Φ280*164	Φ340*167	Φ401*167	Φ401*172	Φ440*182
Power功率	100W	150W	200W	240W	300W
Voltage输入电压	AC100-277V 50/60Hz				
LED Brand 芯片品牌	Lumileds				
CRI显指	Ra>70/80				
Efficiency光效	120-140LM/W±10%				
Total Flux(lm)光通量	14000lm	21000lm	28000lm	33600lm	56000lm
CCT色温	3000K/4000K/5000K/5700K/6500K				
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics				
Beam Angle发光角度	60°/90°/120°				
IP Grade防护等级	IP65				

Optical pattern diagram 光型图



60° 90° 120°



Application scenarios 应用场景



HBV (100W-240W)

工矿灯
专业工业照明

HIGH BAY LIGHT

CE RoHS 5YEAR WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan

进口Lumileds光源, 高亮度、低光衰、寿命长

Integrated die casting design, high thermal conductivity AD12 aluminum material

一体式整体压铸设计, 高导热AD12铝材质

Optical PC lens, IK08 anti-collision rating, UV resistance, 94% transmittance, 120 degree emission angle

光学PC透镜, IK08防撞等级, 抗UV, 透光率94%, 120度发光角度

Serialized product design, supporting hoisting, polemounting and bracket mounting

系列化产品设计, 支持吊装, 杆装, 支架安装方式

Lighting for warehouses, workshops, supermarkets, underground parking lots, logistics centers, indoor sports halls, etc
仓库, 车间, 超市, 地下停车场, 物流中心, 室内体育馆等照明场所


Product specs 产品参数

Model 产品型号	IL-HBV100	IL-HBV150	IL-HBV200	IL-HBV240
Dimension尺寸(mm)	Φ280*180	Φ320*185	Φ360*198	Φ360*198
Power功率	100W	150W	200W	240W
Voltage输入电压	AC100-277V 50/60Hz			
LED Brand 芯片品牌	Lumileds			
CRI显指	Ra> 70/80			
Efficiency光效	130LM/W±10%			
Total Flux(lm)光通量	13000lm	19500lm	26000lm	31200lm
CCT色温	4000K/5000K/5700K/6500K			
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics			
Beam Angle发光角度	120°			
IP Grade防护等级	IP65			

Optical pattern diagram 光型图



120°



Application scenarios 应用场景



HBU (100W-240W)

工矿灯
专业工业照明

HIGH BAY LIGHT

CE RoHS 5YEAR WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan

进口Lumileds光源, 高亮度、低光衰、寿命长

Integrated die casting design, high thermal conductivity AD12 aluminum material

一体式整体压铸设计, 高导热AD12铝材质

Lens+tempered glass optional, IK08 anti-collision rating, UV resistance, 94% light transmittance

光学PC透镜+钢化玻璃可选, IK08防撞等级, 抗UV, 透光率94%

Serialized product design, supporting hoisting, polemounting and bracket mounting

系列化产品设计, 支持吊装, 杆装, 支架安装方式

Lighting for warehouses, workshops, supermarkets, underground parking lots, logistics centers, indoor sports halls, etc
仓库, 车间, 超市, 地下停车场, 物流中心, 室内体育馆等照明场所

Product specs 产品参数

Model 产品型号	IL-HBU100	IL-HBU150	IL-HBU200	IL-HBU240
Dimension尺寸(mm)	Φ250*178	Φ300*181	Φ345*183	Φ345*195
Power功率	100W	150W	200W	240W
Voltage输入电压	AC100-277V 50/60Hz			
LED Brand 芯片品牌	Lumileds			
CRI显指	Ra> 70/80			
Efficiency光效	130-140LM/W±10%			
Total Flux(lm)光通量	13000lm	19500lm	26000lm	31200lm
CCT色温	3000K/4000K/5000K/5700K/6500K			
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics			
Beam Angle发光角度	60°/90°/120°			
IP Grade防护等级	IP65			

Optical pattern diagram 光型图



60°

90°

120°



Application scenarios 应用场景

