

**CATALOG**  
LED Lighting Series  
**4. Panel Light**

Green | Low Carbon | Energy Saving



EASTLIKE LED COMPANY

[www.eastlike.com](http://www.eastlike.com)



製造和營銷綠色低碳節能照明產品  
Manufacturing And Marketing Green Low Carbon  
And Energy Saving Lighting Products


## EASTLIKE LED COMPANY 東 欖 照 明 公 司

EASTLIKE LED Co., Ltd • emerges as a lighting designer manufacturer and supplier established in Hong Kong and Mainland China .  
The company devotes herself in the development, manufacturing and marketing of green, low-carbon and energy-saving lighting products. we are proud to provide a wide range of LED products


東欖LED照明公司•您的照明設計師。  
我們作為製造商和供應服務於香港和中國大陸。公司致力於開發，製造和行銷綠色，  
低碳和節能照明產品。  
我們竭誠為您服務，為您提供種類繁多的LED產品。

# 目录


# Content




P.01  
LED面板燈

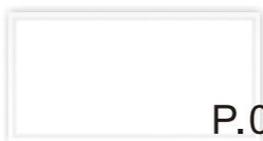

P.02  
LED面板燈



P.03  
面板燈

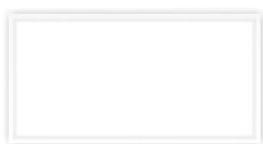

P.04  
面板燈



P.05  
集成側發光吊頂面板燈



P.06  
集成側發光吊頂面板燈



P.07  
側發光吊頂面板燈




P.08  
側發光吊頂面板燈



P.09  
嵌入式電動三色面板燈

## LED Panel Light

Series Type: EPLPN11

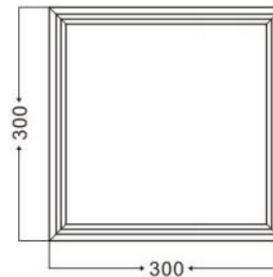

(Unit : mm)

## Features 產品特點

- ★ New direct light emitting technology, no video flash design
- ★ The new lens does not turn yellow
- ★ Long service life and lasting brightness
- ★ Specially designed for ceiling, suitable for all kinds of commercial lighting
- ★ Ceiling installation (equipped with hardware hook and triangle)

- ★ 新型直發光技術，無可視頻閃設計
- ★ 新型透鏡不發黃
- ★ 壽命長，亮度持久
- ★ 專為吊頂設計，適合各種商業照明
- ★ 吊頂安裝(配五金掛鉤三角掛)

## Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EPL-PN3030-T	100-240	20	100/120/160	>80	3000/4000/6500	30,000	180	-20~45	300*300*35

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems, (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

## LED Panel Light

Series Type: EPLPN12

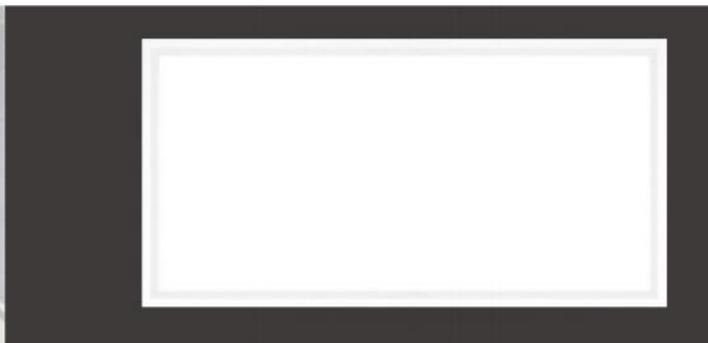

(Unit : mm)

## Features 產品特點

- ★ New direct light emitting technology, no video flash design
- ★ The new lens does not turn yellow
- ★ Long service life and lasting brightness
- ★ Specially designed for ceiling, suitable for all kinds of commercial lighting
- ★ Ceiling installation (equipped with hardware hook and triangle)

- ★ 新型直發光技術，無可視頻閃設計
- ★ 新型透鏡 不發黃
- ★ 壽命長，亮度持久
- ★ 專為吊頂設計，適合各種商業照明
- ★ 吊頂安裝(配五金掛鉤三角掛)

## Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EPL-PN3060-T	100-240	40	100/120/160	>80	3000/4000/6500	30,000	180	-20~45	300*600*35

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

## Panel Light

Series Type: EPLPN22

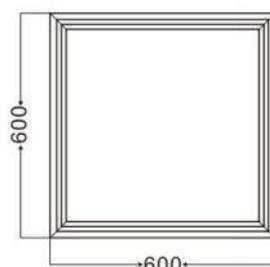

(Unit : mm)

## Features 產品特點

- ★ New direct light emitting technology, no video flash design
- ★ The new lens does not turn yellow
- ★ Long service life and lasting brightness
- ★ Specially designed for ceiling, suitable for all kinds of commercial lighting
- ★ Ceiling installation (equipped with hardware hook and triangle)

- ★ 新型直發光技術，無可視頻閃設計
- ★ 新型透鏡不發黃
- ★ 壽命長，亮度持久
- ★ 專為吊頂設計，適合各種商業照明
- ★ 吊頂安裝(配五金掛鉤三角掛)

## Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EPL-PN6060-T	100-240	32	100/120/180	>80	3000/4000/6500	30,000	180	-20~45	600*600*35

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

## Panel Light

Series Type: EPLPN24

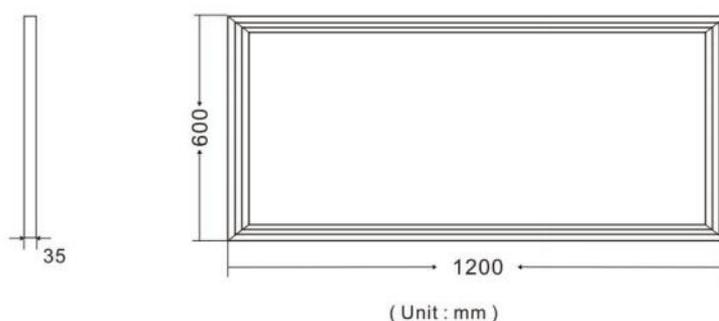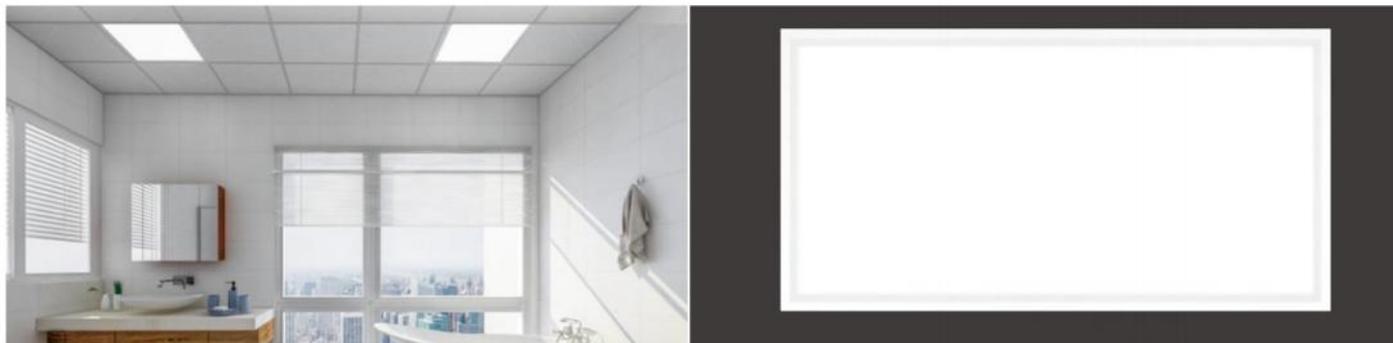

## Features 產品特點

- ★ New direct light emitting technology, no video flash design
  - ★ The new lens does not turn yellow
  - ★ Long service life and lasting brightness
  - ★ Specially designed for ceiling, suitable for all kinds of commercial lighting
  - ★ Ceiling installation (equipped with hardware hook and triangle)
- ★ 新型直發光技術，無可視頻閃設計
  - ★ 新型透鏡 不發黃
  - ★ 壽命長，亮度持久
  - ★ 專為吊頂設計，適合各種商業照明
  - ★ 吊頂安裝(配五金掛鉤三角掛)

## Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EPL-PN60120-T	100-240	70	100/120/180	>80	3000/4000/6500	30,000	180	-20~45	600*1200*35

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

## LED Integrated Side Luminous Ceiling Panel Lamp

Series Type: EPLAP11

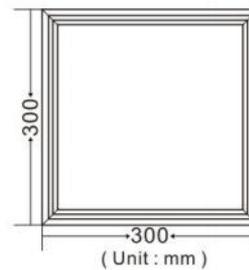

## Features 產品特點

- ★ Oxidation heat dissipation aluminum material is corrosion-resistant and durable
- ★ The light is soft and does not hurt the eyes
- ★ Metal shell waterproof power supply and efficient heat dissipation
- ★ Ceiling installation (equipped with hardware hook and triangle)
- ★ 氧化散熱鋁材抗腐蝕耐用
- ★ 光線柔和不傷眼
- ★ 金屬外殼防水電源 高效散熱
- ★ 吊頂安裝(配五金掛鉤三角掛)

## Specification 產品規格

Model 型號	Voltage 電壓 (V)	Power 功率 (W)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Colour Temp 色溫 (K)	Life Time 壽命 (H)	Beam Angle 光束角 (°)	Working temperature 工作溫度 (°C)	Size 尺寸 (mm)
EPL-PN3030-N88A4	100-240	12	80	>80	4000	30,000	180	-20~45	300*300*10
EPL-PN3030-N88A6	100-240	12	80	>80	6000	30,000	180	-20~45	300*300*10

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

## LED Integrated Side Luminous Ceiling Panel Lamp

Series Type: EPLAP12

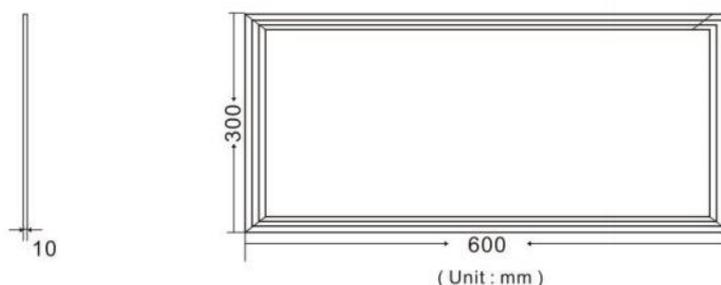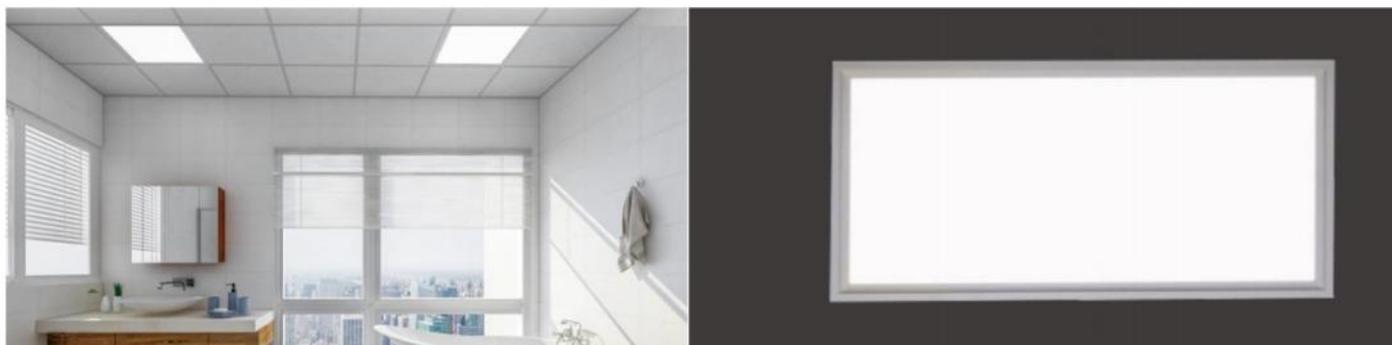

## Features 產品特點

- ★ Oxidation heat dissipation aluminum material is corrosion-resistant and durable
- ★ The light is soft and does not hurt the eyes
- ★ Metal shell waterproof power supply and efficient heat dissipation
- ★ Ceiling installation (equipped with hardware hook and triangle)
- ★ 氧化散熱鋁材抗腐蝕耐用
- ★ 光線柔和不傷眼
- ★ 金屬外殼防水電源 高效散熱
- ★ 吊頂安裝(配五金掛鉤三角掛)

## Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EPL-PN3060-N88A4	100-240	24	80	>80	4000	30,000	180	-20~45	300*600*10
EPL-PN3060-N88A6	100-240	24	80	>80	6000	30,000	180	-20~45	300*600*10

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality



光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意。

# Side Light Ceiling Panel Lamp

Series Type: EPLAP22

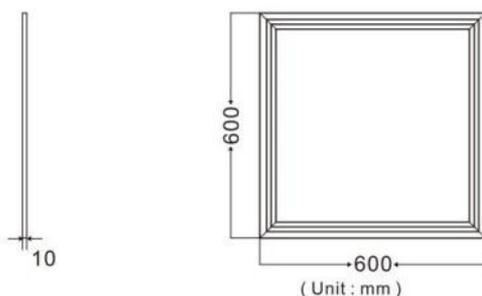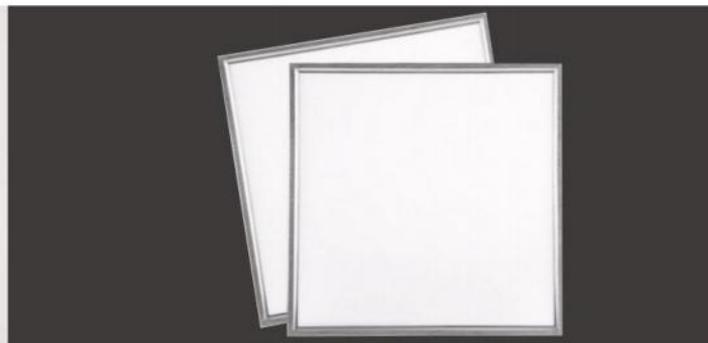

## Features 產品特點

- ★ Oxidation heat dissipation aluminum material is corrosion-resistant and durable
- ★ The light is soft and does not hurt the eyes
- ★ Metal shell waterproof power supply and efficient heat dissipation
- ★ Ceiling installation (equipped with hardware hook and triangle)
- ★ 氧化散熱鋁材抗腐蝕耐用
- ★ 光線柔和不傷眼
- ★ 金屬外殼防水電源 高效散熱
- ★ 吊頂安裝(配五金掛鉤三角掛)

## Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EPL-PN6060-N	100-240	36	100	>80	4000	30,000	180	-20~45	600*600*10

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

## Side Light Ceiling Panel Lamp

Series Type: EPLAP24

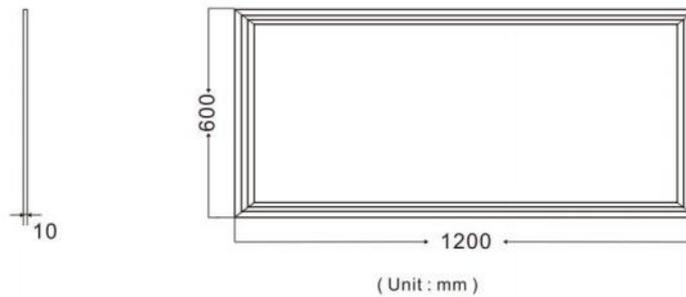

## Features 產品特點

- ★ Oxidation heat dissipation aluminum material is corrosion-resistant and durable
- ★ The light is soft and does not hurt the eyes
- ★ Metal shell waterproof power supply and efficient heat dissipation
- ★ Ceiling installation (equipped with hardware hook and triangle)
- ★ 氧化散熱鋁材抗腐蝕耐用
- ★ 光線柔和不傷眼
- ★ 金屬外殼防水電源 高效散熱
- ★ 吊頂安裝(配五金掛鉤三角掛)

## Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
EPL-PN60120-N	100-240	72	100	>80	6000	30,000	180	-20~45	600*1200*10

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

# Recessed motorized tri-color panel light

Series Type: PL-R-TPC

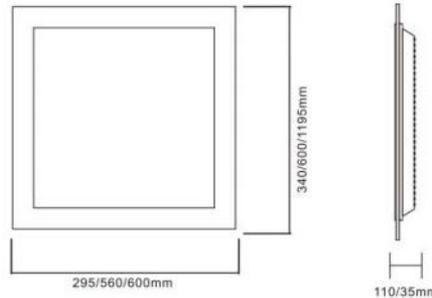

## Features 產品特點

- ★ Electric angle adjustment (0-60 degrees)
- ★ DMX512 dimming
- ★ Brightness is not dazzling, the light is uniform and soft, and the clarity is high.
- ★ Durable and sturdy, oxidation-resistant, the body is made of cast aluminum, lightweight and portable, with strong oxidation resistance and rapid heat dissipation.
- ★ Improved heat dissipation performance and quieter operation.

- ★ 電動角度調整 (0-60度)
- ★ DMX512調光
- ★ 亮度不刺眼，光線均勻柔和，清晰度高。
- ★ 耐用且堅固，抗氧化，機身由鑄鋁製成，輕巧便攜，具有強大的抗氧化能力及快速散熱功能。
- ★ 改善了散熱性能且運作更安靜。

## Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Size 尺寸
	(V)	(W)	(CRI)	(K)	(H)	(°)	(mm)
PL-R5030-TPC-D	90-260	200	>90	3200	20,000	0-60	560*340*110
PL-R5030-TPC-D	90-260	200	>90	3200-6500	20,000	0-60	560*340*110
PL-R5030-TPC-D	90-260	200	>90	6500	20,000	0-60	560*340*110
PL-R6060-TPC	90-260	200	>90	3200	20,000	0-60	600*600*110
PL-R6060-TPC	90-260	200	>90	3200-6500	20,000	0-60	595*595*35
PL-R30120-TPC	90-260	200	>90	6500	20,000	0-60	295*1195*35

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

東 櫳 照 明 公 司  
EASTLIKE LED COMPANY

---



**Office Address:** Room B3, 18/F Bonsun Industrial Building,  
364-366 Sha Tsui Road, Tsuen Wan, HongKong

**Phone:** 852-3107 7500

**Fax:** 852-3544 0462

**Whatsapp:** 852-5977 2627

**Email:** [info@eastlike.com](mailto:info@eastlike.com)