

T8 Single Waterproof Battens


T8單隻防水支架

Series Type: IPB-P-N65-S

Features 產品特點 >>

- Waterproof rating: IP65; certification standard: CE ROHS
- With waterproof, dust-proof, insect-proof and moisture-proof functions
- Suitable for T8 and T5 fluorescent tubes, LED tubes
- Made with the best PC materials, not easy to break, durable
- Various materials: PC, PS, ABS optional

- 防水等級:IP65;認證標準:CE ROHS
- 具有防水、防塵、防蟲、防潮功能
- 適合T8和T5螢光燈管,LED燈管
- 採用優質PC材料製作,不易破裂,耐用
- 多種材料:PC、PS、ABS可選

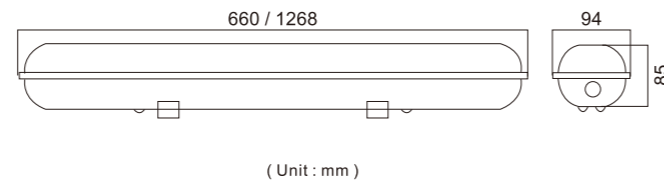

Specification 產品規格 >>

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Color Temperature 色溫	Life Time 壽命	Beam Angle 光束角	Operating Temperature 工作溫度	IP Grade IP等級	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)		(mm)
IPB-P0609-N65-S	85~265	1*9	100	>80	2700-6500	50000	120	-20~45	IP 65	660*85*94
IPB-P1218-N65-S	85~265	1*18	100	>80	2700-6500	50000	120	-20~45	IP 65	1268*85*94

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Size Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度, 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意

T8 Double Waterproof Battens


T8雙支防水支架

Series Type: IPB-P-N65-D

Features 產品特點 >>

- Waterproof rating: IP65; certification standard: CE ROHS
- With waterproof, dust-proof, insect-proof and moisture-proof functions
- Suitable for T8 and T5 fluorescent tubes, LED tubes
- Made with the best PC materials, not easy to break, durable
- Various materials: PC, PS, ABS optional

- 防水等級:IP65;認證標準:CE ROHS
- 具有防水、防塵、防蟲、防潮功能
- 適合T8和T5螢光燈管,LED燈管
- 採用優質PC材料製作,不易破裂,耐用
- 多種材料:PC、PS、ABS可選

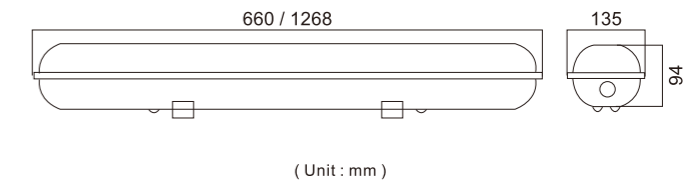

Specification 產品規格 >>

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Color Temperature 色溫	Life Time 壽命	Beam Angle 光束角	Operating Temperature 工作溫度	IP Grade IP等級	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)		(mm)
IPB-P0618-N65-D	85~265	2*9	100	>80	2700-6500	30000	120	-20~45	IP 65	660*135*94
IPB-P1236-N65-D	85~265	2*18	100	>80	2700-6500	30000	120	-20~45	IP 65	1268*135*94

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Size Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度, 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意