


# Time Control ON/OFF LED T8 Tube

Series Type: TC

## Features 產品特點 >>

- Uniform light emission
- Retrofit to existing T8 lights on EM
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Photo-biological test IEC62471 certification – exemption group
- 發光均勻
- 對現有的T8燈進行改造
- SPM設計即電源電路保護，在故障時可立即切斷單個LED電路
- 光生物試驗IEC62471認證-豁免組

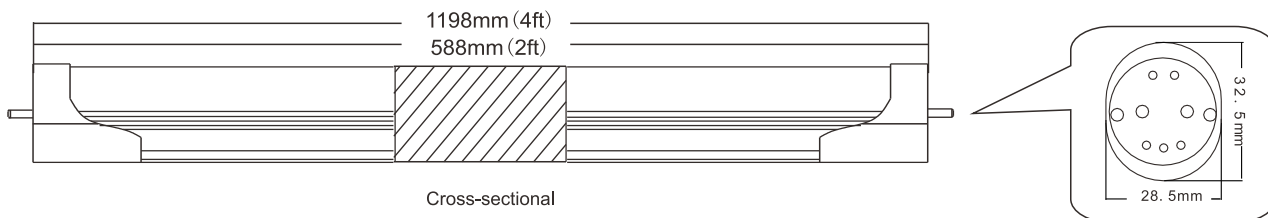

## Specification 產品規格 >>

Model 型號	Voltage 電壓 (V)	Wattage 功率 (W)	Length 長度 (mm)	Lamp Life 光度壽命 (Hrs)	Colour Temp 色溫 (K)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Lamp Base 燈腳	PCS/CTN 每箱數量 (pcs)
LT-I0609-TC128A	100~240	9	600	50000	3000/4000/6000	120	>80	T8,G13	25
LT-I1218-TC128A	100~240	12	1800	50000	3000/4000/6000	120	>80	T8,G13	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意