



Recessed LED Cabinet Light Surface Round

Series Type: KBL-IB



Features 產品特點 >>

- 12mm thickness design ,Invisible LED Chip
- Uniform light emission, The beam angle is 180°
- Low Power consumption < 2W
- Other options:(1)1-10V input , Dimmable brightness output (2)Manual or Remote control function
- Application: Kitchen cabinet, Wine cabinet & Wardrobe, Bathroom cabinet ,Closet, Show cabinet ,etc
- 12毫米厚度設計,隱形LED晶片
- 發光均勻,光束角度180°
- 低功耗< 2W
- 其他選項: (1) 1- 10v輸入, 可調亮度輸出 (2) 手動或遙控功能
- 適用範圍: 廚櫃、酒櫃、衣櫃、浴室櫃、衣櫃、陳列櫃等

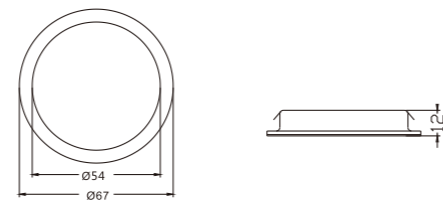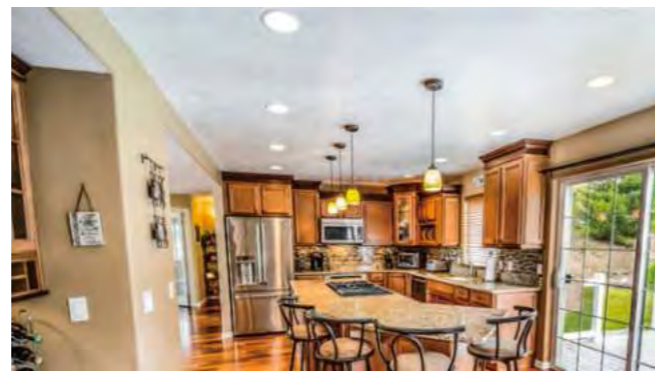

Unit : mm

Specification 產品規格 >>

Model 型號	DC Voltage 電壓 (V)	Wattage 功率 (W)	Standard Size 標準尺寸 (mm)	Lamp Life 光度壽命 (Hrs)	Colour Temp 色溫 (K)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Hole Size 孔尺寸 (mm)	Pcs/Box 每箱數量 (Pcs)
KBL-IB0302-S88E	12/24	1	67*12	50000	3000/4000/6500	80	>93	Ø45	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意


Recessed LED Cabinet Light

Series Type: KBL-0302



Features 產品特點 >>

- 12mm thickness design, Invisible LED Chip
- Uniform light emission, The beam angle is 180°
- Low Power consumption < 2W, Shell color: white/black/silver
- Other options:(1)1-10V input , Dimmable brightness output (2)Manual or Remote control function
- Application: Kitchen cabinet, Wine cabinet & Wardrobe, Bathroom cabinet ,Closet, Show cabinet ,etc
- 12毫米厚度設計,隱形LED晶片
- 發光均勻,光束角度180°
- 低功耗< 2W,外殼顏色: 白/黑/銀
- 其他選項: (1) 1- 10v輸入, 可調亮度輸出 (2) 手動或遙控功能
- 適用範圍: 廚櫃、酒櫃、衣櫃、浴室櫃、衣櫃、陳列櫃等

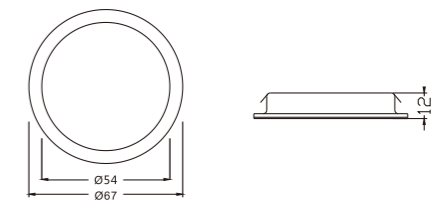

Unit : mm

Specification 產品規格 >>

Model 型號	DC Voltage 電壓 (V)	Wattage 功率 (W)	Standard Size 標準尺寸 (mm)	Lamp Life 光度壽命 (Hrs)	Colour Temp 色溫 (K)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Hole Size 孔尺寸 (mm)	Pcs/Box 每箱數量 (Pcs)
KBL-0302	12/24	2	67*12	50000	3000/4000/6500	100	>80	Ø58	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意