

# 4inch LED Down Light

## Model : DL-0405-T108E

### Application


This product is good for workshop, office, bank, hospital, shopping centre, subway, school, and other indoor places which require light of high luminosity and energy-saving.

### Product Advantages:

1. Energy saving: It save more than 70% energy than traditional Down Light.
2. Eco-Green: No radiation, no mercury, no lead, no harmful elements, all products can be recycled
3. High light efficiency: The product can reach, 100lm/W
4. It is safe and easy to be used and installed



Model:DL-0405-T108E

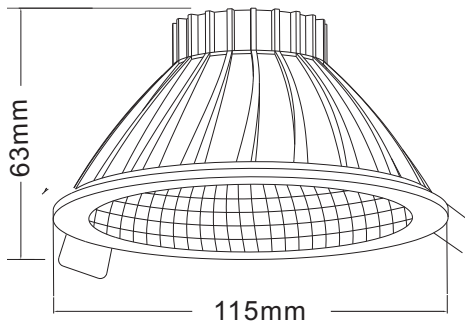

### Standard

Outer Diameter	Ø115mm
Hole Diameter	Ø100mm
Height	63mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	500lm
Power Factor	> 0.92
Power (W)	5W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# 5inch LED Down Light

## Model : DL-0507-T108E

### Application


This product is good for workshop, office, bank, hospital, shopping centre, subway, school, and other indoor places which require light of high luminosity and energy-saving.

### Product Advantages:

1. Energy saving: It save more than 70% energy than traditional Down Light.
2. Eco-Green: No radiation, no mercury, no lead, no harmful elements, all products can be recycled
3. High light efficiency: The product can reach, 100lm/W
4. It is safe and easy to be used and installed



Model:DL-0507-T108E

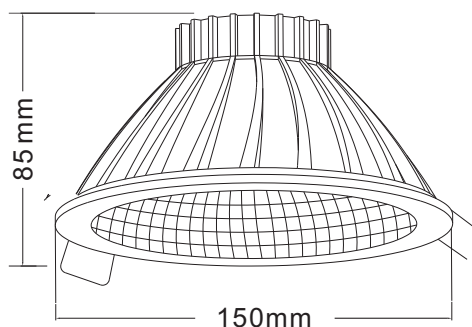

### Standard

Outer Diameter	Ø150mm
Hole Diameter	Ø125mm
Height	85mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	700lm
Power Factor	> 0.92
Power (W)	7W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# 6inch LED Down Light

## Model : DL-0608-T108E

### Application


This product is good for workshop, office, bank, hospital, shopping centre, subway, school, and other indoor places which require light of high luminosity and energy-saving.

### Product Advantages:

1. Energy saving: It save more than 70% energy than traditional Down Light.
2. Eco-Green: No radiation, no mercury, no lead, no harmful elements, all products can be recycled
3. High light efficiency: The product can reach, 100lm/W
4. It is safe and easy to be used and installed



Model:DL-0608-T108E

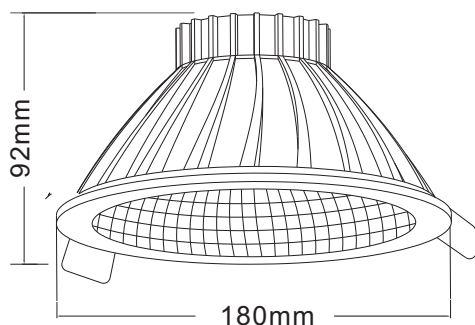

### Standard

Outer Diameter	Ø180mm
Hole Diameter	Ø150mm
Height	92mm
Voltage (V)	AC85-265V
Beam Angle	120 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	720lm
Power Factor	> 0.92
Power (W)	8W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# 8inch LED Down Light

## Model : DL-0810-T108E

### Application


This product is good for workshop, office, bank, hospital, shopping centre, subway, school, and other indoor places which require light of high luminosity and energy-saving.

### Product Advantages:

1. Energy saving: It save more than 70% energy than traditional Down Light.
2. Eco-Green: No radiation, no mercury, no lead, no harmful elements, all products can be recycled
3. High light efficiency: The product can reach, 100lm/W
4. It is safe and easy to be used and installed



Model:DL-0810-T108E

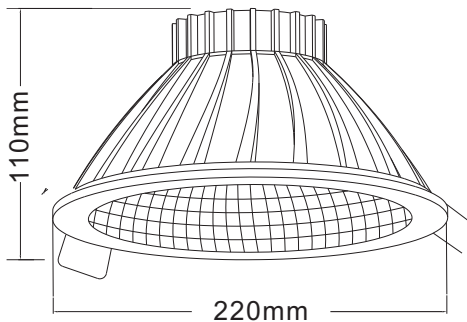

### Standard

Outer Diameter	Ø220mm
Hole Diameter	Ø190mm
Height	110mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	100lm
Power Factor	> 0.92
Power (W)	10W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# Recessed LED Down Light

## Model : DL-0620

### **Features:**


- Designed for commercial & residential usages in recess space
- High light efficacy : up to 130lm/W
- Low heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brands
- Other options:
- Housing sizes (4/6/8 inches)
- Other wattage (6-30w) available on request



Model :DL-0620

### **Standard**

AC input	AC85-265V
Power (W)	20W or other wattage (6W-30W)
Power Factor	> 0.95
Outer Diameter	Ø190mm
Hole Diameter	Ø165mm
Height	60mm
Body Frame	AL 6063
Diffuser Cover	PC
LED Light Source	Taiwan origin
Luminous Efficacy	100~130 lm/W
Luminous Flux(lm)	2000~2600lm
CRI	>80
Viewing Angle	120 degree
Color Temp	2700K~6500K
Life Span (Hrs)	up to 50,000
EMC	EN55015:2013 EN61547:2009 EN61000-3-2:2006+A1:2009+A2:2009 EN61000-3-3:2013
LVD	EN60598-2-2:2012 EN60598-1:2008+A11:2009

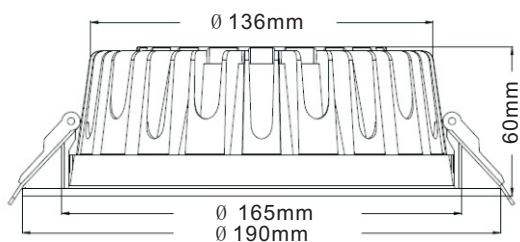

# Recessed LED Down Light




## Model : DL-0824-H108B

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0824-H108B

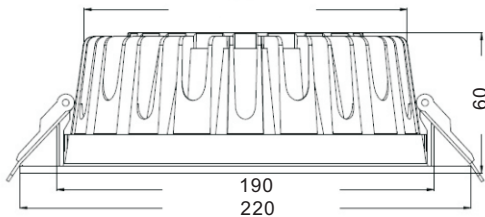

### Standard

Outer Diameter	Ø220mm
Hole Diameter	Ø190mm
Height	60mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	2400lm
Power Factor	> 0.92
Power (W)	24W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# Recessed LED Down Light




## Model : DL-0824-H138B

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 130lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0824-H138B

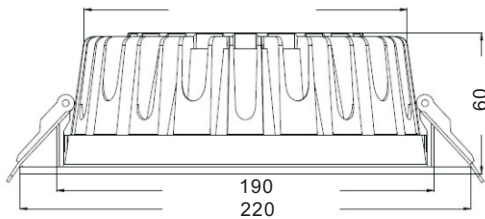

### Standard

Outer Diameter	Ø220mm
Hole Diameter	Ø190mm
Height	60mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	130 lm/W
Luminous Flux(lm)	3120lm
Power Factor	> 0.92
Power (W)	24W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# Recessed LED Down Light

## Model : DL-0827-H108B

### Features:


- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0827-H108B

### Standard

Outer Diameter	Ø220mm
Hole Diameter	Ø190mm
Height	60mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	2700lm
Power Factor	> 0.92
Power (W)	27W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

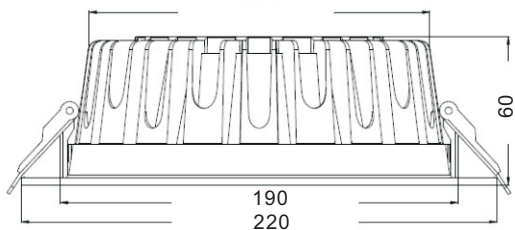



# 6inch LED Down Light

## Model : DL-0612-N118B

### Features:


- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0612-N118B

### Standard

Outer Diameter	Ø190mm
Hole Diameter	Ø155mm
Height	60mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	110 lm/W
Luminous Flux(lm)	1320lm
Power Factor	> 0.92
Power (W)	12W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

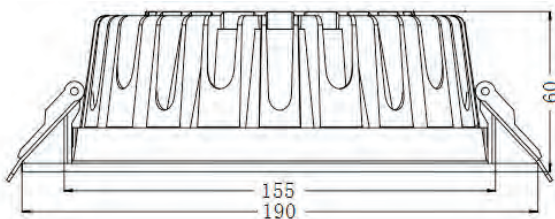

# 8inch LED Down Light

## Model : DL-0825-N118B

### Features:


- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0825-N118B

### Standard

Outer Diameter	Ø230mm
Hole Diameter	Ø200mm
Height	85mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	110 lm/W
Luminous Flux(lm)	2500lm
Power Factor	> 0.95
Power (W)	25W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

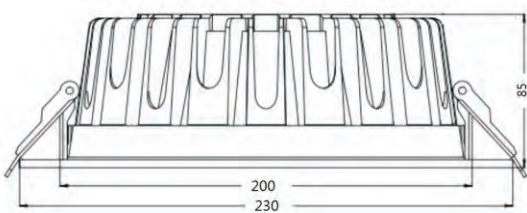

# 6inch LED Down Light


## Model : DL-0615-L108B

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0615-L108B

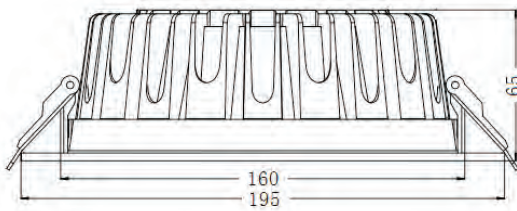

### **Standard**

Outer Diameter	Ø195mm
Hole Diameter	Ø160mm
Height	65mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	1500lm
Power Factor	> 0.95
Power (W)	15W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# 8inch LED Down Light

## Model : DL-0812-L108B

### Features:


- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0812-L108B

### Standard

Outer Diameter	Ø240mm
Hole Diameter	Ø200mm
Height	85mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	1200lm
Power Factor	> 0.95
Power (W)	12W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

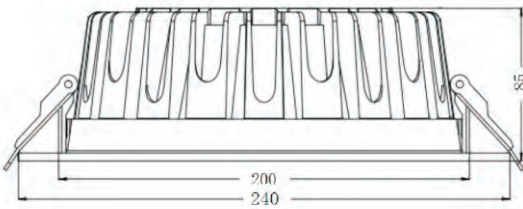

# 5inch LED Down Light

## Model : DL-0518-A108B


### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



### Standard

Outer Diameter	Ø160mm
Hole Diameter	Ø140mm
Height	50mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	1800lm
Power Factor	> 0.92
Power (W)	18W
Material	AL 6063+PC
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

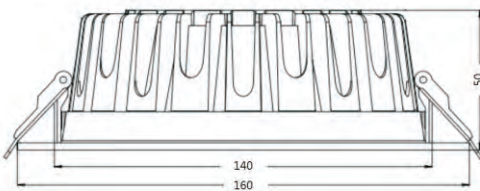

# 6inch LED Down Light

## Model : DL-0612-A108B


### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



### Standard

Outer Diameter	Ø175mm
Hole Diameter	Ø165mm
Height	65mm
Voltage (V)	AC85-265V
Beam Angle	120 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	1200lm
Power Factor	> 0.92
Power (W)	12W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

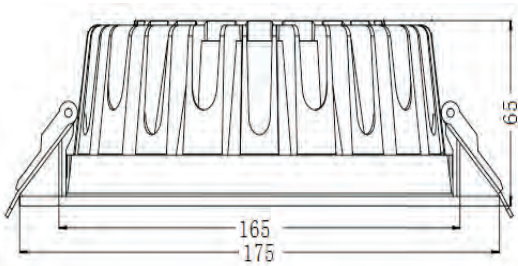

# 8inch LED Down Light

## Model : DL-0820-A108B


### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



### Standard

Outer Diameter	Ø230mm
Hole Diameter	Ø200mm
Height	70mm
Voltage (V)	AC85-265V
Beam Angle	120 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	2000lm
Power Factor	> 0.92
Power (W)	20W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

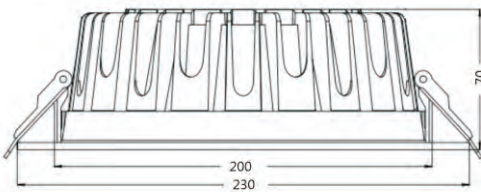

# 10inch LED Down Light



## Model : DL-1060-A108B

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



### Standard

Outer Diameter	Ø322mm
Hole Diameter	Ø270mm
Voltage (V)	AC85-265V
Beam Angle	120 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	6000lm
Power Factor	> 0.95
Power (W)	60W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C





# 5inch LED Down Light

## Model : DL-0506-I118B

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0506-I118B



### Standard

Outer Diameter	Ø125mm
Hole Diameter	Ø125mm
Height	70mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	110 lm/W
Luminous Flux(lm)	660lm
Power Factor	> 0.92
Power (W)	6W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# 6inch LED Down Light

## Model : DL-0608-I118B

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0608-I118B



### Standard

Outer Diameter	Ø170mm
Hole Diameter	Ø150mm
Height	90mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	110 lm/W
Luminous Flux(lm)	880lm
Power Factor	> 0.95
Power (W)	8W
Material	AL 6063+PC
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# 6inch LED Down Light


## Model : DL-0612-Q118B

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0612-Q118B

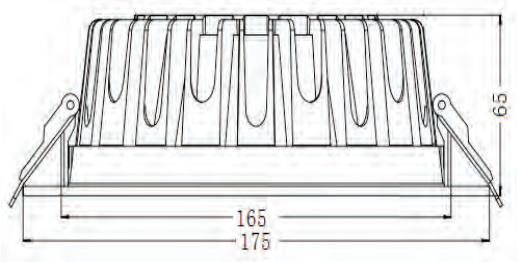

### Standard

Outer Diameter	Ø175mm
Hole Diameter	Ø165mm
Height	165mm
Voltage (V)	AC85-265V
Beam Angle	120 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	110 lm/W
Luminous Flux(lm)	1320lm
Power Factor	> 0.92
Power (W)	12W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# 6inch LED Down Light

## Model : DL-0612-R108B

### Features:


- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0612-R108B

### Standard

Outer Diameter	Ø190mm
Hole Diameter	Ø175mm
Height	80mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	1200lm
Power Factor	> 0.92
Power (W)	12W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

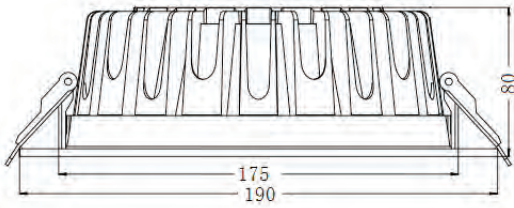

# 8inch LED Down Light


## Model : DL-0820-R108B

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0820-R108B

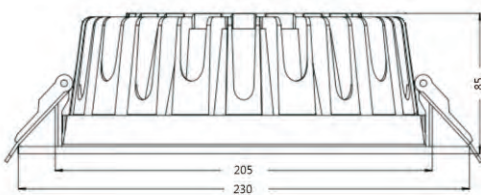

### **Standard**

Outer Diameter	Ø230mm
Hole Diameter	Ø205mm
Height	85mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	2000lm
Power Factor	> 0.92
Power (W)	20W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# 10inch LED Down Light




## Model : DL-1035-R108B

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-1035-R108B

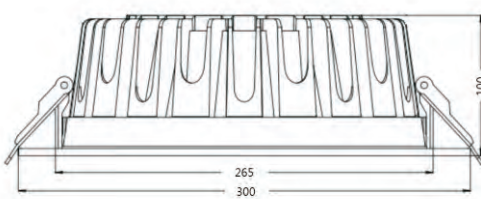

### Standard

Outer Diameter	Ø300mm
Hole Diameter	Ø265mm
Height	100mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	3500lm
Power Factor	> 0.92
Power (W)	35W
Material	AL 6063+PC
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# 8inch LED Down Light


## Model : DL-0827-D108B

### Application

This product is good for workshop, office, bank, hospital, shopping centre, subway, school, and other indoor places which require light of high luminosity and energy-saving.


### Product Advantages:

1. High light Efficiency: The product can reach, 110lm/W
2. Non Flicker.
3. Energy saving: It save more than 70% energy than traditional Down Light.
4. Eco-Green: No radiation, no mercury, no lead, no harmful elements, all products can be recycled
5. Long lifespan: 50,000 hours.
6. It is safe and easy to be used and installed

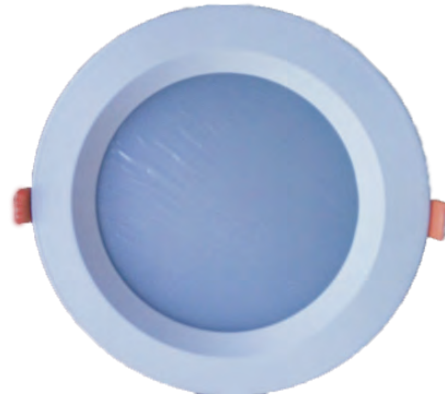

### Standard

Outer Diameter	Ø220mm
Hole Diameter	Ø180mm
Height	65mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	2700lm
Power Factor	> 0.92
Power (W)	27W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

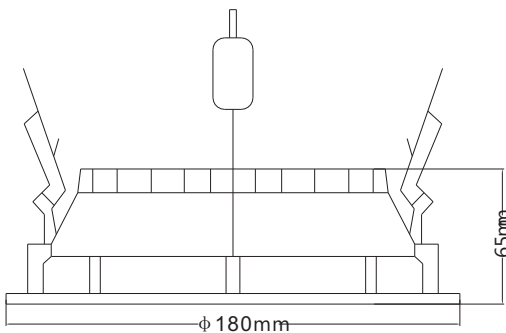

# 3inch LED Down Light


## Model : DL-0303-UC108A

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0303-UC108A



### **Standard**

Outer Diameter	Ø90mm
Hole Diameter	Ø70mm
Height	20mm
Voltage (V)	AC85-265V
Beam Angle	180 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	300lm
Power Factor	> 0.95
Power (W)	3W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C



# 6inch LED Down Light


## Model : DL-0612-UC108A

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0612-UC108A



### **Standard**

Outer Diameter	Ø190mm
Hole Diameter	Ø172mm
Height	20mm
Voltage (V)	AC85-265V
Beam Angle	90 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	1200lm
Power Factor	> 0.92
Power (W)	12W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C

# 8inch LED Down Light

## Model : DL-0818-UC108A

### Features:

- Designed for commercial & residential usages in recess space
- High Light Efficacy : 100lm/W
- Low Heat generation
- Uniform light emission
- Mat white outer frame blend into any interior
- Compatible in use with most emergency battery brand



Model:DL-0818-UC108A



### **Standard**

Outer Diameter	Ø230mm
Hole Diameter	Ø200mm
Height	20mm
Voltage (V)	AC85-265V
Beam Angle	180 degree
Color Temp	2700K~6500K
CRI	>80
Luminous Efficacy	100 lm/W
Luminous Flux(lm)	1800lm
Power Factor	> 0.92
Power (W)	18W
Material	AL 6063
Life Span (Hrs)	up to 50,000
Operating Temperature	-20°C~45°C