



EASTLIKE LED Co., Ltd

CATALOG


LED Lighting Series

Green

Low Carbon

Energy Saving

7. Circular Light

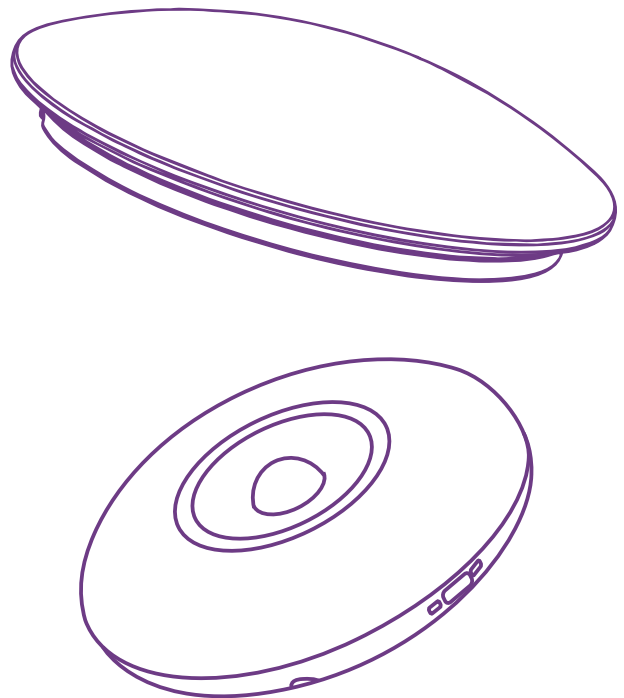

www.eastlike.com



公司簡介 Company Profile

LED Lighting

EAST



製造和營銷綠色低碳節能照明產品

Manufacturing And Marketing Green Low Carbon
And Energy Saving Lighting Products

EASTLIKE LED COMPANY 東 欏 照 明 公 司

EASTLIKE LED Co., Ltd • emerges as a lighting designer manufacturer and supplier established in Hong Kong and Mainland China .

The company devotes herself in the development, manufacturing and marketing of green, low-carbon and energy-saving lighting products. we are proud to provide a wide range of LED products


東欏LED照明公司•您的照明設計師。

我們作為製造商和供應服務於香港和中國大陸。公司致力於開發，製造和行銷綠色，低碳和節能照明產品。

我們竭誠為您服務，為您提供種類繁多的LED產品。



目录

Content

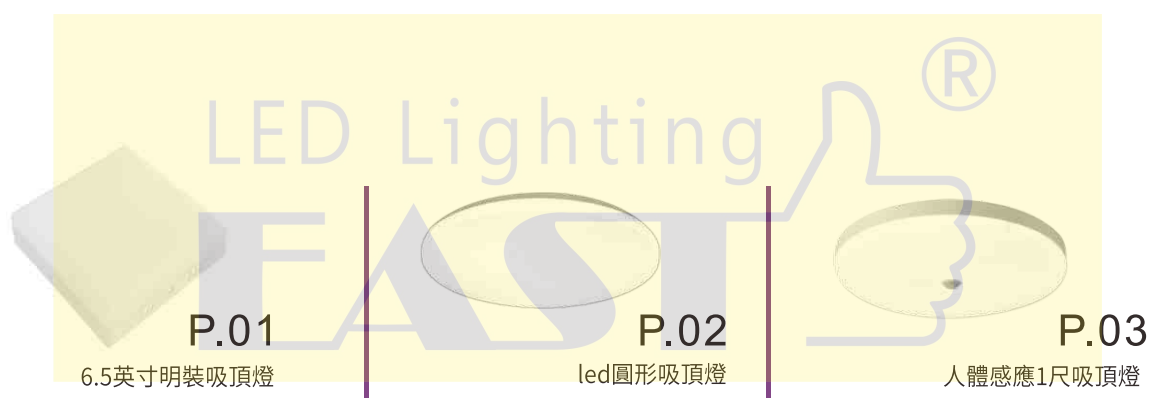

6.5-inch Surface Mounted Ceiling Lamp

Series Type: EILNS65

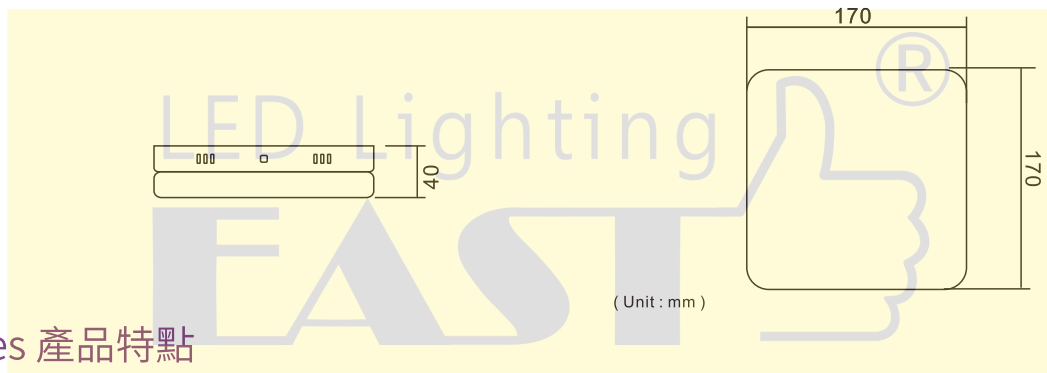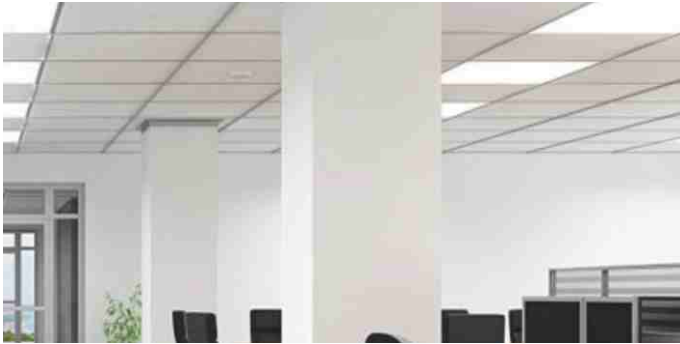

Features 產品特點

- ★ No opening is required for surface mounted downlight
- ★ The light is soft and does not hurt the eyes

- ★ 明裝筒燈無需開孔
- ★ 光線柔和不傷眼

Specification 產品規格



Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
ELR-A24-S	220-240	24	80	>80	4000	30,000	180	-20~45	170*40

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.
Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.
This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。
此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。
此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

LED Circular Ceiling Lamp

Series Type: EILRC1C

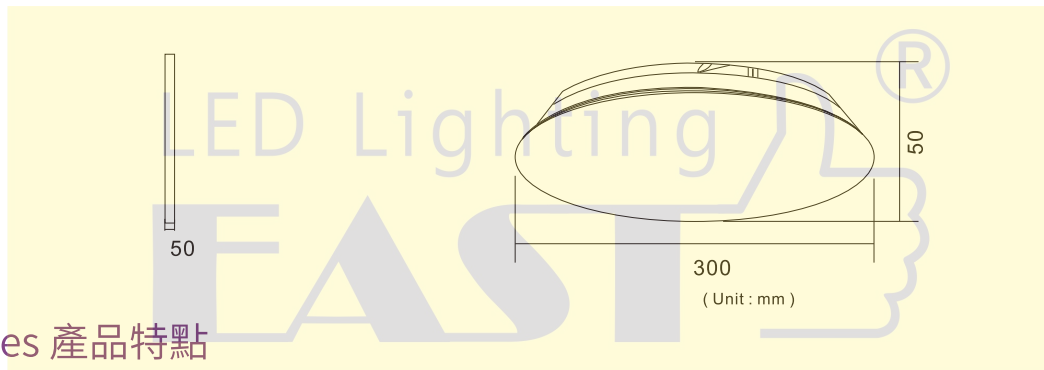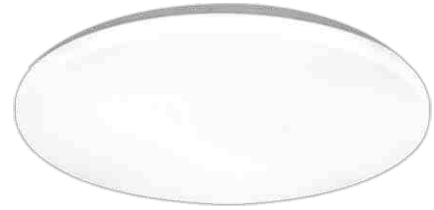

Features 產品特點

- ★ Using PMMA material lampshade, the light color is more uniform and the light transmittance is higher
- ★ The thickened iron chassis treated by paint baking process has good corrosion resistance and heat dissipation.
- ★ High brightness LED light source with lens is adopted, which has high luminous efficiency, more energy saving and more uniform light color.
- ★ The use of stroboscopic power supply is safer and protects your eyes.
- ★ 採用PMMA材料燈罩，光色更均勻，透光性更高
- ★ 使用烤漆工藝處理的加厚鐵底盤，耐腐蝕、散熱好。
- ★ 採用高亮度帶透鏡LED光源，高光效，更節能，光色更均勻。
- ★ 使用無頻閃電源，更安全更加保護你的眼睛。

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
ELR-A24-C	220	24	120	>80	4000	30,000	180	-20~70	300*50

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality


光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。

Human Body Induction Surface Diameter Ceiling lamp

Series Type: EILIR1C

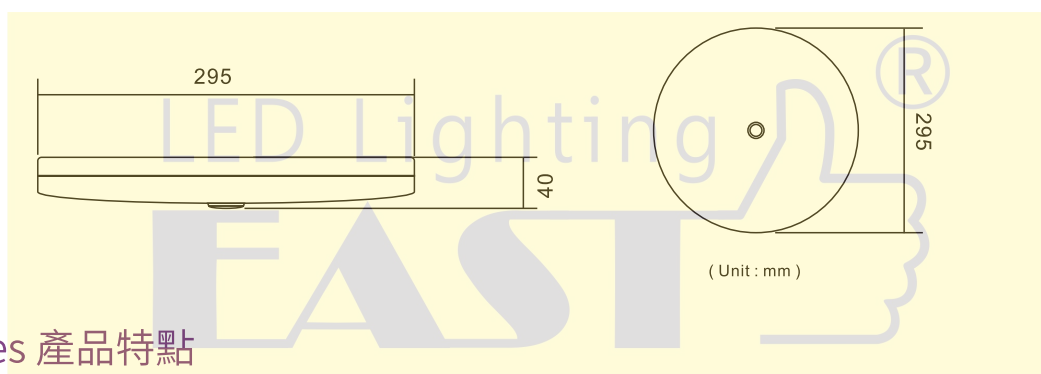

Features 產品特點

- ★ the lamp cap can be rotated 360 ° and the lamp body can be adjusted up and down
 - ★ High concentration optical reflector
 - ★ Embedded installation, installation aperture: 3 inches
 - ★ Independent constant current power supply
 - ★ It can be customized according to the requirements
- ★ 燈頭360°旋轉調節，燈身可上下調節
 - ★ 光學反光杯高聚光
 - ★ 嵌入式安裝，安裝孔徑：3英寸
 - ★ 獨立恆流電源
 - ★ 可按照要求定制

Specification 產品規格

Model 型號	Voltage 電壓	Power 功率	Lumen Output 輸出流明	Color Rendering 顯色度	Colour Temp 色溫	Life Time 壽命	Beam Angle 光束角	Working temperature 工作溫度	Size 尺寸
	(V)	(W)	(Lm/W)	(CRI)	(K)	(H)	(°)	(°C)	(mm)
ELR-A18-IR	85-265	18	90	>80	6000	30,000	180	-20~70	295*40

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs.

Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%.

This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制。

此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%。

此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意。



東 權 LED 照 明 公 司
EASTLIKE LED Co., Ltd

Office Address: Room B3, 18/F Bonsun Industrial Building,
364-366 Sha Tsui Road, Tsuen Wan, HongKong

Phone: 852-3974 5593

Fax: 852-3544 0462

Whatsapp: +852-6756 770

Email: info@eastlike.com