

LED T5 Tube



Lighting Source


Model : LT-I50608/LT-I51216

Features:

1. Uniform light emission
2. High luminous output (100 lm/W) & low power consumption
3. Retrofit to existing T5 lights
4. SPM Design-power circuit protection to cut off individual LEDs when mal-functioned
5. T6 tube body to achieve the best lighting effect
6. Options: T8 tube body
7. Emergency option available: compatible in use with most emergency battery brands & comply with part A11 of FSD regulation PPA104



Model:LT-I50608/LT-I51216

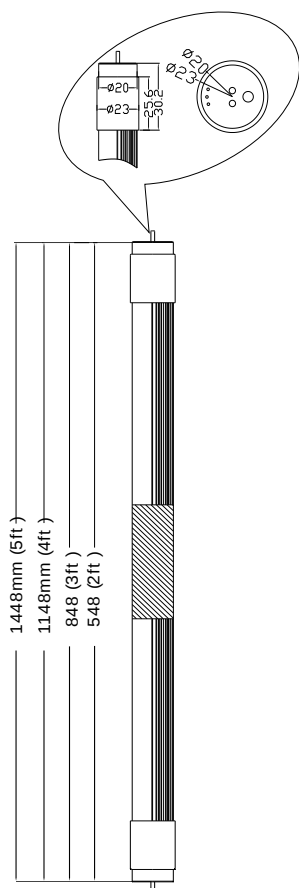

Standard

Tube Dimension	Ø20mm*548/1148mm
Voltage (V)	AC85~265V
Lamp Holder	G5
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.95
Power (W)	LT-I50608-N-T5 8W LT-I51216-N-T5 16W
Cover Material	Aluminium , PC Cover
Color Temperature	3000K / 4000K / 6000K
Life Time	50,000(H)
EMC	EN55015:2013; EN61547:2009 EN61000-3-2:2014 EN61000-3-3:2013
LVD	EN60598-2-1:1989 EN60598-1:2015