
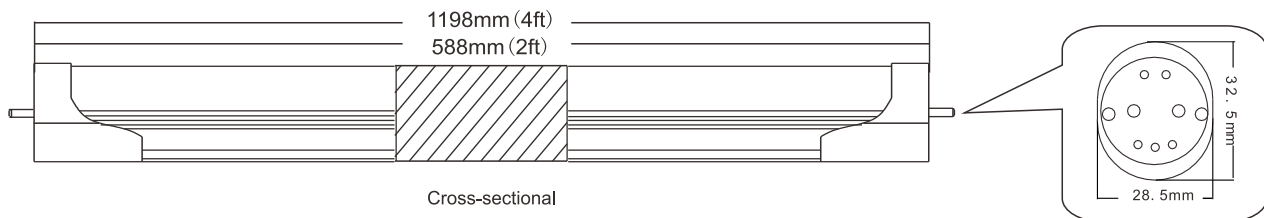


Photosensor LED T8 Tube

Series Type:PS

Features 產品特點 >>

- Uniform light emission
- Retrofit to existing T8 lights on EM
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Function: the light control probe senses the brightness of the surrounding environment in real time. According to the intensity of the brightness of the environment, it is divided into two sections of light output. When the light is strong, it is output at 30% power (can be designed) and when the light is weak, it is output at 100% power.
- 發光均勻
- 對現有的T8燈進行改造
- SPM設計即電源電路保護，在故障時可立即切斷單個LED電路
- 功能：光控探頭實時感應周圍環境亮度，根據環境亮度的強弱分2段光輸出，光線較強時以30%功率（可指定設計）輸出，光線較弱時100%功率輸出。

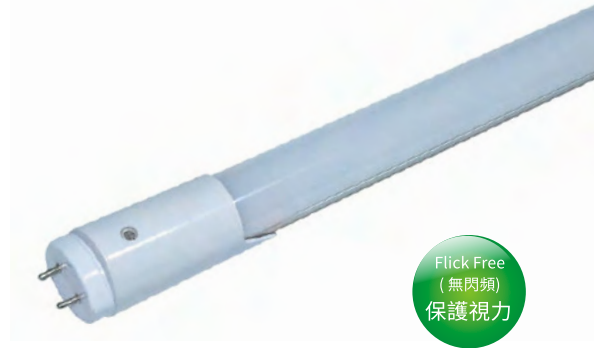

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	PCS/CTN 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(pcs)
LT-I0609-PS128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-PS128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意