


# LED Panel Light

**Model : PL-505026-N128A**

## Features:

1. Edge-lite LED panels for office & commercial application.
2. Suitable for installation in Recessed Ceilings.
3. Uniform light emission by using optical Polycarbonate.
4. High light efficiency 120lm/W (other option :140/W)
5. Emergency option available: compatible in use with most emergency battery brands & comply with part A11 of FSD regulation PPA104

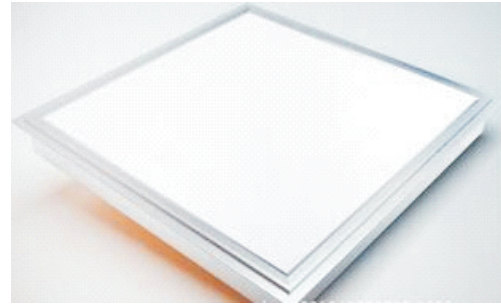

Model : PL-505026-N128A

Lighting Source

## Standard

Dimension	495*495mm
Voltage (V)	AC85-265V
Beam Angle:	180 degree
CRI	>80Ra
Luminous Efficacy	120lm/W
Power Factor	> 0.90
Power (W)	26W
Cover Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)

