


Bluetooth4.0 Slave LED T8 Tube

Series Type: SL-BT



Features 產品特點 >>

- Bluetooth adopts wireless technologies such as fast frequency hopping and time division multiple access to replace cables, low-cost and low-power
- Control the switch, strength and color of LED light through Bluetooth
- Dimming Signal: 2.4GHz Bluetooth 4.0
- Dimming Range: 30%, 50%, 70%, 100%
- 藍牙採用快速跳頻、時分多址等無線技術代替光纜, 低成本、低功耗
- 通過藍牙控制LED燈光的開關、強弱及顏色
- 調光訊號: 2.4GHz藍牙4.0
- 調光範圍: 30%、50%、70%、100%

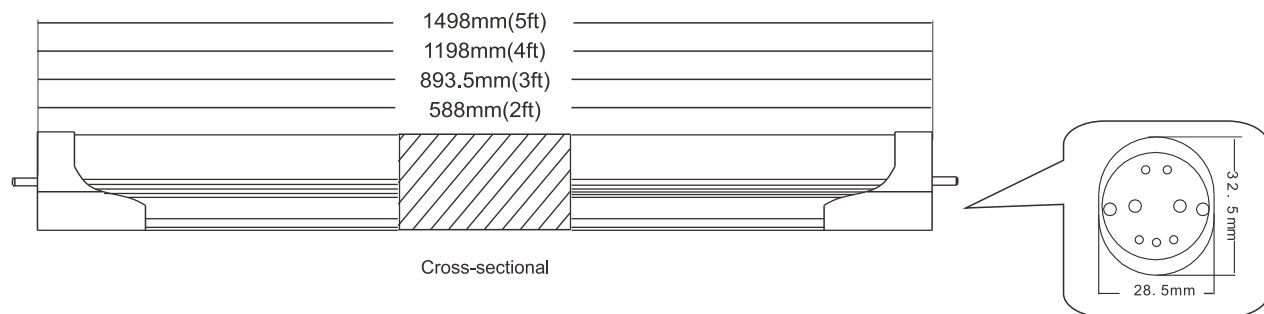

Specification 產品規格 >>

Model 型號	Voltage 電壓 (V)	Wattage 功率 (W)	Length 長度 (mm)	Lamp Life 光度壽命 (Hrs)	Colour Temp 色溫 (K)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	PCS/CTN 每箱數量 (pcs)
LT-I0609-SL128A-BT	100~240	9	600	50000	3000/4000/6500	120	>80	25
LT-I0912-SL128A-BT	100~240	12	900	50000	3000/4000/6500	120	>80	25
LT-I1218-SL128A-BT	100~240	18	1200	50000	3000/4000/6500	120	>80	25
LT-I1522-SL128A-BT	100~240	22	1500	50000	3000/4000/6500	120	>80	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意