

LED Cabinet Light Small Round


Series Type: KBL-C



Flick Free
(無閃頻)
保護視力

Features 產品特點 >>

- 12mm thickness design, Invisible LED Chip
- Uniform light emission, The beam angle is 180°
- Low Power consumption < 2W
- Other options:(1)1-10V input , Dimmable brightness output
(2)Manual or Remote control function
- Application: Kitchen cabinet, Wine cabinet & Wardrobe, Bathroom cabinet ,Closet, Show cabinet ,etc
- 12毫米厚度設計, 隱形LED晶片
- 發光均勻, 光束角度180°
- 低功耗< 2W
- 其他選項: (1) 1- 10v輸入, 可調亮度輸出
(2) 手動或遙控功能
- 適用範圍: 廚櫃、酒櫃、衣櫃、浴室櫃、衣櫃、陳列櫃等

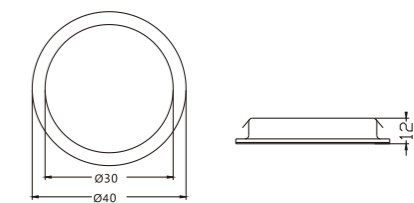

Unit : mm

Specification 產品規格 >>

Model 型號	DC Voltage 電壓	Wattage 功率	Standard Size 標準尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Hole Size 孔尺寸	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(mm)	(Pcs)
KBL-C0201-S88E	12/24	1	40*12	50000	3000/4000/6500	80	>93	Ø35	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意

CABINET LIGHT

櫃燈系列