

# High performance LED T8 Tube




## Model : LT-I0609/LT-I1218

### Features:

1. Uniform light emission
2. High luminous output & Low power consumption
3. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned



Model:LT-I0609  
LT-I1218

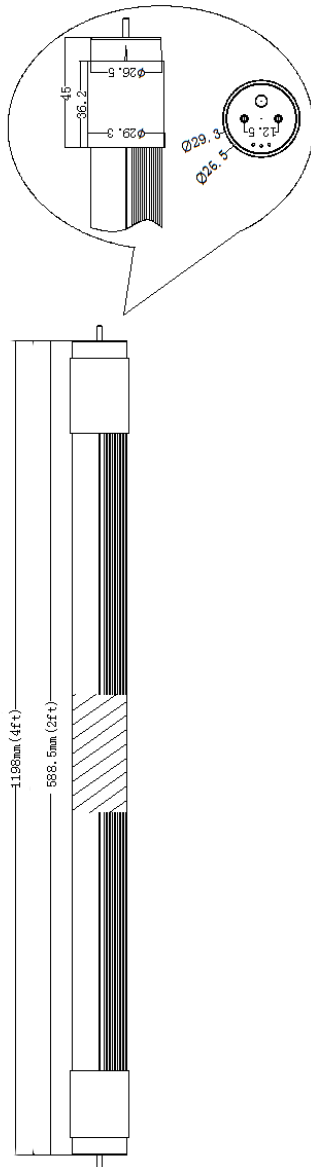

### Standard

Tube Dimension	Ø 26.5mm*588.5mm/1198mm
Voltage (V)	AC85~265V
Lamp Holder	T8, G13
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	131.25lm/W & 150lm/W
Power Factor	> 0.90
Power (W)	Model: 8W / 131.25lm/W / Total 1050lm LT-I0609 Model: 14W / 150lm/W / Total 2100lm LT-I1218
Cover Material	Aluminium , PC Cover
Color Temperature	2700K /3000K / 4000K / 6000K
Life Time	50,000(H)
EMC	EN55015:2006; EN61547:2009; EN61000-3-2:2006+A1:2009+A2:2009; EN61000-3-3:2008
LVD	IEC60598-2-1:1989&EN60598-1:2008 IEC62560-2011 IEC62031:2008 EN60598-1:2015 IEC61347-2-13:2006 IEC61347-1:2007+A1:2010 EN62776
EMF	IEC62384 EN 62493