

Microwave sensor LED Panel Light




Model:PL-PN6060-M

Features:

- 1.Edge-lite LED panels for office & commercial application.
- 2.Suitable for installation in recessed ceilings
- 3.Uniform light emission by using optical polycarbonate
- 4.100lm/W (other option : 120lm/W)
- 5.Microwave controlled internal sensor.
- 6.Full lumen in activation mode.
- 7.30% in Standby mode.
- 8.Sensor detection distance of 6-8 meter.



Model:PL-PN6060-M

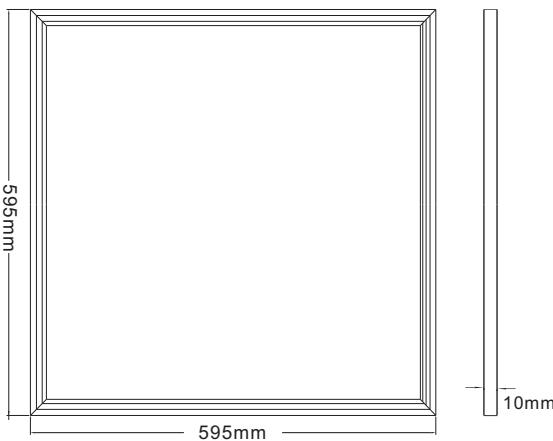

Model:PL-PN6060-M

Standard

Dimension	595*595mm 295*295mm 295*595mm 295*1195mm 595*1195mm
Voltage (V)	AC85-265V
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100lm/W or 120lm/W
Power Factor	> 0.90
Power (W)	PL-PN3030 8W PL-PN3060 18W PL-PN30120 36W PL-PN6060 36W PL-PN30120 72W
Cover Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
Detection Distance	6M ~ 8M
Detection Angle	360°
Lighting Time Delay / Exit Time	25 seconds