

TGH (50W-400W)

投光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Integrated die cast aluminum molding, sturdy and durable, with high thermal conductivity
一体化压铸铝成型, 结实耐用, 高导热性能
Innovative snap on lens design with high light transmittance and excellent waterproof function
创新卡扣式透镜设计, 透光率高, 防水功能优异
High pole lighting for sports venues, squares, airports, ports, docks, etc
体育场馆、广场、机场、港口、码头等高杆照明
Bracket installation, working environment: -35°C~+50°C
支架安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGH50	IL-TGH100	IL-TGH200	IL-TGH300	IL-TGH400
Dimension尺寸(mm)	310*192*45	395*248*58	395*360*58	495*395*60	585*395*60
Power功率	50W	100W	200W	300W	400W
Voltage输入电压	AC100-277V 50/60Hz				
LED Brand 芯片品牌	Lumileds				
CRI显指	Ra>70/80/90				
Efficiency光效	130LM/W±10%				
Total Flux(lm)光通量	6500lm	13000lm	26000lm	39000lm	52000lm
CCT色温	3000K/4000K/5000K/5700K/6500K				
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics				
Beam Angle发光角度	60°/90°				
IP Grade防护等级	IP66				

Optical pattern diagram 光型图



Application scenarios 应用场景



TGP (500W-1000W)

投光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Integrated die cast aluminum molding, sturdy and durable, with high thermal conductivity
一体化压铸铝成型, 结实耐用, 高导热性能
Ultra high temperature lens, baked paint process, corrosion-resistant
超高温透镜, 烤漆工艺, 耐腐蚀
Lighting for billboards, roads, municipal squares, bridges and tunnels, sports venues, construction sites, and other places
广泛应用于广告牌、道路、市政广场、桥梁隧道、体育场馆、建筑工地等场所照明
Bracket installation, working environment: -35°C~+50°C
支架安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGP500	IL-TGP750	IL-TGP1000
Dimension尺寸(mm)	589*474*60	589*570*60	589*667*60
Power功率	500W	750W	1000W
Voltage输入电压	AC100-277V 50/60Hz		
LED Brand 芯片品牌	Lumileds		
CRI显指	Ra>70/80		
Efficiency光效	170LM/W±10%		
Total Flux(lm)光通量	85000lm	127500lm	170000lm
CCT色温	3000K/4000K/5000K/5700K/6500K		
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics		
Beam Angle发光角度	15°/30°/60°/90°/P6		
IP Grade防护等级	IP66		

Optical pattern diagram 光型图

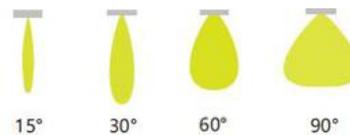

Application scenarios 应用场景



TGA (30W-300W)

投光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Die cast aluminum alloy shell, surface powder baking process, strong corrosion resistance, not easy to age
压铸铝合金外壳, 表面粉烤工艺, 耐腐蚀性强, 不易老化
Thick tempered glass face mask, resistant to pressure, cracking, high temperature, and good transparency
加厚钢化玻璃面罩, 抗压防裂耐高温, 透光性好
Outdoor lighting for tunnels, landscapes, parking lots, parks, squares, parks, sports fields, construction sites, etc
隧道, 景观, 停车场, 公园, 广场, 公园, 运动场, 建筑工地等户外照明
Bracket installation, working environment: -35°C~+50°C
支架安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGA30	IL-TGA50	IL-TGA100	IL-TGA150	IL-TGA200	IL-TGA300
Dimension尺寸(mm)	186*166*38	225*195*40	288*246*53	320*275*53	353*305*58	405*338*58
Power功率	30W	50W	100W	150W	200W	300W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	130LM/W±10%					
Total Flux(lm)光通量	3900lm	6500lm	13000lm	19500lm	26000lm	39000lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle发光角度	30°/60°/90°/120°					
IP Grade防护等级	IP65					

Optical pattern diagram 光型图

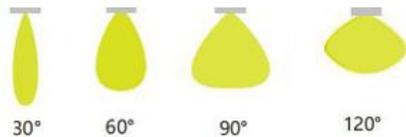

Application scenarios 应用场景



TGS (50W-500W)

投光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Integrated die cast aluminum molding, sturdy and durable, with high thermal conductivity
一体化压铸铝成型, 结实耐用, 高导热性能
Optical PC lens+4mm tempered glass, IK08 anti-collision rating, UV resistance, 94% transmittance
光学PC透镜, 外加4mm钢化玻璃, IK08防撞等级, 抗UV, 透光率94%
High pole lighting for sports venues, squares, airports, ports, docks, etc
体育场馆, 广场, 机场, 港口, 码头等高杆照明
Bracket installation, working environment: -35°C~+50°C
支架安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGS50	IL-TGS100	IL-TGS150	IL-TGS200	IL-TGS300	IL-TGS400	IL-TGS500
Dimension尺寸(mm)	290*230*48	310*300*53	360*300*53	370*350*53	430*400*58	548*445*70	555*560*76
Power功率	50W	100W	150W	200W	300W	400W	500W
Voltage输入电压	AC100-277V 50/60Hz						
LED Brand 芯片品牌	Lumileds						
CRI显指	Ra>70/80						
Efficiency光效	150LM/W±10%						
Total Flux(lm)光通量	7500lm	15000lm	22500lm	30000lm	45000lm	60000lm	75000lm
CCT色温	3000K/4000K/5000K/5700K/6500K						
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics						
Beam Angle角度	30°/60°/90°/120°/T2/T3/T4						
IP Grade防护等级	IP66						

Optical pattern diagram 光型图

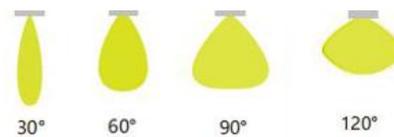

Application scenarios 应用场景



TGE (30W-200W)

投光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Die cast aluminum alloy shell with strong air convection design to enhance heat dissipation efficiency
压铸铝合金外壳, 空气强对流设计, 提升散热效能
Thick tempered glass face mask, resistant to pressure, cracking, high temperature, and good transparency
加厚钢化玻璃面罩, 抗压防裂耐高温, 透光性好
Outdoor lighting for tunnels, landscapes, parking lots, parks, squares, parks, sports fields, construction sites, etc
隧道, 景观, 停车场, 公园, 广场, 公园, 运动场, 建筑工地等户外照明
Bracket installation, working environment: -35°C~+50°C
支架安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGE30	IL-TGE50	IL-TGE80	IL-TGE100	IL-TGE150	IL-TGE200
Dimension尺寸(mm)	241*175*45	280*230*53	300*255*55	330*305*60	370*330*60	390*370*60
Power功率	30W	50W	80W	100W	150W	200W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	130LM/W±10%					
Total Flux(lm)光通量	3900lm	6500lm	10400lm	13000lm	19500lm	26000lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle发光角度	30°/60°/90°/120°/TYPE2/TYPE3/TYPE4					
IP Grade防护等级	IP66					

Optical pattern diagram 光型图

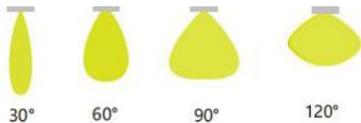

Application scenarios 应用场景



TGT (50W-400W)

投光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Integrated die cast aluminum molding, sturdy and durable, with high thermal conductivity
一体化压铸铝成型, 结实耐用, 高导热性能
Optical PC lens+4mm tempered glass, IK08 anti-collision rating, UV resistance, 94% transmittance
光学PC透镜, 外加4mm钢化玻璃, IK08防撞等级, 抗UV, 透光率94%
High pole lighting for sports venues, squares, airports, ports, docks, etc
体育场馆、广场、机场、港口、码头等高杆照明
Bracket installation, working environment: -35°C~+50°C
支架安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGT50	IL-TGT100	IL-TGT150	IL-TGT200	IL-TGT300	IL-TGT400
Dimension尺寸(mm)	225*289*44	270*345*49	323*403*57	353*454*56.5	408*499*59	508*513*64
Power功率	50W	100W	150W	200W	300W	400W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	150LM/W±10%					
Total Flux(lm)光通量	7500lm	15000lm	22500lm	30000lm	45000lm	60000lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle发光角度	30°/60°/90°/120°/T2M					
IP Grade防护等级	IP66					

Optical pattern diagram 光型图

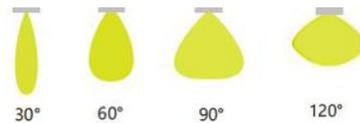

Application scenarios 应用场景



TGG (50W-400W)

投光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Integrated die cast aluminum shell, stylish and simple appearance, lightweight, and more corrosion-resistant
一体化压铸铝外壳, 外观时尚简洁, 重量轻, 更耐腐蚀
Thick tempered glass face mask, resistant to pressure, cracking, high temperature, and good transparency
加厚钢化玻璃面罩, 抗压防裂耐高温, 透光性好
Outdoor lighting for tunnels, landscapes, parking lots, parks, squares, parks, sports fields, construction sites, etc
隧道, 景观, 停车场, 公园, 广场, 公园, 运动场, 建筑工地等户外照明
Bracket installation, working environment: -35°C~+50°C
支架安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGG50	IL-TGG80	IL-TGG100	IL-TGG150	IL-TGG200	IL-TGG300	IL-TGG400
Dimension尺寸(mm)	312*207*53	312*258*53	312*309*53	362*309*53	413*309*53	437*411*61	443*515*62
Power功率	50W	80W	100W	150W	200W	300W	400W
Voltage输入电压	AC100-277V 50/60Hz						
LED Brand 芯片品牌	Lumileds						
CRI显指	Ra>70/80						
Efficiency光效	150LM/W±10%						
Total Flux(lm)光通量	7500lm	12000lm	15000lm	22500lm	30000lm	45000	60000lm
CCT色温	3000K/4000K/5000K/5700K/6500K						
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics						
Beam Angle角度	15°/30°/60°/90°/T2M/T3M/120°50°偏光						
IP Grade防护等级	IP66						

Optical pattern diagram 光型图



Application scenarios 应用场景



TGD (50W-300W)

投光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Die cast aluminum alloy shell with strong air convection design to enhance heat dissipation efficiency
压铸铝合金外壳, 空气强对流设计, 提升散热效能
Thick tempered glass face mask, resistant to pressure, cracking, high temperature, and good transparency
加厚钢化玻璃面罩, 抗压防裂耐高温, 透光性好
Outdoor lighting for tunnels, landscapes, parking lots, parks, squares, parks, sports fields, construction sites, etc
隧道, 景观, 停车场, 公园, 广场, 公园, 运动场, 建筑工地等户外照明
Bracket installation, working environment: -35°C~+50°C
支架安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGD50	IL-TGD80	IL-TGD100	IL-TGD150	IL-TGD200	IL-TGD300
Dimension尺寸(mm)	300*222*54	315*273*56	367*280*56	402*337*61	452.5*337*61	482.5*455*61
Power功率	50W	100W	150W	200W	250W	300W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	150LM/W±10%					
Total Flux(lm)光通量	7500lm	15000lm	22500lm	30000lm	37500lm	45000lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle角度	7°/15°/30°/60°/90°/120°/T2M/T3M					
IP Grade防护等级	IP66					

Optical pattern diagram 光型图

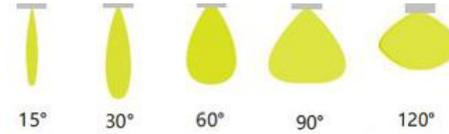

Application scenarios 应用场景



TGF (50W-240W)

投光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Integrated die cast aluminum shell, stylish and simple appearance, lightweight, and more corrosion-resistant
一体化压铸铝外壳, 外观时尚简洁, 重量轻, 更耐腐蚀
Thick tempered glass face mask, resistant to pressure, cracking, high temperature, and good transparency
加厚钢化玻璃面罩, 抗压防裂耐高温, 透光性好
Outdoor lighting for tunnels, landscapes, parking lots, parks, squares, parks, sports fields, construction sites, etc
隧道, 景观, 停车场, 公园, 广场, 运动场, 建筑工地等户外照明
Bracket installation, working environment: -35°C~+50°C
支架安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGF50	IL-TGF80	IL-TGF100	IL-TGF150	IL-TGF200	IL-TGF240
Dimension尺寸(mm)	320*239*53	364*264*58	413*315*63	349*440*63	379*480*63	573*418*60
Power功率	50W	80W	100W	150W	200W	240W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	130LM/W±10%					
Total Flux(lm)光通量	6500lm	10400lm	13000lm	19500lm	26000lm	31200lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle发光角度	30°/60°/90°/120°/TYPE2/TYPE3/TYPE4					
IP Grade防护等级	IP65					

Optical pattern diagram 光型图

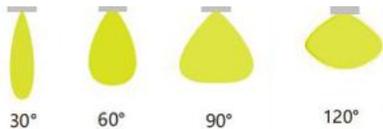

Application scenarios 应用场景



TGL (100W-240W)

投光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY





Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Integrated die cast aluminum molding, sturdy and durable, with high thermal conductivity
一体化压铸铝成型, 结实耐用, 高导热性能
Optical PC lens+4mm tempered glass, IK08 anti-collision rating, UV resistance, 94% transmittance
光学PC透镜, 外加4mm钢化玻璃, IK08防撞等级, 抗UV, 透光率94%
High pole lighting for sports venues, squares, airports, ports, docks, etc
体育场馆, 广场, 机场, 港口, 码头等高杆照明
Bracket installation, working environment: -35°C~+50°C
支架安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGL100	IL-TGL150	IL-TGL200	IL-TGL240
Dimension尺寸(mm)	425*270*52	473*320*51	474*370*52	474*370*52
Power功率	100W	150W	200W	240W
Voltage输入电压	AC100-277V 50/60Hz			
LED Brand 芯片品牌	Lumileds			
CRI显指	Ra>70/80			
Efficiency光效	140LM/W±10%			
Total Flux(lm)光通量	14000lm	21000lm	28000lm	33600lm
CCT色温	3000K/4000K/5000K/5700K/6500K			
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics			
Beam Angle发光角度	15°/30°/60°/90°/120°			
IP Grade防护等级	IP66			

Optical pattern diagram 光型图

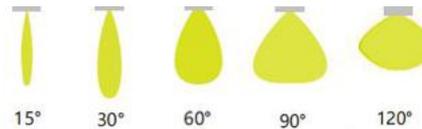

Application scenarios 应用场景



TGB (50W-400W)

泛光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan

进口Lumileds光源, 高亮度、低光衰、寿命长

Die cast aluminum alloy shell, surface powder baking process, strong corrosion resistance, not easy to age

压铸铝合金外壳, 表面粉烤工艺, 耐腐蚀性强, 不易老化

Thick tempered glass face mask, resistant to pressure, cracking, high temperature, and good transparency

加厚钢化玻璃面罩, 抗压防裂耐高温, 透光性好

Outdoor lighting for tunnels, landscapes, parking lots, parks, squares, parks, sports fields, construction sites, etc

隧道, 景观, 停车场, 公园, 广场, 公园, 运动场, 建筑工地等户外照明



Working environment: -35°C~+50°C

工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TGB50	IL-TGB80	IL-TGB100	IL-TGB150	IL-TGB200	IL-TGB300	IL-TGB400
Dimension尺寸(mm)	311*220*50	355*245*55	403*295*60	431*330*60	471*360*60	565*457*65	585*559*70
Power功率	50W	80W	100W	150W	200W	300W	400W
Voltage输入电压	AC100-277V 50/60Hz						
LED Brand 芯片品牌	Lumileds						
CRI显指	Ra>70/80						
Efficiency光效	130LM/W±10%						
Total Flux(lm)光通量	6500lm	10400lm	13000lm	19500lm	26000lm	39000	5600005lm
CCT色温	3000K/4000K/5000K/5700K/6500K						
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics						
Beam Angle发光角度	30°/60°/90°/120°/TYPE2/TYPE3/TYPE4						
IP Grade防护等级	IP65						

Optical pattern diagram 光型图

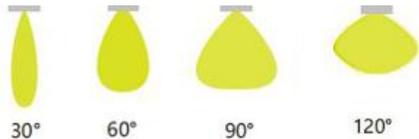

Application scenarios 应用场景



TGC (50W-200W)

泛光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY



Imported Lumileds light source, high brightness, low light decay, long lifespan

进口Lumileds光源, 高亮度、低光衰、寿命长

Pure aluminum A1070 fin heat sink, stable and excellent heat dissipation performance of the entire lamp

采用纯铝A1070材质的鳍片散热器, 整灯散热性能稳定优异

Thick tempered glass face mask, resistant to pressure, cracking, high temperature, and good transparency

加厚钢化玻璃面罩, 抗压防裂耐高温, 透光性好

Outdoor or indoor places such as factories, airports, venues, parks, squares, tourist attractions, and large buildings

厂房, 机场, 场馆, 公园, 广场, 旅游景点, 大型建筑等户外或室内场所照明


Working environment: -35°C~+50°C

工作环境: -35°C~+50°C


Product specs 产品参数

Model 产品型号	IL-TGC50	IL-TGC70	IL-TGC100	IL-TGC150	IL-TGC200
Dimension尺寸(mm)	283*220*101	283*220*122	316*270*183	316*270*183	316*270*183
Power功率	50W	70W	100W	150W	200W
Voltage输入电压	AC100-277V 50/60Hz				
LED Brand 芯片品牌	Lumileds				
CRI显指	Ra>70/80				
Efficiency光效	130LM/W±10%				
Total Flux(lm)光通量	6500lm	9100lm	13000lm	19500lm	26000lm
CCT色温	4000K/5000K/5700K/6500K				
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics				
Beam Angle发光角度	120°				
IP Grade防护等级	IP65				

Optical pattern diagram 光型图



Application scenarios 应用场景

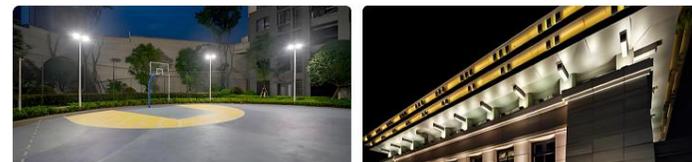

FLM (20W-100W)

泛光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
 进口Lumileds光源, 高亮度、低光衰、寿命长
 Integrated die cast aluminum lamp body, surface powder baking process, not easily corroded or rusted
 一体化压铸铝材灯体, 表面粉烤工艺, 不易腐蚀生锈
 High intensity optical PC lens, IK08, Can achieve multi angle selection of 60°/90°/60° X120°
 高强度光学PC透镜, IK08, 可实现多角度选择60°/90°/60°X120°
 304 stainless steel screws, galvanized bracket, anti-corrosion treated shell can be used in coastal environments
 304 不锈钢螺丝, 镀锌支架, 防腐处理外壳可以用于海岸环境
 Working environment: -35°C~+50°C
 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-FLM20	IL-FLM30	IL-FLM50	IL-FLM60	IL-FLM80	IL-FLM100
Dimension尺寸(mm)	116*140*53	152*208*63	196*239*76	196*239*76	241*310*85	241*310*85
Power功率	20W	30W	50W	60W	80W	100W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	130LM/W±10%					
Total Flux(lm)光通量	2600lm	3900lm	6500lm	7800lm	10400lm	13000lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle发光角度	60°/90°/60°X120°					
IP Grade防护等级	IP66					

Optical pattern diagram 光型图



Application scenarios 应用场景



FLS (50W-200W)

泛光灯
专业运动照明

FLOOD LIGHT

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
 进口Lumileds光源, 高亮度、低光衰、寿命长
 Integrated die cast aluminum lamp body, surface powder baking process, not easily corroded or rusted
 一体化压铸铝材灯体, 表面粉烤工艺, 不易腐蚀生锈
 Thick tempered glass face mask, resistant to pressure, cracking, high temperature, and good transparency
 加厚钢化玻璃面罩, 抗压防裂耐高温, 透光性好
 304 stainless steel screws, galvanized bracket, anti-corrosion treated shell can be used in coastal environments
 304 不锈钢螺丝, 镀锌支架, 防腐处理外壳可以用于海岸环境
 Working environment: -35°C~+50°C
 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-FLS50	IL-FLS100	IL-FLS150	IL-FLS200
Dimension尺寸(mm)	214*221*60	265*286*71	296*331*75	339*386*78
Power功率	50W	100W	150W	200W
Voltage输入电压	AC100-277V 50/60Hz			
LED Brand 芯片品牌	Lumileds			
CRI显指	Ra>70/80			
Efficiency光效	150LM/W±10%			
Total Flux(lm)光通量	7500lm	15000lm	22500lm	30000lm
CCT色温	3000K/4000K/5000K/5700K/6500K			
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics			
Beam Angle发光角度	120°			
IP Grade防护等级	IP66			

Optical pattern diagram 光型图



Application scenarios 应用场景

