

Manual Preset Power Consumption AC T8 Tube

Series Type: DP- 4DS





Flick Free
(無閃頻)
保護視力

Features 產品特點 >>

- Uniform light emission
- With 4 position dip switch selector
- Dimming range from 100% to 50% (100%, 85%, 75%, 50%)
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- 發光均勻
- 帶4比特dip開關選擇器
- 調光範圍從100%到50% (100%, 85%, 75%, 50%)
- SPM設計即電源電路保護，在故障時可立即切斷單個LED電路



S1	S2	S3	S4	Power
OFF	OFF	OFF	OFF	100%
OFF	OFF	ON	OFF	85%
OFF	ON	OFF	OFF	75%
ON	OFF	OFF	OFF	50%

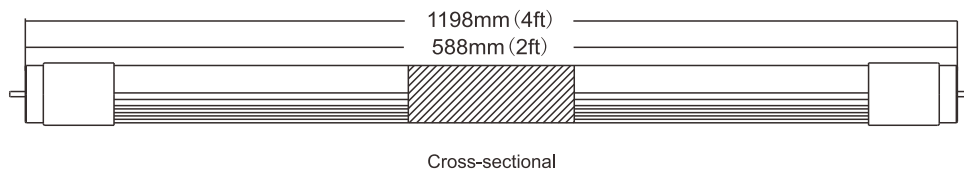

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	PCS/CTN 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(pcs)
LT-I0609-DP128A-SW	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-DP128A-SW	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意