

LED T8 DC Tube & 0-10V LED Dimming Driver




Model :LT-R06 / LT-R12/LT-R15 + DC-2x20W-010


1. Uniform light emission
2. High luminous output 100-150lm/w & lower power consumption
3. SPM Design - Power circuit protection to cut off individual LEDs when mal-function
4. T8 tube body to achieve the best light effect
5. Control mode: 0-10V
6. Dimming range from 0-100 %
7. Compliant with safety extra low voltage standard.
8. THD < 15%
9. Flicker Free



Model:LT-R06 / LT-R12 / LT-R15

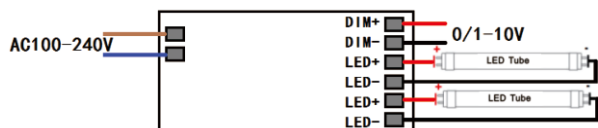

Model:DC-2x20W-010

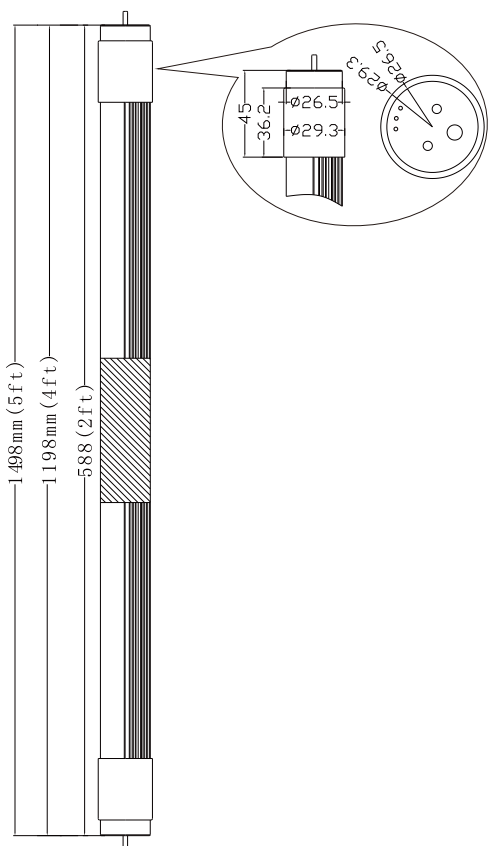

Standard

Tube Dimension	∅ 26.5mm*588/1198/1498mm
Voltage (V)	DC30~42V
Lamp Holder	G13
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100-150 lm/w
Power Factor	> 0.90
THD	< 15%
	9W / 100lm/W / Total 900lm
	9W / 120lm/W / Total 1080lm
	9W / 140lm/W / Total 1260lm
	9W / 150lm/W / Total 1350lm
	18W / 100lm/W / Total 1800lm
	18W / 120lm/W / Total 2160lm
	18W / 140lm/W / Total 2520lm
	18W / 150lm/W / Total 2700lm
	22W / 100lm/W / Total 2200lm
	22W / 120lm/W / Total 2640lm
	22W / 140lm/W / Total 3080lm
	22W / 150lm/W / Total 3300lm
Cover Material	Aluminium , PC Cover
Color Temperature	2700K/3000K/4000K/6000K
Life Time	50,000(H)
EMC	EN55015:2013+A1:2015 EN61000-3-2:2014 EN61000-3-3:2013 EN60547:2009
LVD	EN61347-1:2015 EN61347-2-13:2014