


# Track Light

## Series Type: TL-OR

### Features 產品特點 >>

- Material: high quality aluminum alloy profile + PC reflector with lens
- Dark light Aluminum reflector UGR<19
- Uniform light emission without flicker
- The position can be adjusted in multiple directions as required
- Application: shopping malls, jewelry, brand clothing, high-end clubs, professional windows, counters and other key lighting places
- Certificate: CE RoHS

- 材质: 优质铝合金型材+带透镜的PC反光镜
- 暗光铝反射镜UGR <19
- 发光均匀, 无频闪
- 照射位置可根据需要进行多个方位调整
- 应用场所: 商场、珠宝首饰、品牌服饰、高档会所、专业橱窗、柜台等重点照明场所
- 证书: CE RoHS

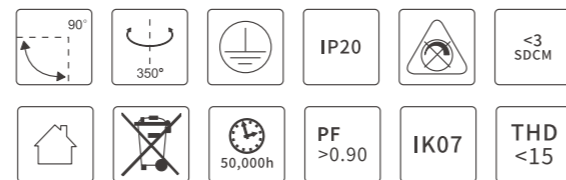

### Specification 產品規格 >>

Model 型號	Voltage 電壓 (V)	Power 功率 (W)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Colour Temp 色溫 (K)	Life Time 壽命 (H)	Beam Angle 光束角 (°)	Working temperature 工作溫度 (°C)	Size 尺寸 (mm)
TL-A15-H108E-OR	100~240	15	100	>80	2700/3000/4000/5000	50000	15/24/38/60	-20~45	90*108
TL-A20-H108E-OR	100~240	20	100	>80	2700/3000/4000/5000	50000	15/24/38/60	-20~45	90*108
TL-A30-H108E-OR	100~240	30	100	>80	2700/3000/4000/5000	50000	15/24/38/60	-20~45	90*108

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Size Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度, 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意


# Track Light

## Series Type: TL-F1

### Features 產品特點 >>

- Material: high quality aluminum alloy profile + PC reflector with lens
- Dark light Aluminum reflector UGR<19
- Uniform light emission without flicker
- The position can be adjusted in multiple directions as required
- Application: shopping malls, jewelry, brand clothing, high-end clubs, professional windows, counters and other key lighting places
- Certificate: CE RoHS

- 材质: 优质铝合金型材+带透镜的PC反光镜
- 暗光铝反射镜UGR <19
- 发光均匀, 无频闪
- 照射位置可根据需要进行多个方位调整
- 应用场所: 商场、珠宝首饰、品牌服饰、高档会所、专业橱窗、柜台等重点照明场所
- 证书: CE RoHS

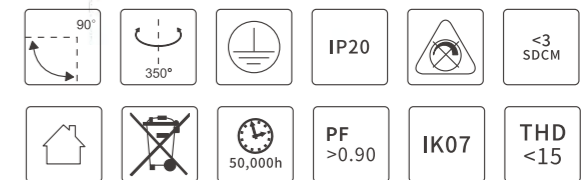

### Specification 產品規格 >>

Model 型號	Voltage 電壓 (V)	Power 功率 (W)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Colour Temp 色溫 (K)	Life Time 壽命 (H)	Beam Angle 光束角 (°)	Working temperature 工作溫度 (°C)	Size 尺寸 (mm)
TL-A15-H108E-F1	100~240	15	100	>80	2700/3000/4000/5000	50000	15/24/38/60	-20~45	62*140
TL-A20-H108E-F1	100~240	20	100	>80	2700/3000/4000/5000	50000	15/24/38/60	-20~45	90*165
TL-A30-H108E-F1	100~240	30	100	>80	2700/3000/4000/5000	50000	15/24/38/60	-20~45	90*165

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Size Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度, 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意