

Commercial LED T8 Tube



Lighting Source


Model : LT-I-L

Features:

1. Uniform light emission
2. High luminous output (100~150 lm/W) & low power consumption
3. Retrofit to existing T8 lights on EM or Electronic gear.
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. Optional: rotary end knob for angle adjustment



Model:LT-I-L

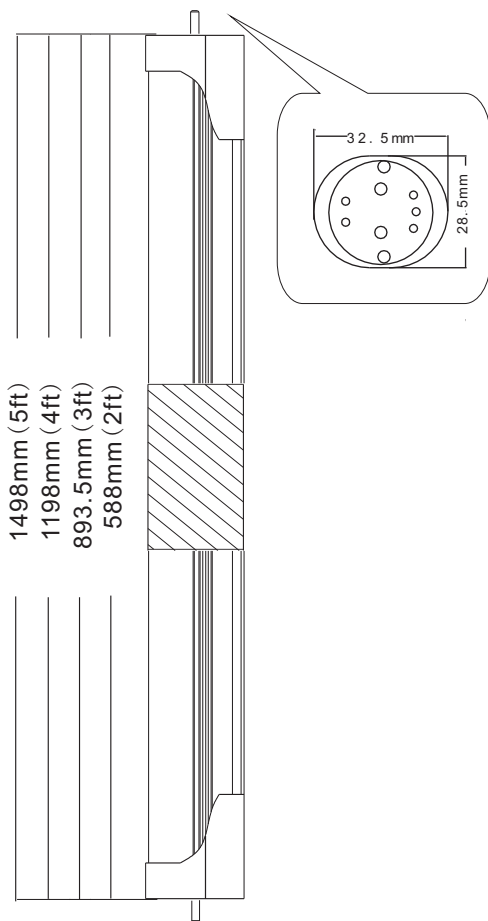

Standard

Tube Dimension	Ø26.5mm*588/893.5/1198/1498mm		
Voltage (V)	AC85~265V		
Lamp Holder	T8, G13		
Beam Angle	180 degree		
CRI	>80Ra		
Luminous Efficacy	100~150 lm/w		
Power Factor	> 0.90		
Power (W)	LT-I0609-L 9W LT-I1218-L 18W	LT-I0912-L 12W LT-I1522-L 22W	
Cover Material	Aluminium , PC Cover		
Color Temperature	2700K-6500K		
Life Time	50,000(H)		
EMC	EN55015:2013 EN61547:2009 EN61000-3-2:2006+A1:2009+A2:2009 EN61000-3-3:2013		
LVD	EN60598-2-1:1989 EN60598-1:2008+A11:2009		