

# Infrared Sensor LED T8 Tube




Series Type: IR



Flick Free  
(無閃頻)  
保護視力

## Features 產品特點 >>

- Uniform light emission
- High luminous output & low power consumption
- SPM design – Power circuit protection to cut off individual LEDs when mal-functioned
- Exit Time 15-60 seconds
- Detection distance(6-8m)
- 發光均勻
- 高流明輸出的同時低功耗
- SPM設計即電源電路保護，在故障時可立即切斷單個LED電路
- 退出時間15-60秒
- 探測距離 (6-8米)

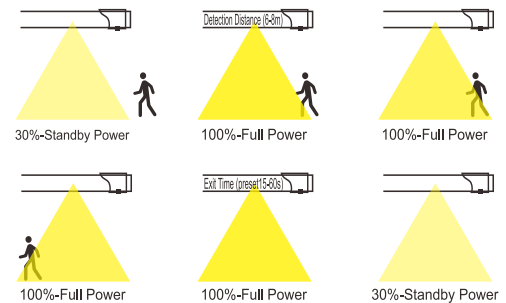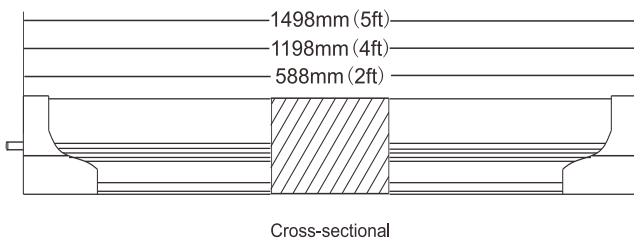

## Specification 產品規格 >>

Model 型號	Voltage 電壓 (V)	Wattage 功率 (W)	Length 長度 (mm)	Lamp Life 光度壽命 (Hrs)	Colour Temp 色溫 (K)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	PCS/CTN 每箱數量 (pcs)
LT-I0609-IR128A	100~240	9	600	50000	6000	120	>80	25
LT-I1218-IR128A	100~240	18	1200	50000	6000	120	>80	25
LT-I1522-IR128A	100~240	22	1500	50000	6000	120	>80	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%
- 此型號認證可由實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意