

TSA (300W-1000W)

投射灯
专业户外照明

PROJECTION LAMP

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Lightweight finned heat dissipation structure, lightweight, high safety, excellent heat dissipation performance
轻巧鳍片式散热结构, 重量轻, 安全性高, 散热性能优异
Optical PC lens+high steel glass treatment, IK08 anti-collision grade, UV resistance, light transmittance of 94%
光学PC透镜+高钢化玻璃处理, IK08防撞等级, 抗UV, 透光率94%
Port, dock, tower crane, golf course, football field and other sports stadium lighting
港口, 码头, 塔吊, 高尔夫球场, 足球场、广场等体育场照明
Lamp pole installation, working environment:- 35°C~+50°C
灯杆安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TSA300	IL-TSA400	IL-TSA500	IL-TSA600	IL-TSA800	IL-TSA1000
Dimension尺寸(mm)	394*372*163	394*372*163	515*372*163	515*372*163	576*473*163	576*473*163
Power功率	300W	400W	500W	600W	800W	1000W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	130LM/W±10%					
Total Flux(lm)光通量	39000lm	52000lm	65000lm	78000lm	104000lm	130000lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle发光角度	30°/60°/90°					
IP Grade防护等级	IP65					

Optical pattern diagram 光型图



Application scenarios 应用场景



TSB (300W-1000W)

投射灯
专业户外照明

PROJECTION LAMP

CE RoHS 5YEAR WARRANTY




Imported Lumileds light source, high brightness, low light decay, long lifespan
进口Lumileds光源, 高亮度、低光衰、寿命长
Lightweight finned heat dissipation structure, lightweight, high safety, excellent heat dissipation performance
轻巧鳍片式散热结构, 重量轻, 安全性高, 散热性能优异
Optical PC lens+high steel glass treatment, IK08 anti-collision grade, UV resistance, light transmittance of 94%
光学PC透镜+高钢化玻璃处理, IK08防撞等级, 抗UV, 透光率94%
Port, dock, tower crane, golf course, football field and other sports stadium lighting
港口, 码头, 塔吊, 高尔夫球场, 足球场、广场等体育场照明
Lamp pole installation, working environment:- 35°C~+50°C
灯杆安装, 工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TSB300	IL-TSB400	IL-TSB500	IL-TSB600	IL-TSB800	IL-TSB1000
Dimension尺寸(mm)	469*469*191	469*469*191	553*553*191	553*553*191	648*620*200	648*620*200
Power功率	300W	400W	500W	600W	800W	1000W
Voltage输入电压	AC100-277V 50/60Hz					
LED Brand 芯片品牌	Lumileds					
CRI显指	Ra>70/80					
Efficiency光效	130LM/W±10%					
Total Flux(lm)光通量	39000lm	52000lm	65000lm	78000lm	104000lm	130000lm
CCT色温	3000K/4000K/5000K/5700K/6500K					
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics					
Beam Angle发光角度	30°/60°					
IP Grade防护等级	IP65					

Optical pattern diagram 光型图



Application scenarios 应用场景



TSX (300W-1000W)

投射灯
专业户外照明

PROJECTION LAMP

CE RoHS 5YEAR WARRANTY





Imported CREE light source, high brightness, low light decay, long lifespan
进口CREE光源, 高亮度、低光衰、寿命长
Lightweight finned heat dissipation structure, lightweight, high safety, excellent heat dissipation performance
轻巧鳍片式散热结构, 重量轻, 安全性高, 散热性能优异
Ultra high tempered glass technology, IK08 anti-collision grade, UV resistance, 94% light transmittance
超高钢化玻璃工艺, IK08防撞等级, 抗UV, 透光率94%
Landscape lighting, bridges, building stairs, squares, theme parks, and other lighting fixtures
景观亮化、桥梁、建筑楼梯、广场、主题公园等亮化照明
Working environment: -35°C~+50°C
工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TSX300	IL-TSX500	IL-TSX800	IL-TSX1000
Dimension尺寸(mm)	394*372*163	515*372*163	576*472*163	576*472*163
Power功率	300W	500W	800W	1000W
Voltage输入电压	AC100-277V 50/60Hz			
LED Brand 芯片品牌	CREE			
CRI显指	Ra>70/80			
Efficiency光效	100LM/W±10%			
Total Flux(lm)光通量	15000lm	30000lm	45000lm	60000lm
CCT色温	3000K/4000K/5000K/5700K/6500K/RGBW			
LED Driver 驱动电源	MEAN WELL / MOSO / Inventronics			
Beam Angle发光角度	8°/10°/15°/25°/40°/60°			
IP Grade防护等级	IP65			

Optical pattern diagram 光型图

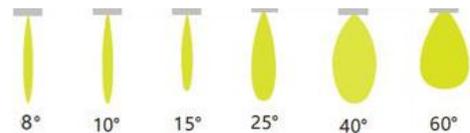

Application scenarios 应用场景



TSD (150W-1000W)

投射灯
专业户外照明

PROJECTION LAMP

CE RoHS 5YEAR WARRANTY




Imported CREE light source, high brightness, low light decay, long lifespan
进口CREE光源, 高亮度、低光衰、寿命长
Fin aluminum+copper tube design, high-quality heat dissipation, anti-corrosion and rust proof, durable and long-lasting
独创的鳍片铝+铜管设计, 高品质导热, 整灯防腐防锈, 持久耐用
Ultra high tempered glass technology, IK08 anti-collision grade, UV resistance, 94% light transmittance
超高钢化玻璃工艺, IK08防撞等级, 抗UV, 透光率94%
Skyscrapers, entertainment venues, large shopping malls, bridges, docks, TV towers, sculptures, fishing boat lighting
摩天大厦、娱乐场、大型商场、桥梁、码头、电视塔、雕塑、渔船照明
Working environment: -35°C~+50°C
工作环境: -35°C~+50°C

Product specs 产品参数

Model 产品型号	IL-TSD200	IL-TSD400	IL-TSD600	IL-TSD800	IL-TSD1000
Dimension尺寸(mm)	345*268*369	356*270*369	407*330*471	496*412*472	496*412*472
Power功率	150W/200W	300W/400W	500W/600W	800W	1000W
Voltage输入电压	AC100-277V 50/60Hz				
LED Brand 芯片品牌	CREE				
CRI显指	Ra>70/80				
Efficiency光效	100LM/W±10%				
Total Flux(lm)光通量	15000/20000lm	30000/40000lm	50000/60000lm	80000lm	100000lm
CCT色温	3000K/4000K/5000K/5700K/6500K/RGBW				
LED Driver 驱动电源	MEAN WELL / MOSO / inventronics				
Beam Angle发光角度	5°/10°/20°/30°/60°				
IP Grade防护等级	IP65				

Optical pattern diagram 光型图

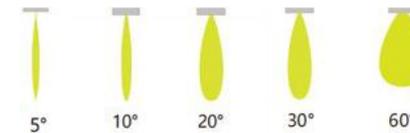

Application scenarios 应用场景

