


Manual Preset Dimming DC Manual Dim Tube & 0-10V Driver

Series Type: R-MD




Features 產品特點 >>


- Flicker free
- Dimming interface : 0-10V Dim
- Dimming range from 100% to (100%, 85%, 75%, 50%)
- 無閃頻
- 調光介面: 0-10V調光
- 調光範圍從100%到(100%, 85%, 75%, 50%)

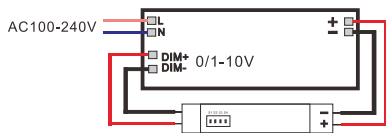

| S1 | S2 | S3 | S4 | Power |
|-----|-----|-----|-----|-------|
| OFF | OFF | OFF | OFF | 100% |
| OFF | OFF | ON | OFF | 85% |
| OFF | ON | OFF | OFF | 75% |
| ON | OFF | OFF | OFF | 50% |



Model:DC-LT12-DIM-010

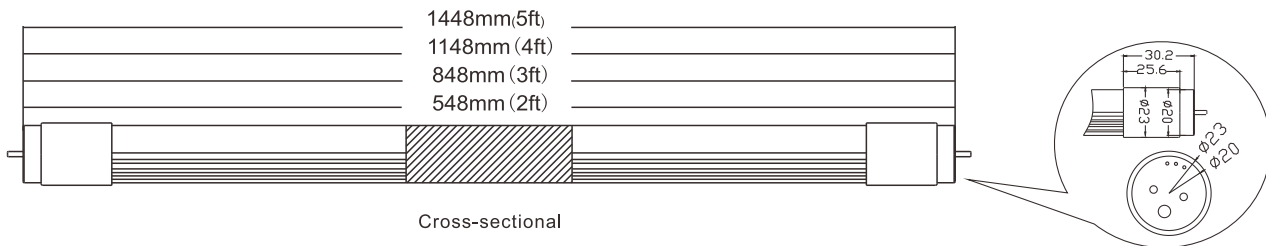

Specification 產品規格 >>

| Model 型號 | Voltage 電壓 | Wattage 功率 | Length 長度 | Lamp Life 光度壽命 | Colour Temp 色溫 | Lumen Output 輸出流明 | Color Rendering 顯色度 | Lamp Base 燈腳 | PCS/CTN 每箱數量 |
|------------------|---------------|---------------|--------------|-------------------|-------------------|----------------------|------------------------|-----------------|-----------------|
| | (V) | (W) | (mm) | (Hrs) | (K) | (Lm/W) | (CRI) | | (pcs) |
| LT-R60610-MD128A | 30-42 | 10 | 600 | 50000 | 4000 | 120 | >80 | T5,G5 | 25 |
| LT-R60913-MD128A | 30-42 | 13 | 900 | 50000 | 4000 | 120 | >80 | T5,G5 | 25 |
| LT-R61219-MD128A | 30-42 | 19 | 1200 | 50000 | 4000 | 120 | >80 | T5,G5 | 25 |
| LT-R61524-MD128A | 30-42 | 24 | 1500 | 50000 | 4000 | 120 | >80 | T5,G5 | 25 |

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意