

LED PLC Tube


Model : IPL-C03-H108A

Features:

1. Low energy consumption with high luminous output
2. 360 degree rotatable base angles
3. Aluminum body with PC lens (clear or milky)
4. Comply to FSD COP PPA-104A with electro-magnetic driver & hot wired test 850°C



Model : IPL-C03-H108A

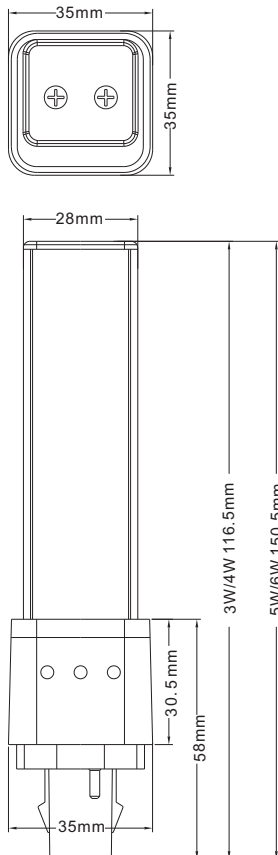

Standard

Standard Size(mm)	35*35*116.5mm
Voltage (V)	AC85~265V
Lamp Holder	G24
Beam Angle	120 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	3W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
Operating Temperature	-20~40°C
Lux in 2 m	25Lux
IP Grade	IP 20