

Programmable Photosensor Sensor T8 Tube

Series Type: PD





光敏感應
參數預設

Flick Free
(無閃頻)
保護視力

Features 產品特點 >>

- Photosensitive range: 10lux-300lux
- The lamp sleep brightness can be set to 0% - 90%
- The sleep power of the lamp tube is 0-16w (can be set as required)
- Delay / exit time in standby mode: 5s-60s
- SPM design: power circuit protection, cutting off a single LED in case of failure
- Applicable to: underground parking lot, government, school, hospital, shopping mall, bank and other places requiring long-time lighting every day
- 光敏範圍: 10LUX-300LUX
- 燈管休眠亮度可設置0%-90%
- 燈管休眠功率為0-16W (可根據需要設置)
- 待機狀態下延時/退出時間5秒-60秒
- SPM設計: 電源電路保護, 在故障時切斷單個LED
- 適用於: 地下停車場、政府、學校、醫院、商場、銀行等每天需長時間照明的場所

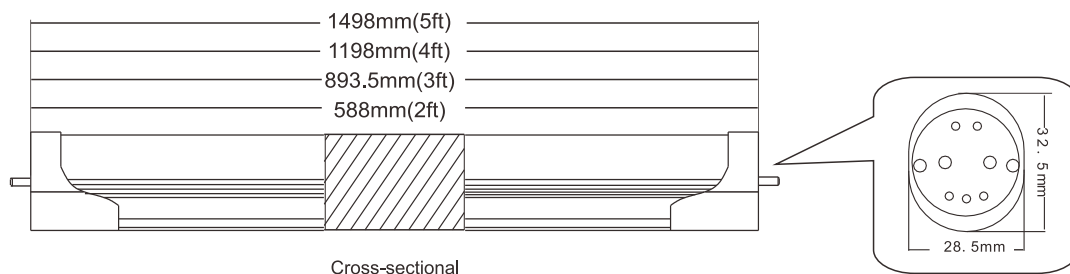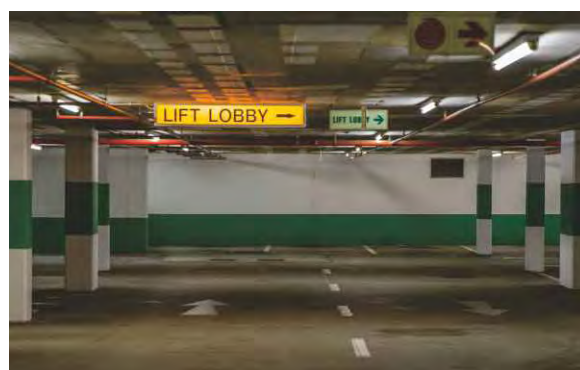

LUX				TIME				
1	2	3	4	1	2	3	4	
●	○	○	○	0%	●	○	○	5S
○	○	○	○	10%	○	●	○	10S
○	○	○	○	20%	○	○	●	20S
○	○	○	○	30%	○	○	○	30S
○	○	○	○	40%	○	○	○	40S
○	○	○	○	50%	○	○	○	50S
○	○	○	○	60%	○	○	○	1m
○	○	○	○	70%	○	○	○	2m
○	○	○	○	80%	○	○	○	3m
○	○	○	○	90%	○	○	○	5m
○	○	○	○	3steps	○	○	○	10m
○	○	○	○		○	○	○	20m
○	○	○	○		○	○	○	30m
○	○	○	○		○	○	○	60m
○	○	○	○		○	○	○	OFF

Specification 產品規格 >>

Model 型號	Voltage 電壓 (V)	Wattage 功率 (W)	Length 長度 (mm)	Lamp Life 光度壽命 (Hrs)	Colour Temp 色溫 (K)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Lamp Base 燈腳	PCS/CTN 每箱數量 (pcs)
LT-I0609-PD128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I0912-PD128A	100~240	12	900	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-PD128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1522-PD128A	100~240	22	1500	50000	3000/4000/6500	120	>80	T8,G13	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意