

# WiFi IOT LED T8 Tube


Series Type: WIFI



Flick Free  
(無閃頻)  
保護視力

## Features 產品特點 >>

- WiFi adopts wireless technologies such as fast frequency hopping and time division multiple access to replace cables
- A low-cost and low-power wireless access method is provided
- Dimming Signal : wifi
- Dimming Range: 0-100%
- WiFi採用快速跳頻、時分多址等無線技術替代有線
- 提供了一種低成本、低功耗的無線接入方法
- 調光訊號: wifi
- 調光範圍: 0-100%

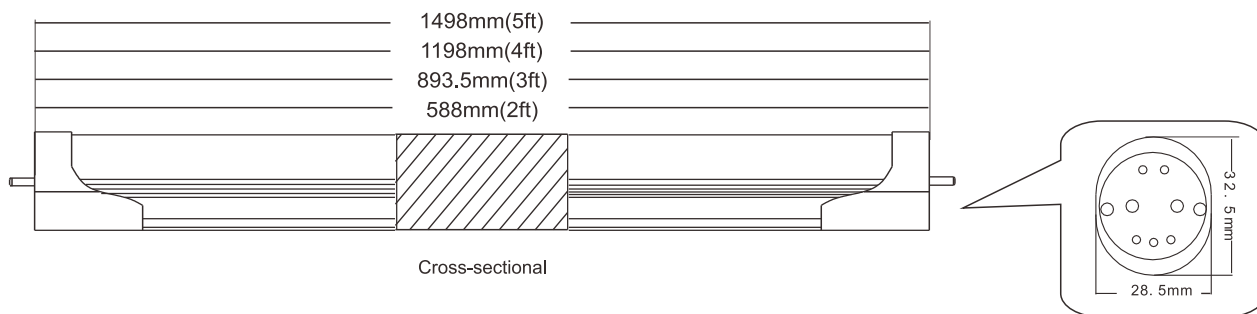

## Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	PCS/CTN 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(pcs)
LT-I0609-WIFI128A	100~240	9	600	50000	3000/4000/6500	120	>80	25
LT-I0912-WIFI128A	100~240	12	900	50000	3000/4000/6500	120	>80	25
LT-I1218-WIFI128A	100~240	18	1200	50000	3000/4000/6500	120	>80	25
LT-I1522-WIFI128A	100~240	22	1500	50000	3000/4000/6500	120	>80	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意