Aluminum LED Strip

Series Type:C2310L

Flick Free
(無閃頻)
保護視力

Features 產品特點 >>

- Material:AIR6063 Aluminum
- Size: 23mm (width) X10mm (height)
- LED cold light source, pure light color, very good display effect
- High light transmission, non-glare, natural light color, uniform light
- High thermal conductivity aluminum-based PCB board, low heat generation and good heat dissipation
- Suitable for cabinet, wardrobe, wine cabinet, display cabinet, lockers and other furniture lighting

- 燈體材料：航空6063鋁
- 尺寸: 23毫米（寬）X10毫米（高）
- LED冷光源，光色純正，非常好的展示效果
- 高透光，不刺眼，光色自然，光線均勻
- 採用高導熱鋁基PCB板，發熱量低，散熱好
- 適用於櫥櫃、衣櫃、酒櫃、展示櫃、儲物櫃等家具照明



Unit : mm

Specification 產品規格 >>

Model 型號	DC Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 光速角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(℃)
CBL-C2310L	12	12	1000	30000	3000/4000/6000	100	>90	120	-20~+45

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Length Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality

- 光效(lm/W)、功率(W)、顯色指數(CRI)、長度，可根據客戶需求定制
- 此型號標準之功率因素(PF)>0.9，總諧波指數THD<15%，可按客戶需要生產低總諧波指數< 10%
- 此型號認証由可實驗室發出之安全認証消防測試，環保物料(RoHS)，光生物安全為Exemption Group及其它測試，保証客戶使用更安心滿意

Room B3, 18/F Bonsun Industrial Building, 364-366 Sha Tsui Road, Tsuen Wan,HongKong Phone: 852-39745593 Fax: 852-35440462 info@ilighting.com.hk

Aluminum LED Strip

Series Type: C2408L

Flick Free
(無閃頻)
保護視力

Features 產品特點 >>

- Material:AIR6063 Aluminum
- Size: 24.8mm (width) X8.5mm (height)
- Emitting arc lamp, a larger lighting surface
- Light body is smooth, high brightness, lightweight and thin
- UV resistance does not change yellow, high light transmission
- Suitable for lighting of cabinets, wardrobe, wine cabinets, display cabinets, lockers and other furniture

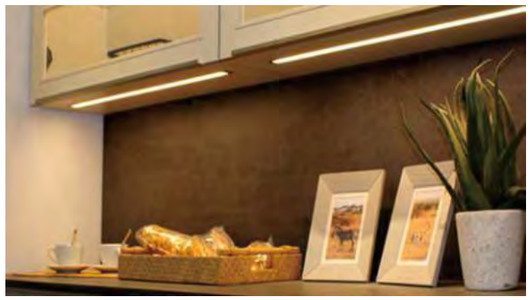

- 燈體材料：航空6063鋁
- 尺寸: 24.8毫米（寬）X8.5毫米（高）
- 微弧型發光罩，亮化面更大
- 燈體光滑，亮度高，輕質超薄
- 抗UV紫外線不變黃，高透光
- 適用於櫥櫃，衣櫃，酒櫃，展示櫃，儲物櫃等家具照明



Unit : mm

Specification 產品規格 >>

Model 型號	DC Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Beam Angle 光速角度	Operating Temperature 工作溫度
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°)	(℃)
CBL-C2408L	12	12	1000	30000	3000/4000/6000	100	>90	120	-20~+45

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Length Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality

- 光效(lm/W)、功率(W)、顯色指數(CRI)、長度，可根據客戶需求定制
- 此型號標準之功率因素(PF)>0.9，總諧波指數THD<15%，可按客戶需要生產低總諧波指數< 10%
- 此型號認証由可實驗室發出之安全認証消防測試，環保物料(RoHS)，光生物安全為Exemption Group及其它測試，保証客戶使用更安心滿意